
Ironic Inspector Documentation

Release 12.4.0.dev8

OpenStack Foundation

Nov 29, 2024

CONTENTS

1	Introduction	3
2	Release Notes	5
3	Using Ironic Inspector	7
3.1	Install Guide	7
3.2	Command References	16
3.3	Configuration Guide	17
3.4	User Guide	94
3.5	Administrator Guide	106
4	Contributor Docs	111
4.1	How To Contribute	111
5	Indices and tables	179
Python Module Index		181
Index		183

Warning

This project is now in the maintenance mode and new deployments of it are discouraged. Please use [built-in in-band inspection in ironic](#) instead. For existing deployments, see the [migration guide](#).

**CHAPTER
ONE**

INTRODUCTION

This is an auxiliary service for discovering hardware properties for a node managed by [Ironic](#). Hardware introspection or hardware properties discovery is a process of getting hardware parameters required for scheduling from a bare metal node, given its power management credentials (e.g. IPMI address, user name and password).

- Free software: Apache license
- Source: <https://opendev.org/openstack/ironic-inspector/>
- Bugs: <https://bugs.launchpad.net/ironic-inspector>
- Downloads: <https://tarballs.openstack.org/ironic-inspector/>
- Documentation: <https://docs.openstack.org/ironic-inspector/latest/>
- Python client library and CLI tool: [python-ironic-inspector-client](#) ([documentation](#)).

Note

ironic-inspector was called *ironic-discoverd* before version 2.0.0.

**CHAPTER
TWO**

RELEASE NOTES

For information on any current or prior version, see [the release notes](#).

USING IRONIC INSPECTOR

3.1 Install Guide

Install from PyPI (you may want to use virtualenv to isolate your environment):

```
pip install ironic-inspector
```

Also there is a DevStack plugin for **ironic-inspector** - see [How To Contribute](#) for the current status.

Finally, some distributions (e.g. Fedora) provide **ironic-inspector** packaged, some of them - under its old name *ironic-discoverd*.

There are several projects you can use to set up **ironic-inspector** in production. [puppet-ironic](#) provides Puppet manifests, while [bifrost](#) provides an Ansible-based standalone installer. Refer to [Configuration](#) if you plan on installing **ironic-inspector** manually.

Note

Please beware of [possible DNS issues](#) when installing **ironic-inspector** on Ubuntu.

3.1.1 Sample Configuration Files

To generate a sample configuration file, run the following command from the top level of the code tree:

```
tox -e genconfig
```

For a pre-generated sample configuration file, see [Ironic Inspector Configuration Options](#).

To generate a sample policy file, run the following command from the top level of the code tree:

```
tox -e genpolicy
```

For a pre-generated sample configuration file, see [Ironic Inspector Policy](#).

3.1.2 Installation options

Starting with Train release, **ironic-inspector** can run in a non-standalone mode, which means **ironic-inspector** API and **ironic-inspector conductor** are separated services, they can be installed on the same host or different hosts.

Following are some considerations when you run **ironic-inspector** in non-standalone mode:

- Additional packages may be required depending on the tooz backend used in the installation. For example, `etcd3gw` is required if the backend driver is configured to use `etcd3+http://`, `pymemcache` is required to use `memcached://`. Some distributions may provide packages like `python3-etcd3gw` or `python3-memcache`. Supported drivers are listed at [Tooz drivers](#).
- For ironic-inspector running in non-standalone mode, PXE configuration is only required on the node where ironic-inspector conductor service is deployed.
- Switch to a database backend other than sqlite.

3.1.3 Configuration

Copy the sample configuration files to some permanent place (e.g. `/etc/ironic-inspector/inspector.conf`). Fill in these minimum configuration values:

- The `standalone` in the `DEFAULT` section - This determines whether ironic-inspector services are intended to be deployed separately.
- The `keystone_auth_token` section - credentials to use when checking user authentication.
- The `ironic` section - credentials to use when accessing `ironic` API. When `ironic` is deployed standalone with no authentication, specify the following:

```
[ironic]
auth_type=none
```

When `ironic` is deployed standalone with HTTP Basic authentication, valid credentials are also required:

```
[ironic]
auth_type=http_basic
username=myName
password=myPassword
```

- `connection` in the `database` section - SQLAlchemy connection string for the database. By default ironic-inspector uses sqlite as the database backend, if you are running ironic-inspector in a non-standalone mode, please change to other database backends.
- `dnsmasq_interface` in the `iptables` section - interface on which dnsmasq (or another DHCP service) listens for PXE boot requests (defaults to `br-ctlplane` which is a sane default for `tripleo`-based installations but is unlikely to work for other cases).
- if you wish to use the dnsmasq PXE/DHCP filter driver rather than the default `iptables` driver, see the [dnsmasq PXE filter](#) description.
- `store_data` in the `processing` section defines where introspection data is stored and takes one of three values:

none

introspection data is not stored (the default)

database

introspection data is stored in the database (recommended for standalone deployments)

swift

introspection data is stored in the Object Store service (recommended for full openstack deployments)

Note

It is possible to create third party storage backends using the `ironic_inspector.introspection_data.store` entry point.

See comments inside *the sample configuration* for other possible configuration options.

Note

Configuration file contains a password and thus should be owned by `root` and should have access rights like `0600`.

Here is an example `inspector.conf` (adapted from a gate run):

```
[DEFAULT]
debug = false
rootwrap_config = /etc/ironic-inspector/rootwrap.conf

[database]
connection = mysql+pymysql://root:<PASSWORD>@127.0.0.1/ironic_inspector?
    ↪charset=utf8

[pxe_filter]
driver=iptables

[iptables]
dnsmasq_interface = br-ctlplane

[ironic]
os_region = RegionOne
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity
auth_type = password

[keystone_auth_token]
www_authenticate_uri = http://127.0.0.1/identity
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity_v2_admin
auth_type = password

[processing]
ramdisk_logs_dir = /var/log/ironic-inspector/ramdisk
store_data = swift

[swift]
```

(continues on next page)

(continued from previous page)

```
os_region = RegionOne
project_name = service
password = <PASSWORD>
username = ironic-inspector
auth_url = http://127.0.0.1/identity
auth_type = password
```

Note

Set `debug = true` if you want to see complete logs.

ironic-inspector requires root rights for managing iptables. It gets them by running **ironic-inspector-rootwrap** utility with sudo. To allow it, copy file `rootwrap.conf` and directory `rootwrap.d` to the configuration directory (e.g. `/etc/ironic-inspector/`) and create file `/etc/sudoers.d/ironic-inspector-rootwrap` with the following content:

```
Defaults:stack !requiretty
stack ALL=(root) NOPASSWD: /usr/bin/ironic-inspector-rootwrap /etc/ironic-
↪inspector/rootwrap.conf *
```

Danger

Be very careful about typos in `/etc/sudoers.d/ironic-inspector-rootwrap` as any typo will break sudo for **ALL** users on the system. Especially, make sure there is a new line at the end of this file.

Note

`rootwrap.conf` and all files in `rootwrap.d` must be writeable only by root.

Note

If you store `rootwrap.d` in a different location, make sure to update the `filters_path` option in `rootwrap.conf` to reflect the change.

If your `rootwrap.conf` is in a different location, then you need to update the `rootwrap_config` option in `ironic-inspector.conf` to point to that location.

Replace `stack` with whatever user you'll be using to run **ironic-inspector**.

Configuring IPA

`ironic-python-agent` is a ramdisk developed for **ironic** and support for **ironic-inspector** was added during the Liberty cycle. This is the default ramdisk starting with the Mitaka release.

Note

You need at least 2 GiB of RAM on the machines to use IPA built with `diskimage-builder` and at least 384 MiB to use the *TinyIPA*.

To build an **ironic-python-agent** ramdisk, use `ironic-python-agent-builder`. Alternatively, you can download a [prebuild image](#).

For local testing and CI purposes you can use a [TinyIPA image](#).

Configuring PXE

For the PXE boot environment, you'll need:

- TFTP server running and accessible (see below for using *dnsmasq*). Ensure `pxelinux.0` is present in the TFTP root.
- Copy `ironic-python-agent.kernel` and `ironic-python-agent.initramfs` to the TFTP root as well.
- Next, setup `$TFTPROOT/pxelinux.cfg/default` as follows:

```
default introspect

label introspect
kernel ironic-python-agent.kernel
append initrd=ironic-python-agent.initramfs ipa-inspection-callback-
    ↳url=http://{IP}:5050/v1/continue systemd.journald.forward_to_console=yes
ipappend 3
```

Replace {IP} with IP of the machine (do not use loopback interface, it will be accessed by ramdisk on a booting machine).

Note

While `systemd.journald.forward_to_console=yes` is not actually required, it will substantially simplify debugging if something goes wrong. You can also enable IPA debug logging by appending `ipa-debug=1`.

IPA is pluggable: you can insert introspection plugins called *collectors* into it. For example, to enable a very handy logs collector (sending ramdisk logs to **ironic-inspector**), modify the append line in `$TFTPROOT/pxelinux.cfg/default`:

```
append initrd=ironic-python-agent.initramfs ipa-inspection-callback-
    ↳url=http://{IP}:5050/v1/continue ipa-inspection-collectors=default,logs,
    ↳systemd.journald.forward_to_console=yes
```

Note

You probably want to always keep the default collector, as it provides the basic information required for introspection.

- You need PXE boot server (e.g. `dnsmasq`) running on **the same** machine as **ironic-inspector**. Dont do any firewall configuration: **ironic-inspector** will handle it for you. In **ironic-inspector** configuration file set `dnsmasq_interface` to the interface your PXE boot server listens on. Here is an example `dnsmasq.conf`:

```
port=0
interface={INTERFACE}
bind-interfaces
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}
enable-tftp
tftp-root={TFTP ROOT, e.g. /tftpboot}
dhcp-boot=pxelinux.0
dhcp-sequential-ip
```

Note

`dhcp-sequential-ip` is used because otherwise a lot of nodes booting simultaneously cause conflicts - the same IP address is suggested to several nodes.

Configuring iPXE

iPXE allows better scaling as it primarily uses the HTTP protocol instead of slow and unreliable TFTP. You still need a TFTP server as a fallback for nodes not supporting iPXE. To use iPXE, youll need:

- TFTP server running and accessible (see above for using `dnsmasq`). Ensure `undionly.kpxe` is present in the TFTP root. If any of your nodes boot with UEFI, youll also need `ipxe.efi` there.
- You also need an HTTP server capable of serving static files. Copy `ironic-python-agent.kernel` and `ironic-python-agent.initramfs` there.
- Create a file called `inspector.ipxe` in the HTTP root (you can name and place it differently, just dont forget to adjust the `dnsmasq.conf` example below):

```
#!ipxe

:retry_dhcp
dhcp || goto retry_dhcp

:retry_boot
imgfree
kernel --timeout 30000 http://{IP}:8088/ironic-python-agent.kernel ipa-
  ↵inspection-callback-url=http://{IP}>:5050/v1/continue systemd.journald.
  ↵forward_to_console=yes BOOTIF=${mac} initrd=agent.ramdisk || goto retry_
  ↵boot
initrd --timeout 30000 http://{IP}:8088/ironic-python-agent.ramdisk ||_
  ↵goto retry_boot
boot
```

Note

Older versions of the iPXE ROM tend to misbehave on unreliable network connection, thus we use the timeout option with retries.

Just like with PXE, you can customize the list of collectors by appending the `ipa-inspection-collectors` kernel option. For example:

```
ipa-inspection-collectors=default,logs,extra_hardware
```

- Just as with PXE, you'll need a PXE boot server. The configuration, however, will be different. Here is an example `dnsmasq.conf`:

```
port=0
interface={INTERFACE}
bind-interfaces
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}
enable-tftp
tftp-root={TFTP ROOT, e.g. /tftpboot}
dhcp-sequential-ip
dhcp-match=ipxe,175
dhcp-match=set:efi,option:client-arch,7
dhcp-match=set:efi,option:client-arch,9
dhcp-match=set:efi,option:client-arch,11
# dhcpcv6.option: Client System Architecture Type (61)
dhcp-match=set:efi6,option6:61,0007
dhcp-match=set:efi6,option6:61,0009
dhcp-match=set:efi6,option6:61,0011
dhcp-userclass=set:ipxe6,ipXE
# Client is already running iPXE; move to next stage of chainloading
dhcp-boot=tag:ipxe,http://{IP}:8088/inspector.ipxe
# Client is PXE booting over EFI without iPXE ROM,
# send EFI version of iPXE chainloader
dhcp-boot=tag:efi,tag:!ipxe,ipxe.efi
dhcp-option=tag:efi6,tag:!ipxe6,option6:bootfile-url,tftp://{IP}/ipxe.efi
# Client is running PXE over BIOS; send BIOS version of iPXE chainloader
dhcp-boot=undionly.kpxe,localhost.localdomain,{IP}
```

First, we configure the same common parameters as with PXE. Then we define `ipxe` and `efi` tags for IPv4 and `ipxe6` and `efi6` for IPv6. Nodes already supporting iPXE are ordered to download and execute `inspector.ipxe`. Nodes without iPXE booted with UEFI will get `ipxe.efi` firmware to execute, while the remaining will get `undionly.kpxe`.

Configuring PXE for aarch64

For aarch64 Bare Metals, the PXE boot environment is basically the same as x86_64, you'll need:

- TFTP server running and accessible (see below for using `dnsmasq`). Ensure `grubaa64.efi` is present in the TFTP root. The firmware can be retrieved from the installation distributions for aarch64.
- Copy `ironic-agent.kernel` and `ironic-agent.initramfs` to the TFTP root as well.

Note that the ramdisk needs to be pre-built on an aarch64 machine with tools like `ironic-python-agent-builder`, see <https://docs.openstack.org/ironic-python-agent-builder/latest/admin/dib.html> for how to build ramdisk for aarch64.

- Next, setup `$TFTPROOT/EFI/BOOT/grub.cfg` as follows:

```
set default="1"
set timeout=5

menuentry 'Introspection for aarch64' {
    linux ironic-agent.kernel text showopts selinux=0 ipa-inspection-
    ↪callback-url=http://{IP}:5050/v1/continueipa-inspection-
    ↪collectors=defaultipa-collect-lldp=1systemd.journald.forward_to_
    ↪console=no
    initrd ironic-agent.initramfs
}
```

Replace {IP} with IP of the machine (do not use loopback interface, it will be accessed by ramdisk on a booting machine).

- Update DHCP options for aarch64, here is an example `dnsmasq.conf`:

```
port=0
interface={INTERFACE}
bind-interfaces
dhcp-range={DHCP IP RANGE, e.g. 192.168.0.50,192.168.0.150}
enable-tftp
dhcp-match=aarch64, option:client-arch, 11 # aarch64
dhcp-boot=tag:aarch64, grubaa64.efi
tftp-root={TFTP ROOT, e.g. /tftpboot}
dhcp-sequential-ip
```

Configuring PXE for Multi-arch

If the environment consists of bare metals with different architectures, normally different ramdisks are required for each architecture. The grub built-in variable `grub_cpu` could be used to locate the correct config file for each of them.

For example, setup `$TFTPROOT/EFI/BOOT/grub.cfg` as following:

```
set default=master
set timeout=5
set hidden_timeout_quiet=false

menuentry "master" {
configfile /tftpboot/grub-${grub_cpu}.cfg
}
```

Prepare specific grub config for each existing architectures, e.g. `grub-arm64.cfg` for ARM64 and `grub-x86_64.cfg` for x86_64.

Update dnsmasq configuration to contain options for supported architectures.

3.1.4 Managing the ironic-inspector Database

ironic-inspector provides a command line client for managing its database. This client can be used for upgrading, and downgrading the database using `alembic` migrations.

If this is your first time running **ironic-inspector** to migrate the database, simply run:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf
→upgrade
```

If you have previously run a version of **ironic-inspector** earlier than 2.2.0, the safest thing is to delete the existing SQLite database and run `upgrade` as shown above. However, if you want to save the existing database, to ensure your database will work with the migrations, you'll need to run an extra step before upgrading the database. You only need to do this the first time running version 2.2.0 or later.

If you are upgrading from **ironic-inspector** version 2.1.0 or lower:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf
→stamp --revision 578f84f38d
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf
→upgrade
```

If you are upgrading from a git master install of the **ironic-inspector** after *rules* were introduced:

```
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf
→stamp --revision d588418040d
ironic-inspector-dbsync --config-file /etc/ironic-inspector/inspector.conf
→upgrade
```

Other available commands can be discovered by running:

```
ironic-inspector-dbsync --help
```

3.1.5 Running

Running in standalone mode

Execute:

```
ironic-inspector --config-file /etc/ironic-inspector/inspector.conf
```

Running in non-standalone mode

API service can be started in development mode with:

```
ironic-inspector-api-wsgi -p 5050 -- --config-file /etc/ironic-inspector/
→inspector.conf
```

For production, the **ironic-inspector** API service should be hosted under a web service. Below is a sample configuration for Apache with module mod_wsgi:

```
Listen 5050

<VirtualHost *:5050>
```

(continues on next page)

(continued from previous page)

```
WSGIProcess ironic-inspector user=stack group=stack threads=10
display-name=%{GROUP}
WSGIScriptAlias / /usr/local/bin/ironic-inspector-api-wsgi

SetEnv APACHE_RUN_USER stack
SetEnv APACHE_RUN_GROUP stack
WSGIProcessGroup ironic-inspector

ErrorLog /var/log/apache2/ironic_inspector_error.log
LogLevel info
CustomLog /var/log/apache2/ironic_inspector_access.log combined

<Directory /opt/stack/ironic-inspector/ironic_inspector/cmd>
    WSGIProcessGroup ironic-inspector
    WSGIApplicationGroup %{GLOBAL}
    AllowOverride All
    Require all granted
</Directory>
</VirtualHost>
```

You can refer to [ironic installation document](#) for more guides.

ironic-inspector conductor can be started with:

```
ironic-inspector-conductor --config-file /etc/ironic-inspector/inspector.conf
```

3.2 Command References

Here are references for commands not elsewhere documented.

3.2.1 ironic-inspector-status

Synopsis

```
ironic-inspector-status <category> <command> [<args>]
```

Description

ironic-inspector-status is a tool that provides routines for checking the status of the ironic-inspector deployment.

Options

The standard pattern for executing a **ironic-inspector-status** command is:

```
ironic-inspector-status <category> <command> [<args>]
```

Run without arguments to see a list of available command categories:

```
ironic-inspector-status
```

Categories are:

- upgrade

Detailed descriptions are below.

You can also run with a category argument such as upgrade to see a list of all commands in that category:

```
ironic-inspector-status upgrade
```

These sections describe the available categories and arguments for **ironic-inspector-status**.

Upgrade

ironic-status upgrade check

Performs a release-specific readiness check before restarting services with new code. This command expects to have complete configuration and access to databases and services.

Return Codes

Return code	Description
0	All upgrade readiness checks passed successfully and there is nothing to do.
1	At least one check encountered an issue and requires further investigation. This is considered a warning but the upgrade may be OK.
2	There was an upgrade status check failure that needs to be investigated. This should be considered something that stops an upgrade.
255	An unexpected error occurred.

History of Checks

Wallaby

- Adds initial status check command as it was not previously needed as the database structure and use of ironic-inspectors of ironic-inspector did not require the command previously.
- Adds a check to validate the configured policy file is not JSON based as JSON based policies have been deprecated.

3.3 Configuration Guide

The ironic-inspector service operation is defined by a configuration file. The overview of configuration file options follow.

3.3.1 ironic-inspector.conf

DEFAULT

debug

Type

boolean

Default

False

Mutable

This option can be changed without restarting.

If set to true, the logging level will be set to DEBUG instead of the default INFO level.

log_config_append

Type

string

Default

<None>

Mutable

This option can be changed without restarting.

The name of a logging configuration file. This file is appended to any existing logging configuration files. For details about logging configuration files, see the Python logging module documentation. Note that when logging configuration files are used then all logging configuration is set in the configuration file and other logging configuration options are ignored (for example, log-date-format).

Table 1: Deprecated Variations

Group	Name
DEFAULT	log-config
DEFAULT	log_config

log_date_format

Type

string

Default

%Y-%m-%d %H:%M:%S

Defines the format string for %(asctime)s in log records. Default: the value above . This option is ignored if log_config_append is set.

log_file

Type

string

Default

<None>

(Optional) Name of log file to send logging output to. If no default is set, logging will go to stderr as defined by use_stderr. This option is ignored if log_config_append is set.

Table 2: Deprecated Variations

Group	Name
DEFAULT	logfile

log_dir

Type
string

Default
<None>

(Optional) The base directory used for relative log_file paths. This option is ignored if log_config_append is set.

Table 3: Deprecated Variations

Group	Name
DEFAULT	logdir

watch_log_file

Type
boolean

Default
False

Uses logging handler designed to watch file system. When log file is moved or removed this handler will open a new log file with specified path instantaneously. It makes sense only if log_file option is specified and Linux platform is used. This option is ignored if log_config_append is set.

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

This function is known to have been broken for long time, and depends on the unmaintained library

use_syslog

Type
boolean

Default
False

Use syslog for logging. Existing syslog format is DEPRECATED and will be changed later to honor RFC5424. This option is ignored if log_config_append is set.

use_journal

Type
boolean

Default
False

Enable journald for logging. If running in a systemd environment you may wish to enable journal support. Doing so will use the journal native protocol which includes structured metadata in addition to log messages. This option is ignored if log_config_append is set.

syslog_log_facility

Type

string

Default

LOG_USER

Syslog facility to receive log lines. This option is ignored if log_config_append is set.

use_json

Type

boolean

Default

False

Use JSON formatting for logging. This option is ignored if log_config_append is set.

use_stderr

Type

boolean

Default

False

Log output to standard error. This option is ignored if log_config_append is set.

use_eventlog

Type

boolean

Default

False

Log output to Windows Event Log.

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Windows support is no longer maintained.

log_color

Type

boolean

Default

False

(Optional) Set the color key according to log levels. This option takes effect only when logging to stderr or stdout is used. This option is ignored if log_config_append is set.

log_rotate_interval**Type**

integer

Default

1

The amount of time before the log files are rotated. This option is ignored unless log_rotation_type is set to interval.

log_rotate_interval_type**Type**

string

Default

days

Valid Values

Seconds, Minutes, Hours, Days, Weekday, Midnight

Rotation interval type. The time of the last file change (or the time when the service was started) is used when scheduling the next rotation.

max_logfile_count**Type**

integer

Default

30

Maximum number of rotated log files.

max_logfile_size_mb**Type**

integer

Default

200

Log file maximum size in MB. This option is ignored if log_rotation_type is not set to size.

log_rotation_type**Type**

string

Default

none

Valid Values

interval, size, none

Log rotation type.

Possible values

interval

Rotate logs at predefined time intervals.

size

Rotate logs once they reach a predefined size.

none

Do not rotate log files.

logging_context_format_string

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s  
[%(global_request_id)s %(request_id)s %(user_identity)s]  
%(instance)s%(message)s
```

Format string to use for log messages with context. Used by oslo_log.formatters.ContextFormatter

logging_default_format_string

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d %(levelname)s %(name)s [-]  
%(instance)s%(message)s
```

Format string to use for log messages when context is undefined. Used by oslo_log.formatters.ContextFormatter

logging_debug_format_suffix

Type

string

Default

```
%(funcName)s %(pathname)s:%(lineno)d
```

Additional data to append to log message when logging level for the message is DEBUG. Used by oslo_log.formatters.ContextFormatter

logging_exception_prefix

Type

string

Default

```
%(asctime)s.%(msecs)03d %(process)d ERROR %(name)s  
%(instance)s
```

Prefix each line of exception output with this format. Used by oslo_log.formatters.ContextFormatter

logging_user_identity_format**Type**

string

Default

```
%{user)s %{project)s %{domain)s %{system_scope)s  
%{user_domain)s %{project_domain)s
```

Defines the format string for %{user_identity)s that is used in logging_context_format_string.
Used by oslo_log.formatters.ContextFormatter

default_log_levels**Type**

list

Default

```
['sqlalchemy=WARNING', 'iso8601=WARNING',  
'requests=WARNING', 'urllib3.connectionpool=WARNING',  
'keystonemiddleware=WARNING', 'keystoneauth=WARNING',  
'ironicclient=WARNING', 'amqp=WARNING', 'amqplib=WARNING',  
'stevedore=WARNING', 'oslo.messaging=WARNING',  
'oslo.messaging=WARNING']
```

List of package logging levels in logger=LEVEL pairs. This option is ignored if log_config_append is set.

publish_errors**Type**

boolean

Default

False

Enables or disables publication of error events.

instance_format**Type**

string

Default

```
"[instance: %(uuid)s] "
```

The format for an instance that is passed with the log message.

instance_uuid_format**Type**

string

Default

```
"[instance: %(uuid)s] "
```

The format for an instance UUID that is passed with the log message.

rate_limit_interval

Type

integer

Default

0

Interval, number of seconds, of log rate limiting.

rate_limit_burst

Type

integer

Default

0

Maximum number of logged messages per rate_limit_interval.

rate_limit_except_level

Type

string

Default

CRITICAL

Valid Values

CRITICAL, ERROR, INFO, WARNING, DEBUG,

Log level name used by rate limiting. Logs with level greater or equal to rate_limit_except_level are not filtered. An empty string means that all levels are filtered.

fatal_deprecations

Type

boolean

Default

False

Enables or disables fatal status of deprecations.

listen_address

Type

string

Default

::

IP to listen on.

listen_port

Type

port number

Default

5050

Minimum Value

0

Maximum Value

65535

Port to listen on.

listen_unix_socket**Type**

string

Default

<None>

Unix socket to listen on. Disables listen_address and listen_port.

listen_unix_socket_mode**Type**

unknown type

Default

<None>

File mode (an octal number) of the unix socket to listen on. Ignored if listen_unix_socket is not set.

host**Type**

string

Default

localhost

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Name of this node. This can be an opaque identifier. It is not necessarily a hostname, FQDN, or IP address. However, the node name must be valid within an AMQP key, and if using ZeroMQ, a valid hostname, FQDN, or IP address.

auth_strategy**Type**

string

Default

keystone

Valid Values

noauth, keystone, http_basic

Authentication method used on the ironic-inspector API. noauth, keystone or http_basic are valid options. noauth will disable all authentication.

Possible values

noauth

no authentication

keystone

use the Identity service for authentication

http_basic

HTTP basic authentication

http_basic_auth_user_file

Type

string

Default

/etc/ironic-inspector/htpasswd

Path to Apache format user authentication file used when auth_strategy=http_basic

timeout

Type

integer

Default

3600

Maximum Value

315576000

Timeout after which introspection is considered failed, set to 0 to disable.

clean_up_period

Type

integer

Default

60

Minimum Value

0

Amount of time in seconds, after which repeat clean up of timed out nodes and old nodes status information. WARNING: If set to a value of 0, then the periodic task is disabled and inspector will not sync with ironic to complete the internal clean-up process. Not advisable if the deployment uses a PXE filter, and will result in the ironic-inspector ceasing periodic cleanup activities.

leader_election_interval

Type

integer

Default

10

Interval (in seconds) between leader elections.

use_ssl**Type**

boolean

Default

False

SSL Enabled/Disabled

max_concurrency**Type**

integer

Default

1000

Minimum Value

2

The green thread pool size.

introspection_delay**Type**

integer

Default

5

Delay (in seconds) between two introspections. Only applies when boot is managed by ironic-inspector (i.e. manage_boot==True).

ipmi_address_fields**Type**

list

Default['redfish_address', 'ilo_address', 'drac_host',
 'drac_address', 'ibmc_address']

Ironic driver_info fields that are equivalent to ipmi_address.

rootwrap_config**Type**

string

Default

/etc/ironic-inspector/rootwrap.conf

Path to the rootwrap configuration file to use for running commands as root

api_max_limit**Type**

integer

Default

1000

Minimum Value

1

Limit the number of elements an API list-call returns

can_manage_boot

Type

boolean

Default

True

Whether the current installation of ironic-inspector can manage PXE booting of nodes. If set to False, the API will reject introspection requests with manage_boot missing or set to True.

enable_mdns

Type

boolean

Default

False

Whether to enable publishing the ironic-inspector API endpoint via multicast DNS.

standalone

Type

boolean

Default

True

Whether to run ironic-inspector as a standalone service. Its EXPERIMENTAL to set to False.

backdoor_port

Type

string

Default

<None>

Enable eventlet backdoor. Acceptable values are 0, <port>, and <start>:<end>, where 0 results in listening on a random tcp port number; <port> results in listening on the specified port number (and not enabling backdoor if that port is in use); and <start>:<end> results in listening on the smallest unused port number within the specified range of port numbers. The chosen port is displayed in the services log file.

backdoor_socket

Type

string

Default

<None>

Enable eventlet backdoor, using the provided path as a unix socket that can receive connections. This option is mutually exclusive with backdoor_port in that only one should be provided. If both

are provided then the existence of this option overrides the usage of that option. Inside the path {pid} will be replaced with the PID of the current process.

log_options**Type**

boolean

Default

True

Enables or disables logging values of all registered options when starting a service (at DEBUG level).

graceful_shutdown_timeout**Type**

integer

Default

60

Specify a timeout after which a gracefully shutdown server will exit. Zero value means endless wait.

api_paste_config**Type**

string

Default

api-paste.ini

File name for the paste.deploy config for api service

wsgi_log_format**Type**

string

Default

`%(client_ip)s %(request_line)s status: %(status_code)s len: %(body_length)s time: %(wall_seconds).7f`

A python format string that is used as the template to generate log lines. The following values can beformatted into it: client_ip, date_time, request_line, status_code, body_length, wall_seconds.

tcp_keepidle**Type**

integer

Default

600

Sets the value of TCP_KEEPIDLE in seconds for each server socket. Not supported on OS X.

wsgi_default_pool_size**Type**

integer

Default

100

Size of the pool of greenthreads used by wsgi

max_header_line

Type

integer

Default

16384

Maximum line size of message headers to be accepted. max_header_line may need to be increased when using large tokens (typically those generated when keystone is configured to use PKI tokens with big service catalogs).

wsgi_keep_alive

Type

boolean

Default

True

If False, closes the client socket connection explicitly.

client_socket_timeout

Type

integer

Default

900

Timeout for client connections socket operations. If an incoming connection is idle for this number of seconds it will be closed. A value of 0 means wait forever.

wsgi_server_debug

Type

boolean

Default

False

True if the server should send exception tracebacks to the clients on 500 errors. If False, the server will respond with empty bodies.

rpc_conn_pool_size

Type

integer

Default

30

Minimum Value

1

Size of RPC connection pool.

Table 4: Deprecated Variations

Group	Name
DEFAULT	rpc_conn_pool_size

conn_pool_min_size

Type
integer

Default
2

The pool size limit for connections expiration policy

conn_pool_ttl

Type
integer

Default
1200

The time-to-live in sec of idle connections in the pool

executor_thread_pool_size

Type
integer

Default
64

Size of executor thread pool when executor is threading or eventlet.

Table 5: Deprecated Variations

Group	Name
DEFAULT	rpc_thread_pool_size

rpc_response_timeout

Type
integer

Default
60

Seconds to wait for a response from a call.

transport_url

Type
string

Default

rabbit://

The network address and optional user credentials for connecting to the messaging backend, in URL format. The expected format is:

driver://[user:pass@]host:port[,[userN:passN@]hostN:portN]/virtual_host?query

Example: rabbit://rabbitmq:password@127.0.0.1:5672//

For full details on the fields in the URL see the documentation of oslo.messaging.TransportURL at <https://docs.openstack.org/oslo.messaging/latest/reference/transport.html>

control_exchange**Type**

string

Default

openstack

The default exchange under which topics are scoped. May be overridden by an exchange name specified in the transport_url option.

rpc_ping_enabled**Type**

boolean

Default

False

Add an endpoint to answer to ping calls. Endpoint is named oslo_rpc_server_ping

capabilities**boot_mode****Type**

boolean

Default

False

Whether to store the boot mode (BIOS or UEFI).

cpu_flags**Type**

dict

Default

```
{'vmx': 'cpu_vt', 'svm': 'cpu_vt', 'aes': 'cpu_aes', 'pse': 'cpu_hugepages', 'pdpe1gb': 'cpu_hugepages_1g', 'smx': 'cpu_txt'}
```

Mapping between a CPU flag and a capability to set if this flag is present.

coordination**backend_url****Type**

string

Default

memcached://localhost:11211

The backend URL to use for distributed coordination. EXPERIMENTAL.

cors**allowed_origin****Type**

list

Default

<None>

Indicate whether this resource may be shared with the domain received in the requests origin header. Format: <protocol>://<host>[:<port>], no trailing slash. Example: <https://horizon.example.com>

allow_credentials**Type**

boolean

Default

True

Indicate that the actual request can include user credentials

expose_headers**Type**

list

Default

[]

Indicate which headers are safe to expose to the API. Defaults to HTTP Simple Headers.

max_age**Type**

integer

Default

3600

Maximum cache age of CORS preflight requests.

allow_methods**Type**

list

Default

```
['GET', 'POST', 'PUT', 'HEAD', 'PATCH', 'DELETE', 'OPTIONS']
```

Indicate which methods can be used during the actual request.

allow_headers

Type

list

Default

```
['X-Auth-Token', 'X-OpenStack-Ironic-Inspector-API-Minimum-Version',
 'X-OpenStack-Ironic-Inspector-API-Maximum-Version',
 'X-OpenStack-Ironic-Inspector-API-Version']
```

Indicate which header field names may be used during the actual request.

database

sqlite_synchronous

Type

boolean

Default

True

If True, SQLite uses synchronous mode.

backend

Type

string

Default

sqlalchemy

The back end to use for the database.

connection

Type

string

Default

<None>

The SQLAlchemy connection string to use to connect to the database.

slave_connection

Type

string

Default

<None>

The SQLAlchemy connection string to use to connect to the slave database.

mysql_sql_mode**Type**

string

Default

TRADITIONAL

The SQL mode to be used for MySQL sessions. This option, including the default, overrides any server-set SQL mode. To use whatever SQL mode is set by the server configuration, set this to no value. Example: mysql_sql_mode=

mysql_wsrep_sync_wait**Type**

integer

Default

<None>

For Galera only, configure wsrep_sync_wait causality checks on new connections. Default is None, meaning dont configure any setting.

connection_recycle_time**Type**

integer

Default

3600

Connections which have been present in the connection pool longer than this number of seconds will be replaced with a new one the next time they are checked out from the pool.

max_pool_size**Type**

integer

Default

5

Maximum number of SQL connections to keep open in a pool. Setting a value of 0 indicates no limit.

max_retries**Type**

integer

Default

10

Maximum number of database connection retries during startup. Set to -1 to specify an infinite retry count.

retry_interval**Type**

integer

Default

10

Interval between retries of opening a SQL connection.

max_overflow

Type

integer

Default

50

If set, use this value for max_overflow with SQLAlchemy.

connection_debug

Type

integer

Default

0

Minimum Value

0

Maximum Value

100

Verbosity of SQL debugging information: 0=None, 100=Everything.

connection_trace

Type

boolean

Default

False

Add Python stack traces to SQL as comment strings.

pool_timeout

Type

integer

Default

<None>

If set, use this value for pool_timeout with SQLAlchemy.

use_db_reconnect

Type

boolean

Default

False

Enable the experimental use of database reconnect on connection lost.

db_retry_interval

Type
integer

Default
1

Seconds between retries of a database transaction.

db_inc_retry_interval

Type
boolean

Default
True

If True, increases the interval between retries of a database operation up to db_max_retry_interval.

db_max_retry_interval

Type
integer

Default
10

If db_inc_retry_interval is set, the maximum seconds between retries of a database operation.

db_max_retries

Type
integer

Default
20

Maximum retries in case of connection error or deadlock error before error is raised. Set to -1 to specify an infinite retry count.

connection_parameters

Type
string

Default
''

Optional URL parameters to append onto the connection URL at connect time; specify as param1=value1¶m2=value2&

discovery

enroll_node_driver

Type
string

Default
fake-hardware

The name of the Ironic driver used by the enroll hook when creating a new node in Ironic.

enroll_node_fields

Type

dict

Default

{}

Additional fields to set on newly discovered nodes.

enabled_bmc_address_version

Type

list

Default

['4', '6']

IP version of BMC address that will be used when enrolling a new node in Ironic. Defaults to 4,6. Could be 4 (use v4 address only), 4,6 (v4 address have higher priority and if both addresses found v6 version is ignored), 6,4 (v6 is desired but fall back to v4 address for BMCs having v4 address, opposite to 4,6), 6 (use v6 address only and ignore v4 version).

dnsmasq_pxe_filter

dhcp_hostsdir

Type

string

Default

/var/lib/ironic-inspector/dhcp-hostsdir

The MAC address cache directory, exposed to dnsmasq. This directory is expected to be in exclusive control of the driver.

purge_dhcp_hostsdir

Type

boolean

Default

True

Purge the hostsdir upon driver initialization. Setting to false should only be performed when the deployment of inspector is such that there are multiple processes executing inside of the same host and namespace. In this case, the Operator is responsible for setting up a custom cleaning facility.

dnsmasq_start_command

Type

string

Default

' '

A (shell) command line to start the dnsmasq service upon filter initialization. Default: dont start.

dnsmasq_stop_command**Type**

string

Default

''

A (shell) command line to stop the dnsmasq service upon inspector (error) exit. Default: dont stop.

extra_hardware**strict****Type**

boolean

Default

False

If True, refuse to parse extra data if at least one record is too short. Additionally, remove the incoming data even if parsing failed.

healthcheck**path****Type**

string

Default

/healthcheck

The path to respond to healthcheck requests on.

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

detailed**Type**

boolean

Default

False

Show more detailed information as part of the response. Security note: Enabling this option may expose sensitive details about the service being monitored. Be sure to verify that it will not violate your security policies.

backends**Type**

list

Default

[]

Additional backends that can perform health checks and report that information back as part of a request.

`allowed_source_ranges`

Type

list

Default

[]

A list of network addresses to limit source ip allowed to access healthcheck information. Any request from ip outside of these network addresses are ignored.

`ignore_proxied_requests`

Type

boolean

Default

False

Ignore requests with proxy headers.

`disable_by_file_path`

Type

string

Default

<None>

Check the presence of a file to determine if an application is running on a port. Used by DisableByFileHealthcheck plugin.

`disable_by_file_paths`

Type

list

Default

[]

Check the presence of a file based on a port to determine if an application is running on a port. Expects a port:path list of strings. Used by DisableByFilesPortsHealthcheck plugin.

`enable_by_file_paths`

Type

list

Default

[]

Check the presence of files. Used by EnableByFilesHealthcheck plugin.

`enabled`

Type

boolean

Default

False

Enable the health check endpoint at /healthcheck. Note that this is unauthenticated. More information is available at https://docs.openstack.org/oslo.middleware/latest/reference/healthcheck_plugins.html.

iptables**dnsmasq_interface****Type**

string

Default

br-ctlplane

Interface on which dnsmasq listens, the default is for VMs.

firewall_chain**Type**

string

Default

ironic-inspector

iptables chain name to use.

ethoib_interfaces**Type**

list

Default

[]

List of Ethernet Over InfiniBand interfaces on the Inspector host which are used for physical access to the DHCP network. Multiple interfaces would be attached to a bond or bridge specified in dnsmasq_interface. The MACs of the InfiniBand nodes which are not in desired state are going to be blocked based on the list of neighbor MACs on these interfaces.

ip_version**Type**

string

Default

4

Valid Values

4, 6

The IP version that will be used for iptables filter. Defaults to 4.

Possible values

4

IPv4

6

IPv6

ironic

auth_url

Type

unknown type

Default

<None>

Authentication URL

auth_type

Type

unknown type

Default

<None>

Authentication type to load

Table 6: Deprecated Variations

Group	Name
ironic	auth_plugin

cafile

Type

string

Default

<None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type

string

Default

<None>

PEM encoded client certificate cert file

collect_timing

Type

boolean

Default

False

Collect per-API call timing information.

connect_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

default_domain_id

Type

unknown type

Default

<None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name

Type

unknown type

Default

<None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

domain_id

Type

unknown type

Default

<None>

Domain ID to scope to

domain_name

Type

unknown type

Default

<None>

Domain name to scope to

endpoint_override

Type

string

Default

<None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type

boolean

Default

False

Verify HTTPS connections.

keyfile

Type

string

Default

<None>

PEM encoded client certificate key file

max_version

Type

string

Default

<None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

max_retries

Type

integer

Default

30

Maximum number of retries in case of conflict error (HTTP 409).

min_version

Type

string

Default

<None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password**Type**

unknown type

Default

<None>

Users password

project_domain_id**Type**

unknown type

Default

<None>

Domain ID containing project

project_domain_name**Type**

unknown type

Default

<None>

Domain name containing project

project_id**Type**

unknown type

Default

<None>

Project ID to scope to

Table 7: Deprecated Variations

Group	Name
ironic	tenant-id
ironic	tenant_id

project_name**Type**

unknown type

Default

<None>

Project name to scope to

Table 8: Deprecated Variations

Group	Name
ironic	tenant-name
ironic	tenant_name

region_name

Type

string

Default

<None>

The default region_name for endpoint URL discovery.

retriable_status_codes

Type

list

Default

<None>

List of retriable HTTP status codes that should be retried. If not set default to [503]

retry_interval

Type

integer

Default

2

Interval between retries in case of conflict error (HTTP 409).

service_name

Type

string

Default

<None>

The default service_name for endpoint URL discovery.

service_type

Type

string

Default

baremetal

The default service_type for endpoint URL discovery.

split_loggers

Type

boolean

Default

False

Log requests to multiple loggers.

status_code_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type

unknown type

Default

<None>

Scope for system operations

tenant_id

Type

unknown type

Default

<None>

Tenant ID

tenant_name

Type

unknown type

Default

<None>

Tenant Name

timeout

Type

integer

Default

<None>

Timeout value for http requests

trust_id

Type

unknown type

Default

<None>

ID of the trust to use as a trustee use

user_domain_id

Type

unknown type

Default

<None>

Users domain id

user_domain_name

Type

unknown type

Default

<None>

Users domain name

user_id

Type

unknown type

Default

<None>

User id

username

Type

unknown type

Default

<None>

Username

Table 9: Deprecated Variations

Group	Name
ironic	user-name
ironic	user_name

valid_interfaces**Type**

list

Default

['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version**Type**

string

Default

<None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

keystone_auth_token**www_authenticate_uri****Type**

string

Default

<None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint.

Table 10: Deprecated Variations

Group	Name
keystone_auth_token	auth_uri

auth_uri**Type**

string

Default

<None>

Complete public Identity API endpoint. This endpoint should not be an admin endpoint, as it should be accessible by all end users. Unauthenticated clients are redirected to this endpoint to authenticate. Although this endpoint should ideally be unversioned, client support in the wild varies. If you're using a versioned v2 endpoint here, then this should *not* be the same endpoint the service user utilizes for validating tokens, because normal end users may not be able to reach that endpoint. This option is deprecated in favor of `www_authenticate_uri` and will be removed in the S release.

Warning

This option is deprecated for removal since Queens. Its value may be silently ignored in the future.

Reason

The `auth_uri` option is deprecated in favor of `www_authenticate_uri` and will be removed in the S release.

`auth_version`

Type

string

Default

`<None>`

API version of the Identity API endpoint.

`interface`

Type

string

Default

`internal`

Interface to use for the Identity API endpoint. Valid values are `public`, `internal` (default) or `admin`.

`delay_auth_decision`

Type

boolean

Default

`False`

Do not handle authorization requests within the middleware, but delegate the authorization decision to downstream WSGI components.

`http_connect_timeout`

Type

integer

Default

`<None>`

Request timeout value for communicating with Identity API server.

http_request_max_retries

Type

integer

Default

3

How many times are we trying to reconnect when communicating with Identity API Server.

cache

Type

string

Default

<None>

Request environment key where the Swift cache object is stored. When auth_token middleware is deployed with a Swift cache, use this option to have the middleware share a caching backend with swift. Otherwise, use the memcached_servers option instead.

certfile

Type

string

Default

<None>

Required if identity server requires client certificate

keyfile

Type

string

Default

<None>

Required if identity server requires client certificate

cafie

Type

string

Default

<None>

A PEM encoded Certificate Authority to use when verifying HTTPS connections. Defaults to system CAs.

insecure

Type

boolean

Default

False

Verify HTTPS connections.

region_name

Type

string

Default

<None>

The region in which the identity server can be found.

memcached_servers

Type

list

Default

<None>

Optionally specify a list of memcached server(s) to use for caching. If left undefined, tokens will instead be cached in-process.

Table 11: Deprecated Variations

Group	Name
keystone_auth_token	memcache_servers

token_cache_time

Type

integer

Default

300

In order to prevent excessive effort spent validating tokens, the middleware caches previously-seen tokens for a configurable duration (in seconds). Set to -1 to disable caching completely.

memcache_security_strategy

Type

string

Default

None

Valid Values

None, MAC, ENCRYPT

(Optional) If defined, indicate whether token data should be authenticated or authenticated and encrypted. If MAC, token data is authenticated (with HMAC) in the cache. If ENCRYPT, token data is encrypted and authenticated in the cache. If the value is not one of these options or empty, auth_token will raise an exception on initialization.

memcache_secret_key

Type

string

Default

<None>

(Optional, mandatory if memcache_security_strategy is defined) This string is used for key derivation.

memcache_pool_dead_retry

Type

integer

Default

300

(Optional) Number of seconds memcached server is considered dead before it is tried again.

memcache_pool_maxsize

Type

integer

Default

10

(Optional) Maximum total number of open connections to every memcached server.

memcache_pool_socket_timeout

Type

integer

Default

3

(Optional) Socket timeout in seconds for communicating with a memcached server.

memcache_pool_unused_timeout

Type

integer

Default

60

(Optional) Number of seconds a connection to memcached is held unused in the pool before it is closed.

memcache_pool_conn_get_timeout

Type

integer

Default

10

(Optional) Number of seconds that an operation will wait to get a memcached client connection from the pool.

memcache_use_advanced_pool

Type

boolean

Default

True

(Optional) Use the advanced (eventlet safe) memcached client pool.

include_service_catalog

Type

boolean

Default

True

(Optional) Indicate whether to set the X-Service-Catalog header. If False, middleware will not ask for service catalog on token validation and will not set the X-Service-Catalog header.

enforce_token_bind

Type

string

Default

permissive

Used to control the use and type of token binding. Can be set to: disabled to not check token binding. permissive (default) to validate binding information if the bind type is of a form known to the server and ignore it if not. strict like permissive but if the bind type is unknown the token will be rejected. required any form of token binding is needed to be allowed. Finally the name of a binding method that must be present in tokens.

service_token_roles

Type

list

Default

['service']

A choice of roles that must be present in a service token. Service tokens are allowed to request that an expired token can be used and so this check should tightly control that only actual services should be sending this token. Roles here are applied as an ANY check so any role in this list must be present. For backwards compatibility reasons this currently only affects the allow_expired check.

service_token_roles_required

Type

boolean

Default

False

For backwards compatibility reasons we must let valid service tokens pass that dont pass the service_token_roles check as valid. Setting this true will become the default in a future release and should be enabled if possible.

service_type

Type

string

Default

<None>

The name or type of the service as it appears in the service catalog. This is used to validate tokens that have restricted access rules.

auth_type**Type**

unknown type

Default

<None>

Authentication type to load

Table 12: Deprecated Variations

Group	Name
keystone_auth_token	auth_plugin

auth_section**Type**

unknown type

Default

<None>

Config Section from which to load plugin specific options

mdns**registration_attempts****Type**

integer

Default

5

Minimum Value

1

Number of attempts to register a service. Currently has to be larger than 1 because of race conditions in the zeroconf library.

lookup_attempts**Type**

integer

Default

3

Minimum Value

1

Number of attempts to lookup a service.

params

Type

unknown type

Default

{}

Additional parameters to pass for the registered service.

interfaces

Type

list

Default

<None>

List of IP addresses of interfaces to use for mDNS. Defaults to all interfaces on the system.

oslo.messaging.kafka

kafka_max_fetch_bytes

Type

integer

Default

1048576

Max fetch bytes of Kafka consumer

kafka_consumer_timeout

Type

floating point

Default

1.0

Default timeout(s) for Kafka consumers

pool_size

Type

integer

Default

10

Pool Size for Kafka Consumers

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Driver no longer uses connection pool.

conn_pool_min_size**Type**

integer

Default

2

The pool size limit for connections expiration policy

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Driver no longer uses connection pool.

conn_pool_ttl**Type**

integer

Default

1200

The time-to-live in sec of idle connections in the pool

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Driver no longer uses connection pool.

consumer_group**Type**

string

Default

oslo.messaging.consumer

Group id for Kafka consumer. Consumers in one group will coordinate message consumption

producer_batch_timeout**Type**

floating point

Default

0.0

Upper bound on the delay for KafkaProducer batching in seconds

producer_batch_size

Type
integer

Default
16384

Size of batch for the producer async send

compression_codec

Type
string

Default
none

Valid Values
none, gzip, snappy, lz4, zstd

The compression codec for all data generated by the producer. If not set, compression will not be used. Note that the allowed values of this depend on the kafka version

enable_auto_commit

Type
boolean

Default
False

Enable asynchronous consumer commits

max_poll_records

Type
integer

Default
500

The maximum number of records returned in a poll call

security_protocol

Type
string

Default
PLAINTEXT

Valid Values
PLAINTEXT, SASL_PLAINTEXT, SSL, SASL_SSL

Protocol used to communicate with brokers

sasl_mechanism

Type
string

Default
PLAIN

Mechanism when security protocol is SASL

ssl_cafile**Type**

string

Default

''

CA certificate PEM file used to verify the server certificate

ssl_client_cert_file**Type**

string

Default

''

Client certificate PEM file used for authentication.

ssl_client_key_file**Type**

string

Default

''

Client key PEM file used for authentication.

ssl_client_key_password**Type**

string

Default

''

Client key password file used for authentication.

oslo.messaging_notifications**driver****Type**

multi-valued

Default

''

The Drivers(s) to handle sending notifications. Possible values are messaging, messagingv2, routing, log, test, noop

Table 13: Deprecated Variations

Group	Name
DEFAULT	notification_driver

transport_url

Type

string

Default

<None>

A URL representing the messaging driver to use for notifications. If not set, we fall back to the same configuration used for RPC.

Table 14: Deprecated Variations

Group	Name
DEFAULT	notification_transport_url

topics

Type

list

Default

['notifications']

AMQP topic used for OpenStack notifications.

Table 15: Deprecated Variations

Group	Name
rpc_notifier2	topics
DEFAULT	notification_topics

retry

Type

integer

Default

-1

The maximum number of attempts to re-send a notification message which failed to be delivered due to a recoverable error. 0 - No retry, -1 - indefinite

oslo.messaging.rabbit

amqp_durable_queues

Type

boolean

Default

False

Use durable queues in AMQP. If rabbit_quorum_queue is enabled, queues will be durable and this value will be ignored.

amqp_auto_delete**Type**

boolean

Default

False

Auto-delete queues in AMQP.

Table 16: Deprecated Variations

Group	Name
DEFAULT	amqp_auto_delete

ssl**Type**

boolean

Default

False

Connect over SSL.

Table 17: Deprecated Variations

Group	Name
oslo.messaging_rabbit	rabbit_use_ssl

ssl_version**Type**

string

Default

''

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

Table 18: Deprecated Variations

Group	Name
oslo.messaging_rabbit	kombu_ssl_version

ssl_key_file**Type**

string

Default

''

SSL key file (valid only if SSL enabled).

Table 19: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_keyfile

ssl_cert_file

Type
string

Default
''

SSL cert file (valid only if SSL enabled).

Table 20: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_certfile

ssl_ca_file

Type
string

Default
''

SSL certification authority file (valid only if SSL enabled).

Table 21: Deprecated Variations

Group	Name
oslo.messaging.rabbit	kombu_ssl_ca_certs

ssl_enforce_fips_mode

Type
boolean

Default
False

Global toggle for enforcing the OpenSSL FIPS mode. This feature requires Python support. This is available in Python 3.9 in all environments and may have been backported to older Python versions on select environments. If the Python executable used does not support OpenSSL FIPS mode, an exception will be raised.

heartbeat_in_pthread

Type
boolean

Default

False

(DEPRECATED) It is recommend not to use this option anymore. Run the health check heartbeat thread through a native python thread by default. If this option is equal to False then the health check heartbeat will inherit the execution model from the parent process. For example if the parent process has monkey patched the stdlib by using eventlet/greenlet then the heartbeat will be run through a green thread. This option should be set to True only for the wsgi services.

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

The option is related to Eventlet which will be removed. In addition this has never worked as expected with services using eventlet for core service framework.

kombu_reconnect_delay**Type**

floating point

Default

1.0

Minimum Value

0.0

Maximum Value

4.5

How long to wait (in seconds) before reconnecting in response to an AMQP consumer cancel notification.

Table 22: Deprecated Variations

Group	Name
DEFAULT	kombu_reconnect_delay

kombu_compression**Type**

string

Default

<None>

EXPERIMENTAL: Possible values are: gzip, bz2. If not set compression will not be used. This option may not be available in future versions.

kombu_missing_consumer_retry_timeout**Type**

integer

Default

60

How long to wait a missing client before abandoning to send it its replies. This value should not be longer than `rpc_response_timeout`.

Table 23: Deprecated Variations

Group	Name
<code>oslo.messaging_rabbit</code>	<code>kombu_reconnect_timeout</code>

`kombu_failover_strategy`**Type**

string

Default

round-robin

Valid Values

round-robin, shuffle

Determines how the next RabbitMQ node is chosen in case the one we are currently connected to becomes unavailable. Takes effect only if more than one RabbitMQ node is provided in config.

`rabbit_login_method`**Type**

string

Default

AMQPLAIN

Valid Values

PLAIN, AMQPLAIN, EXTERNAL, RABBIT-CR-DEMO

The RabbitMQ login method.

Table 24: Deprecated Variations

Group	Name
DEFAULT	<code>rabbit_login_method</code>

`rabbit_retry_interval`**Type**

integer

Default

1

How frequently to retry connecting with RabbitMQ.

`rabbit_retry_backoff`**Type**

integer

Default

2

How long to backoff for between retries when connecting to RabbitMQ.

Table 25: Deprecated Variations

Group	Name
DEFAULT	rabbit_retry_backoff

rabbit_interval_max**Type**

integer

Default

30

Maximum interval of RabbitMQ connection retries. Default is 30 seconds.

rabbit_ha_queues**Type**

boolean

Default

False

Try to use HA queues in RabbitMQ (x-ha-policy: all). If you change this option, you must wipe the RabbitMQ database. In RabbitMQ 3.0, queue mirroring is no longer controlled by the x-ha-policy argument when declaring a queue. If you just want to make sure that all queues (except those with auto-generated names) are mirrored across all nodes, run: rabbitmqctl set_policy HA ^(?!amq).* {ha-mode: all}

Table 26: Deprecated Variations

Group	Name
DEFAULT	rabbit_ha_queues

rabbit_quorum_queue**Type**

boolean

Default

False

Use quorum queues in RabbitMQ (x-queue-type: quorum). The quorum queue is a modern queue type for RabbitMQ implementing a durable, replicated FIFO queue based on the Raft consensus algorithm. It is available as of RabbitMQ 3.8.0. If set this option will conflict with the HA queues (**rabbit_ha_queues**) aka mirrored queues, in other words the HA queues should be disabled. Quorum queues are also durable by default so the amqp_durable_queues option is ignored when this option is enabled.

rabbit_transient_quorum_queue

Type

boolean

Default

False

Use quorum queues for transients queues in RabbitMQ. Enabling this option will then make sure those queues are also using quorum kind of rabbit queues, which are HA by default.

rabbit_quorum_delivery_limit

Type

integer

Default

0

Each time a message is redelivered to a consumer, a counter is incremented. Once the redelivery count exceeds the delivery limit the message gets dropped or dead-lettered (if a DLX exchange has been configured) Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

rabbit_quorum_max_memory_length

Type

integer

Default

0

By default all messages are maintained in memory if a quorum queue grows in length it can put memory pressure on a cluster. This option can limit the number of messages in the quorum queue. Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

Table 27: Deprecated Variations

Group	Name
oslo.messaging_rabbit	rabbit_quorum_max_memory_length

rabbit_quorum_max_memory_bytes

Type

integer

Default

0

By default all messages are maintained in memory if a quorum queue grows in length it can put memory pressure on a cluster. This option can limit the number of memory bytes used by the quorum queue. Used only when rabbit_quorum_queue is enabled, Default 0 which means dont set a limit.

Table 28: Deprecated Variations

Group	Name
oslo.messaging.rabbit	rabbit_quorum_max_memory_bytes

rabbit_transient_queues_ttl**Type**

integer

Default

1800

Minimum Value

0

Positive integer representing duration in seconds for queue TTL (x-expires). Queues which are unused for the duration of the TTL are automatically deleted. The parameter affects only reply and fanout queues. Setting 0 as value will disable the x-expires. If doing so, make sure you have a rabbitmq policy to delete the queues or your deployment will create an infinite number of queue over time. In case rabbit_stream_fanout is set to True, this option will control data retention policy (x-max-age) for messages in the fanout queue rather than the queue duration itself. So the oldest data in the stream queue will be discarded from it once reaching TTL. Setting to 0 will disable x-max-age for stream which makes stream grow indefinitely filling up the diskspace.

rabbit_qos_prefetch_count**Type**

integer

Default

0

Specifies the number of messages to prefetch. Setting to zero allows unlimited messages.

heartbeat_timeout_threshold**Type**

integer

Default

60

Number of seconds after which the Rabbit broker is considered down if heartbeats keep-alive fails (0 disables heartbeat).

heartbeat_rate**Type**

integer

Default

3

How often times during the heartbeat_timeout_threshold we check the heartbeat.

`direct_mandatory_flag`

Type

boolean

Default

True

(DEPRECATED) Enable/Disable the RabbitMQ mandatory flag for direct send. The direct send is used as reply, so the MessageUndeliverable exception is raised in case the client queue does not exist. MessageUndeliverable exception will be used to loop for a timeout to let a chance to sender to recover. This flag is deprecated and it will not be possible to deactivate this functionality anymore

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

Mandatory flag no longer deactivatable.

`enable_cancel_on_failover`

Type

boolean

Default

False

Enable x-cancel-on-ha-failover flag so that rabbitmq server will cancel and notify consumers when queue is down

`use_queue_manager`

Type

boolean

Default

False

Should we use consistent queue names or random ones

`hostname`

Type

string

Default

node1.example.com

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Hostname used by queue manager. Defaults to the value returned by socket.gethostname().

`processname`

Type

string

Default

nova-api

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Process name used by queue manager

rabbit_stream_fanout**Type**

boolean

Default

False

Use stream queues in RabbitMQ (x-queue-type: stream). Streams are a new persistent and replicated data structure (queue type) in RabbitMQ which models an append-only log with non-destructive consumer semantics. It is available as of RabbitMQ 3.9.0. If set this option will replace all fanout queues with only one stream queue.

oslo_policy**enforce_scope****Type**

boolean

Default

True

This option controls whether or not to enforce scope when evaluating policies. If True, the scope of the token used in the request is compared to the scope_types of the policy being enforced. If the scopes do not match, an InvalidScope exception will be raised. If False, a message will be logged informing operators that policies are being invoked with mismatching scope.

Warning

This option is deprecated for removal. Its value may be silently ignored in the future.

Reason

This configuration was added temporarily to facilitate a smooth transition to the new RBAC. OpenStack will always enforce scope checks. This configuration option is deprecated and will be removed in the 2025.2 cycle.

enforce_new_defaults**Type**

boolean

Default

True

This option controls whether or not to use old deprecated defaults when evaluating policies. If True, the old deprecated defaults are not going to be evaluated. This means if any existing token is allowed for old defaults but is disallowed for new defaults, it will be disallowed. It is encouraged to enable this flag along with the enforce_scope flag so that you can get the benefits of new defaults

and scope_type together. If False, the deprecated policy check string is logically ORed with the new policy check string, allowing for a graceful upgrade experience between releases with new policies, which is the default behavior.

policy_file

Type

string

Default

policy.yaml

The relative or absolute path of a file that maps roles to permissions for a given service. Relative paths must be specified in relation to the configuration file setting this option.

policy_default_rule

Type

string

Default

default

Default rule. Enforced when a requested rule is not found.

policy_dirs

Type

multi-valued

Default

policy.d

Directories where policy configuration files are stored. They can be relative to any directory in the search path defined by the config_dir option, or absolute paths. The file defined by policy_file must exist for these directories to be searched. Missing or empty directories are ignored.

remote_content_type

Type

string

Default

application/x-www-form-urlencoded

Valid Values

application/x-www-form-urlencoded, application/json

Content Type to send and receive data for REST based policy check

remote_ssl_verify_server_crt

Type

boolean

Default

False

server identity verification for REST based policy check

remote_ssl_ca_crt_file

Type

string

Default

<None>

Absolute path to ca cert file for REST based policy check

remote_ssl_client_crt_file

Type

string

Default

<None>

Absolute path to client cert for REST based policy check

remote_ssl_client_key_file

Type

string

Default

<None>

Absolute path client key file REST based policy check

remote_timeout

Type

floating point

Default

60

Minimum Value

0

Timeout in seconds for REST based policy check

pci_devices

alias

Type

multi-valued

Default

''

An alias for PCI device identified by vendor_id and product_id fields. Format: {vendor_id: 1234, product_id: 5678, name: pci_dev1}

port_physnet

cidr_map

Type

list

Default

10.10.10.0/24:physnet_a,2001:db8::/64:physnet_b

This option has a sample default set, which means that its actual default value may vary from the one documented above.

Mapping of IP subnet CIDR to physical network. When the physnet_cidr_map processing hook is enabled the physical_network property of baremetal ports is populated based on this mapping.

processing

add_ports

Type

string

Default

pxe

Valid Values

all, active, pxe, disabled

Which MAC addresses to add as ports during introspection. Possible values: all (all MAC addresses), active (MAC addresses of NIC with IP addresses), pxe (only MAC address of NIC node PXE booted from, falls back to active if PXE MAC is not supplied by the ramdisk).

keep_ports

Type

string

Default

all

Valid Values

all, present, added

Which ports (already present on a node) to keep after introspection. Possible values: all (do not delete anything), present (keep ports which MACs were present in introspection data), added (keep only MACs that we added during introspection).

overwrite_existing

Type

boolean

Default

True

Whether to overwrite existing values in node database. Disable this option to make introspection a non-destructive operation.

default_processing_hooks**Type**

string

Defaultramdisk_error,root_disk_selection,scheduler,
validate_interfaces,capabilities,pci_devices

Comma-separated list of default hooks for processing pipeline. Hook scheduler updates the node with the minimum properties required by the Nova scheduler. Hook validate_interfaces ensures that valid NIC data was provided by the ramdisk. Do not exclude these two unless you really know what you're doing.

processing_hooks**Type**

string

Default

\$default_processing_hooks

Comma-separated list of enabled hooks for processing pipeline. The default for this is \$default_processing_hooks, hooks can be added before or after the defaults like this: prehook,\$default_processing_hooks,posthook.

ramdisk_logs_dir**Type**

string

Default

<None>

If set, logs from ramdisk will be stored in this directory.

always_store_ramdisk_logs**Type**

boolean

Default

False

Whether to store ramdisk logs even if it did not return an error message (dependent upon ramdisk_logs_dir option being set).

node_not_found_hook**Type**

string

Default

<None>

The name of the hook to run when inspector receives inspection information from a node it isn't already aware of. This hook is ignored by default.

store_data

Type

string

Default

none

The storage backend for storing introspection data. Possible values are: none, database and swift. If set to none, introspection data will not be stored.

disk_partitioning_spacing

Type

boolean

Default

True

Whether to leave 1 GiB of disk size untouched for partitioning. Only has effect when used with the IPA as a ramdisk, for older ramdisk local_gb is calculated on the ramdisk side.

ramdisk_logs_filename_format

Type

string

Default

{uuid}_{dt:%Y%m%d-%H%M%S.%f}.tar.gz

File name template for storing ramdisk logs. The following replacements can be used: {uuid} - node UUID or unknown, {bmc} - node BMC address or unknown, {dt} - current UTC date and time, {mac} - PXE booting MAC or unknown.

power_off

Type

boolean

Default

True

Whether to power off a node after introspection. Nodes in active or rescue states which submit introspection data will be left on if the feature is enabled via the permit_active_introspection configuration option.

permit_active_introspection

Type

boolean

Default

False

Whether to process nodes that are in running states.

update_pxe_enabled

Type

boolean

Default

True

Whether to update the pxe_enabled value according to the introspection data. This option has no effect if [processing]overwrite_existing is set to False

pxe_filter

driver

Type

string

Default

iptables

PXE boot filter driver to use, possible filters are: iptables, dnsmasq and noop. Set noop to disable the firewall filtering.

sync_period

Type

integer

Default

15

Minimum Value

0

Amount of time in seconds, after which repeat periodic update of the filter.

deny_unknown_macs

Type

boolean

Default

False

By default inspector will open the DHCP server for any node when introspection is active. Opening DHCP for unknown MAC addresses when introspection is active allow for users to add nodes with no ports to ironic and have ironic-inspector enroll ports based on node introspection results. NOTE: If this option is True, nodes must have at least one enrolled port prior to introspection.

service_catalog

auth_url

Type

unknown type

Default

<None>

Authentication URL

auth_type

Type

unknown type

Default

<None>

Authentication type to load

Table 29: Deprecated Variations

Group	Name
service_catalog	auth_plugin

cafile

Type

string

Default

<None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile

Type

string

Default

<None>

PEM encoded client certificate cert file

collect_timing

Type

boolean

Default

False

Collect per-API call timing information.

connect_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

default_domain_id**Type**

unknown type

Default

<None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name**Type**

unknown type

Default

<None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

domain_id**Type**

unknown type

Default

<None>

Domain ID to scope to

domain_name**Type**

unknown type

Default

<None>

Domain name to scope to

endpoint_override**Type**

string

Default

<None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type
boolean

Default
False

Verify HTTPS connections.

keyfile

Type
string

Default
<None>

PEM encoded client certificate key file

max_version

Type
string

Default
<None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

min_version

Type
string

Default
<None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password

Type
unknown type

Default
<None>

Users password

project_domain_id

Type
unknown type

Default
<None>

Domain ID containing project

project_domain_name**Type**

unknown type

Default

<None>

Domain name containing project

project_id**Type**

unknown type

Default

<None>

Project ID to scope to

Table 30: Deprecated Variations

Group	Name
service_catalog	tenant-id
service_catalog	tenant_id

project_name**Type**

unknown type

Default

<None>

Project name to scope to

Table 31: Deprecated Variations

Group	Name
service_catalog	tenant-name
service_catalog	tenant_name

region_name**Type**

string

Default

<None>

The default region_name for endpoint URL discovery.

retriable_status_codes**Type**

list

Default

<None>

List of retriable HTTP status codes that should be retried. If not set default to [503]

service_name

Type

string

Default

<None>

The default service_name for endpoint URL discovery.

service_type

Type

string

Default

baremetal-introspection

The default service_type for endpoint URL discovery.

split_loggers

Type

boolean

Default

False

Log requests to multiple loggers.

status_code_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type

unknown type

Default

<None>

Scope for system operations

tenant_id

Type

unknown type

Default

<None>

Tenant ID

tenant_name

Type

unknown type

Default

<None>

Tenant Name

timeout

Type

integer

Default

<None>

Timeout value for http requests

trust_id

Type

unknown type

Default

<None>

ID of the trust to use as a trustee use

user_domain_id

Type

unknown type

Default

<None>

Users domain id

user_domain_name

Type

unknown type

Default

<None>

Users domain name

user_id

Type

unknown type

Default

<None>

User id

username

Type

unknown type

Default

<None>

Username

Table 32: Deprecated Variations

Group	Name
service_catalog	user-name
service_catalog	user_name

valid_interfaces

Type

list

Default

['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version

Type

string

Default

<None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

ssl

ca_file

Type

string

Default

<None>

CA certificate file to use to verify connecting clients.

Table 33: Deprecated Variations

Group	Name
DEFAULT	ssl_ca_file

cert_file

Type

string

Default

<None>

Certificate file to use when starting the server securely.

Table 34: Deprecated Variations

Group	Name
DEFAULT	ssl_cert_file

key_file

Type

string

Default

<None>

Private key file to use when starting the server securely.

Table 35: Deprecated Variations

Group	Name
DEFAULT	ssl_key_file

version

Type

string

Default

<None>

SSL version to use (valid only if SSL enabled). Valid values are TLSv1 and SSLv23. SSLv2, SSLv3, TLSv1_1, and TLSv1_2 may be available on some distributions.

ciphers

Type

string

Default

<None>

Sets the list of available ciphers. value should be a string in the OpenSSL cipher list format.

swift**auth_url****Type**

unknown type

Default

<None>

Authentication URL

auth_type**Type**

unknown type

Default

<None>

Authentication type to load

Table 36: Deprecated Variations

Group	Name
swift	auth_plugin

cafile**Type**

string

Default

<None>

PEM encoded Certificate Authority to use when verifying HTTPs connections.

certfile**Type**

string

Default

<None>

PEM encoded client certificate cert file

collect_timing**Type**

boolean

Default

False

Collect per-API call timing information.

connect_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for connection errors.

connect_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for connection errors. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

container

Type

string

Default

ironic-inspector

Default Swift container to use when creating objects.

default_domain_id

Type

unknown type

Default

<None>

Optional domain ID to use with v3 and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

default_domain_name

Type

unknown type

Default

<None>

Optional domain name to use with v3 API and v2 parameters. It will be used for both the user and project domain in v3 and ignored in v2 authentication.

delete_after

Type

integer

Default

0

Number of seconds that the Swift object will last before being deleted. (set to 0 to never delete the object).

domain_id

Type

unknown type

Default

<None>

Domain ID to scope to

domain_name

Type

unknown type

Default

<None>

Domain name to scope to

endpoint_override

Type

string

Default

<None>

Always use this endpoint URL for requests for this client. NOTE: The unversioned endpoint should be specified here; to request a particular API version, use the *version*, *min-version*, and/or *max-version* options.

insecure

Type

boolean

Default

False

Verify HTTPS connections.

keyfile

Type

string

Default

<None>

PEM encoded client certificate key file

max_version

Type

string

Default

<None>

The maximum major version of a given API, intended to be used as the upper bound of a range with min_version. Mutually exclusive with version.

min_version

Type

string

Default

<None>

The minimum major version of a given API, intended to be used as the lower bound of a range with max_version. Mutually exclusive with version. If min_version is given with no max_version it is as if max version is latest.

password

Type

unknown type

Default

<None>

Users password

project_domain_id

Type

unknown type

Default

<None>

Domain ID containing project

project_domain_name

Type

unknown type

Default

<None>

Domain name containing project

project_id

Type

unknown type

Default

<None>

Project ID to scope to

Table 37: Deprecated Variations

Group	Name
swift	tenant-id
swift	tenant_id

project_name

Type

unknown type

Default

<None>

Project name to scope to

Table 38: Deprecated Variations

Group	Name
swift	tenant-name
swift	tenant_name

region_name

Type

string

Default

<None>

The default region_name for endpoint URL discovery.

retriable_status_codes

Type

list

Default

<None>

List of retriable HTTP status codes that should be retried. If not set default to [503]

service_name

Type

string

Default

<None>

The default service_name for endpoint URL discovery.

service_type

Type

string

Default

object-store

The default service_type for endpoint URL discovery.

split_loggers

Type

boolean

Default

False

Log requests to multiple loggers.

status_code_retries

Type

integer

Default

<None>

The maximum number of retries that should be attempted for retriable HTTP status codes.

status_code_retry_delay

Type

floating point

Default

<None>

Delay (in seconds) between two retries for retriable status codes. If not set, exponential retry starting with 0.5 seconds up to a maximum of 60 seconds is used.

system_scope

Type

unknown type

Default

<None>

Scope for system operations

tenant_id

Type

unknown type

Default

<None>

Tenant ID

tenant_name

Type

unknown type

Default

<None>

Tenant Name

timeout

Type

integer

Default

<None>

Timeout value for http requests

trust_id

Type

unknown type

Default

<None>

ID of the trust to use as a trustee use

user_domain_id

Type

unknown type

Default

<None>

Users domain id

user_domain_name

Type

unknown type

Default

<None>

Users domain name

user_id

Type

unknown type

Default

<None>

User id

username

Type

unknown type

Default

<None>

Username

Table 39: Deprecated Variations

Group	Name
swift	user-name
swift	user_name

valid_interfaces

Type
list

Default
['internal', 'public']

List of interfaces, in order of preference, for endpoint URL.

version

Type
string

Default
<None>

Minimum Major API version within a given Major API version for endpoint URL discovery. Mutually exclusive with min_version and max_version

3.3.2 Policies

Warning

JSON formatted policy files were deprecated in the Wallaby development cycle due to the Victoria deprecation by the `oslo.policy` library. Use the `oslopolicy-convert-json-to-yaml` tool to convert the existing JSON to YAML formatted policy file in backward compatible way.

The following is an overview of all available policies in **ironic inspector**. For a sample configuration file, refer to *Ironic Inspector Policy*.

ironic_inspector.api**is_admin**

Default
`role:admin or role:administrator or role:baremetal_admin`
Full read/write API access

is_observer

Default
`role:baremetal_observer`
Read-only API access

public_api

Default
`is_public_api:True`
Internal flag for public API routes

default

Default
!

Default API access policy

introspection

Default

rule:public_api

Operations

- **GET /**

Access the API root for available versions information

introspection:version

Default

rule:public_api

Operations

- **GET /{version}**

Access the versioned API root for version information

introspection:continue

Default

rule:public_api

Operations

- **POST /continue**

Ramdisk callback to continue introspection

introspection:status

Default

(role:reader and system_scope:all) or (role:admin) or
(role:service)

Operations

- **GET /introspection**
- **GET /introspection/{node_id}**

Get introspection status

introspection:start

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **POST /introspection/{node_id}**

Start introspection

introspection:abort

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **POST** /introspection/{node_id}/abort

Abort introspection

introspection:data

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **GET** /introspection/{node_id}/data

Get introspection data

introspection:reapply

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **POST** /introspection/{node_id}/data/unprocessed

Reapply introspection on stored data

introspection:rule:get

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **GET** /rules
- **GET** /rules/{rule_id}

Get introspection rule(s)

introspection:rule:delete

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **DELETE** /rules
- **DELETE** /rules/{rule_id}

Delete introspection rule(s)

introspection:rule:create

Default

(role:admin and system_scope:all) or (role:admin) or
(role:service)

Operations

- **POST /rules**

Create introspection rule

3.4 User Guide

3.4.1 How Ironic Inspector Works

How Ironic Inspector Works

Workflow

Usual hardware introspection flow is as follows:

- Operator enrolls nodes into [Ironic](#) e.g. via [baremetal CLI](#) command. Power management credentials should be provided to Ironic at this step.
- Nodes are put in the correct state for introspection as described in [node states](#).
- Operator sends nodes on introspection using **ironic-inspector** API or CLI (see [usage](#)).
- On receiving node UUID **ironic-inspector**:
 - validates node power credentials, current power and provisioning states,
 - allows access to PXE boot service for the nodes,
 - issues reboot command for the nodes, so that they boot the ramdisk.
- The ramdisk collects the required information and posts it back to **ironic-inspector**.
- On receiving data from the ramdisk, **ironic-inspector**:
 - validates received data,
 - finds the node in Ironic database using its BMC address (MAC address in case of SSH driver),
 - fills missing node properties with received data and creates missing ports.

Note

ironic-inspector is responsible to create Ironic ports for some or all NICs found on the node. **ironic-inspector** is also capable of deleting ports that should not be present. There are two important configuration options that affect this behavior: `add_ports` and `keep_ports` (please refer to [the sample configuration file](#) for a detailed explanation).

Default values as of **ironic-inspector** 1.1.0 are `add_ports=pxe`, `keep_ports=all`, which means that only one port will be added, which is associated with NIC the ramdisk PXE booted from. No ports will be deleted. This setting ensures that deploying on introspected nodes will succeed despite [Ironic bug 1405131](#).

Ironic inspection feature by default requires different settings: `add_ports=all`, `keep_ports=present`, which means that ports will be created for all detected NICs, and all other ports will be deleted. Refer to the [Ironic inspection documentation](#) for details.


Ironic inspector can also be configured to not create any ports. This is done by setting `add_ports=disabled`. If setting `add_ports` to disabled the `keep_ports` option should be also set to `all`. This will ensure no manually added ports will be deleted.

- Separate API (see [usage](#) and [API reference](#)) can be used to query introspection results for a given node.
- Nodes are put in the correct state for deploying as described in [node states](#).

Starting DHCP server and configuring PXE boot environment is not part of this package and should be done separately.

State machine diagram

The diagram below shows the introspection states that an **ironic-inspector** FSM goes through during the node introspection, discovery and reprocessing. The diagram also shows events that trigger state transitions.

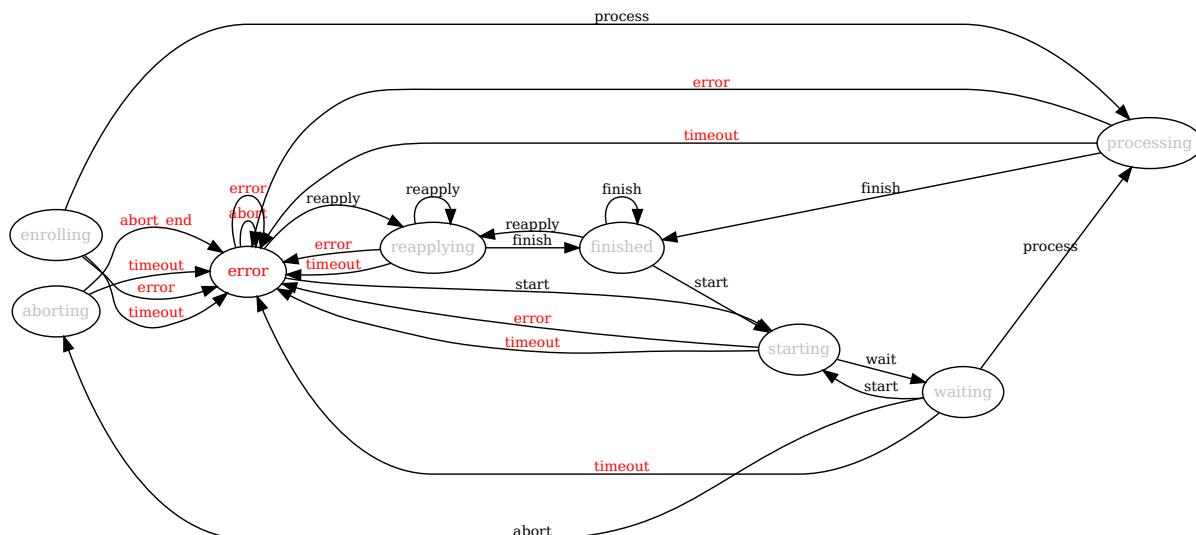

3.4.2 How to use Ironic Inspector

Usage

Refer to the [API reference](#) for information on the HTTP API. Refer to the [client documentation](#) for information on how to use CLI and Python library.

Using from Ironic API

Ironic Kilo introduced support for hardware introspection under name of inspection. **ironic-inspector** introspection is supported for some generic drivers, please refer to [Ironic inspection documentation](#) for details.

Node States

- The nodes should be moved to `MANAGEABLE` provision state before introspection (requires `python-ironicclient` of version 0.5.0 or newer):

```
baremetal node manage <node>
```

- The introspection can be triggered by using the following command:

```
baremetal node inspect <node>
```

- After successful introspection and before deploying nodes should be made available to Nova, by moving them to AVAILABLE state:

```
baremetal node provide <node>
```

Note

Due to how Nova interacts with Ironic driver, you should wait 1 minute before Nova becomes aware of available nodes after issuing this command. Use `nova hypervisor-stats` command output to check it.

Introspection Rules

Inspector supports a simple JSON-based DSL to define rules to run during introspection. Inspector provides an API to manage such rules, and will run them automatically after running all processing hooks.

A rule consists of conditions to check, and actions to run. If conditions evaluate to true on the introspection data, then actions are run on a node.

Please refer to the command below to import introspection rule:

```
baremetal introspection rule import <json file>
```

Available conditions and actions are defined by plugins, and can be extended, see [How To Contribute](#) for details. See the [API reference](#) for specific calls to define introspection rules.

Conditions

A condition is represented by an object with fields:

op the type of comparison operation, default available operators include:

- `eq`, `le`, `ge`, `ne`, `lt`, `gt` - basic comparison operators;
- `in-net` - checks that an IP address is in a given network;
- `matches` - requires a full match against a given regular expression;
- `contains` - requires a value to contain a given regular expression;
- `is-empty` - checks that field is an empty string, list, dict or None value.

field a [JSON path](#) to the field in the introspection data to use in comparison.

Starting with the Mitaka release, you can also apply conditions to ironic node field. Prefix field with schema (`data://` or `node://`) to distinguish between values from introspection data and node. Both schemes use JSON path:

```
{"field": "node://property.path", "op": "eq", "value": "val"}  
{"field": "data://introspection.path", "op": "eq", "value": "val"}
```

if scheme (node or data) is missing, condition compares data with introspection data.

`invert` boolean value, whether to invert the result of the comparison.

`multiple` how to treat situations where the `field` query returns multiple results (e.g. the field contains a list), available options are:

- `any` (the default) require any to match,
- `all` require all to match,
- `first` require the first to match.

All other fields are passed to the condition plugin, e.g. numeric comparison operations require a `value` field to compare against.

Scope

By default, introspection rules are applied to all nodes being inspected. In order for the rule to be applied only to specific nodes, a matching scope variable must be set to both the rule and the node. To set the scope for a rule include field "`scope`" in JSON file before importing. For example:

```
cat <json file>
{
  "description": "...",
  "actions": [...],
  "conditions": [...],
  "scope": "SCOPE"
}
```

Set the property `inspection_scope` on the node you want the rule to be applied to:

```
baremetal node set --property inspection_scope="SCOPE" <node>
```

Now, when inspecting, the rule will be applied only to nodes with matching scope value. It will also ignore nodes that do not have `inspection_scope` property set. Note that if a rule has no scope set, it will be applied to all nodes, regardless if they have `inspection_scope` set or not.

Actions

An action is represented by an object with fields:

`action` type of action. Possible values are defined by plugins.

All other fields are passed to the action plugin.

Default available actions include:

- `fail` fail introspection. Requires a `message` parameter for the failure message.
- `set-attribute` sets an attribute on an Ironic node. Requires a `path` field, which is the path to the attribute as used by ironic (e.g. `/properties/something`), and a `value` to set.

- **set-capability** sets a capability on an Ironic node. Requires name and value fields, which are the name and the value for a new capability accordingly. Existing value for this same capability is replaced.
- **extend-attribute** the same as **set-attribute**, but treats existing value as a list and appends value to it. If optional unique parameter is set to True, nothing will be added if given value is already in a list.
- **add-trait** adds a trait to an Ironic node. Requires a name field with the name of the trait to add.
- **remove-trait** removes a trait from an Ironic node. Requires a name field with the name of the trait to remove.

Starting from Mitaka release, value field in actions supports fetching data from introspection, using python string formatting notation:

```
{"action": "set-attribute", "path": "/driver_info/ipmi_address",
"value": "{data[inventory][bmc_address]}"}
```

Note that any value referenced in this way will be converted to a string.

If value is a dict or list, strings nested at any level within the structure will be formatted as well:

```
{"action": "set-attribute", "path": "/properties/root_device",
"value": {"serial": "{data[root_device][serial]}"}}
```

Plugins

ironic-inspector heavily relies on plugins for data processing. Even the standard functionality is largely based on plugins. Set `processing_hooks` option in the configuration file to change the set of plugins to be run on introspection data. Note that order **does** matter in this option, especially for hooks that have dependencies on other hooks.

These are plugins that are enabled by default and should not be disabled, unless you understand what you're doing:

scheduler

validates and updates basic hardware scheduling properties: CPU number and architecture, memory and disk size.

Note

Diskless nodes have the disk size property `local_gb == 0`. Always use node driver `root_device` hints to prevent unexpected HW failures passing silently.

validate_interfaces

validates network interfaces information. Creates new ports, optionally deletes ports that were not present in the introspection data. Also sets the `pxe_enabled` flag for the PXE-booting port and unsets it for all the other ports to avoid `nova` picking a random port to boot the node.

Note

When the `pxe_filter` is configured to only open the DHCP server for known MAC addresses, i.e the `[pxe_filter]deny_unknown_macs` configuration option is enabled, it is not possible

to rely on the `validate_interfaces` processing plug-in to create the PXE-booting port in ironic. Nodes must have at least one enrolled port prior to introspection in this case.

The following plugins are enabled by default, but can be disabled if not needed:

ramdisk_error

reports error, if `error` field is set by the ramdisk, also optionally stores logs from `logs` field, see the [API reference](#) for details.

capabilities

detect node capabilities: CPU, boot mode, etc. See [Capabilities Detection](#) for more details.

pci_devices

gathers the list of all PCI devices returned by the ramdisk and compares to those defined in `alias` field(s) from `pci_devices` section of configuration file. The recognized PCI devices and their count are then stored in node properties. This information can be later used in nova flavors for node scheduling.

Here are some plugins that can be additionally enabled:

example

example plugin logging its input and output.

raid_device

gathers block devices from ramdisk and exposes root device in multiple runs.

extra_hardware

stores the value of the `data` key returned by the ramdisk as a JSON encoded string in a Swift object. The plugin will also attempt to convert the data into a format usable by introspection rules. If this is successful then the new format will be stored in the `extra` key. The `data` key is then deleted from the introspection data, as unless converted its assumed unusable by introspection rules.

lldp_basic

Processes LLDP data returned from inspection, parses TLVs from the Basic Management (802.1AB), 802.1Q, and 802.3 sets and stores the processed data back in the Ironic inspector database. To enable LLDP in the inventory from IPA, `ipa-collect-lldp=1` should be passed as a kernel parameter to the IPA ramdisk.

local_link_connection

Processes LLDP data returned from inspection, specifically looking for the port ID and chassis ID. If found, it configures the local link connection information on the Ironic ports with that data. To enable LLDP in the inventory from IPA, `ipa-collect-lldp=1` should be passed as a kernel parameter to the IPA ramdisk. In order to avoid processing the raw LLDP data twice, the `lldp_basic` plugin should also be installed and run prior to this plugin.

physnet_cidr_map

Configures the `physical_network` property of the nodes Ironic port when the IP address is in a configured CIDR mapping. CIDR to physical network mappings is set in configuration using the `[port_physnet]/cidr_map` option, for example:

```
[port_physnet]
cidr_map = 10.10.10.0/24:physnet_a, 2001:db8::/64:physnet_b
```

accelerators

Processes PCI data returned from inspection and compares with the accelerator inventory, it will

update accelerator device information to the properties field of the ironic node if any accelerator device is found, for example:

```
{'local_gb': '1115', 'cpus': '40', 'cpu_arch': 'x86_64', 'memory_mb':  
    ↪ '32768',  
    'capabilities': 'boot_mode:bios,cpu_vt:true,cpu_aes:true,cpu_  
    ↪ hugepages:true,cpu_hugepages_1g:true,cpu_ctxt:true',  
    'accel': [{ 'vendor_id': '10de', 'device_id': '1eb8', 'type': 'GPU',  
        'pci_address': '0000:82:00.0',  
        'device_info': 'NVIDIA Corporation Tesla T4'}]}
```

Refer to [How To Contribute](#) for information on how to write your own plugin.

Discovery

Starting from Mitaka, **ironic-inspector** is able to register new nodes in Ironic.

The existing node-not-found-hook handles what happens if **ironic-inspector** receives inspection data from a node it can not identify. This can happen if a node is manually booted without registering it with Ironic first.

For discovery, the configuration file option `node_not_found_hook` should be set to load the hook called `enroll1`. This hook will enroll the unidentified node into Ironic using the `fake-hardware` hardware type. This is a configurable option: set `enroll_node_driver` in the `ironic-inspector` configuration file to the hardware type you want. You can also configure arbitrary fields to set on discovery, for example:

```
[discovery]
enroll_node_driver = ipmi
enroll_node_fields = management_interface:noop,resource_class:baremetal
```

The `enroll` hook will also set the `ipmi_address` property on the new node, if its available in the introspection data we received, see [ramdisk callback](#).

Once the `enroll` hook is finished, **ironic-inspector** will process the introspection data in the same way it would for an identified node. It runs the processing [plugins](#), and after that it runs introspection rules, which would allow for more customisable node configuration, see [rules](#).

A rule to set a nodes Ironic driver to ipmi and populate the required `driver_info` for that driver would look like:

```
[{
  "description": "Set IPMI driver_info if no credentials",
  "actions": [
    {"action": "set-attribute", "path": "driver", "value": "ipmi"},
    {"action": "set-attribute", "path": "driver_info/ipmi_username",
     "value": "username"},
    {"action": "set-attribute", "path": "driver_info/ipmi_password",
     "value": "password"}
  ],
  "conditions": [
    {"op": "is-empty", "field": "node://driver_info.ipmi_password"},
    {"op": "is-empty", "field": "node://driver_info.ipmi_username"}
```

(continues on next page)

(continued from previous page)

```

        ],
    },
    "description": "Set deploy info if not already set on node",
    "actions": [
        {"action": "set-attribute", "path": "driver_info/deploy_kernel",
         "value": "<glance uuid>"},
        {"action": "set-attribute", "path": "driver_info/deploy_ramdisk",
         "value": "<glance uuid>"}
    ],
    "conditions": [
        {"op": "is-empty", "field": "node://driver_info.deploy_ramdisk"},
        {"op": "is-empty", "field": "node://driver_info.deploy_kernel"}
    ]
}
]

```

All nodes discovered and enrolled via the `enroll` hook, will contain an `auto_discovered` flag in the introspection data, this flag makes it possible to distinguish between manually enrolled nodes and auto-discovered nodes in the introspection rules using the rule condition `eq`:

```

{
    "description": "Enroll auto-discovered nodes with ipmi hardware type",
    "actions": [
        {"action": "set-attribute", "path": "driver", "value": "ipmi"}
    ],
    "conditions": [
        {"op": "eq", "field": "data://auto_discovered", "value": true}
    ]
}

```

Reapplying introspection on stored data

To allow correcting mistakes in introspection rules the API provides an entry point that triggers the introspection over stored data. The data to use for processing is kept in Swift separately from the data already processed. Reapplying introspection overwrites processed data in the store. Updating the introspection data through the endpoint isn't supported yet. Following preconditions are checked before reapplying introspection:

- no data is being sent along with the request
- Swift store is configured and enabled
- introspection data is stored in Swift for the node UUID
- node record is kept in database for the UUID
- introspection is not ongoing for the node UUID

Should the preconditions fail an immediate response is given to the user:

- **400** if the request contained data or in case Swift store is not enabled in configuration
- **404** in case Ironic doesn't keep track of the node UUID
- **409** if an introspection is already ongoing for the node

If the preconditions are met a background task is executed to carry out the processing and a 202 Accepted response is returned to the endpoint user. As requested, these steps are performed in the background task:

- preprocessing hooks
- post processing hooks, storing result in Swift
- introspection rules

These steps are avoided, based on the feature requirements:

- `node_not_found_hook` is skipped
- power operations
- roll-back actions done by hooks

Limitations:

- there's no way to update the unprocessed data atm.
- the unprocessed data is never cleaned from the store
- check for stored data presence is performed in background; missing data situation still results in a 202 response

Capabilities Detection

Starting with the Newton release, **Ironic Inspector** can optionally discover several node capabilities. A recent (Newton or newer) IPA image is required for it to work.

Boot mode

The current boot mode (BIOS or UEFI) can be detected and recorded as `boot_mode` capability in Ironic. It will make some drivers to change their behaviour to account for this capability. Set the `capabilities.boot_mode` configuration option to True to enable.

CPU capabilities

Several CPU flags are detected by default and recorded as following capabilities:

- `cpu_aes` AES instructions.
- `cpu_vt` virtualization support.
- `cpu_ttx` TXT support.
- `cpu_hugepages` huge pages (2 MiB) support.
- `cpu_hugepages_1g` huge pages (1 GiB) support.

It is possible to define your own rules for detecting CPU capabilities. Set the `capabilities.cpu_flags` configuration option to a mapping between a CPU flag and a capability, for example:

```
cpu_flags = aes:cpu_aes,svm:cpu_vt,vmx:cpu_vt
```

See the default value of this option for a more detail example.

InfiniBand support

Starting with the Ocata release, **Ironic Inspector** supports detection of InfiniBand network interfaces. A recent (Ocata or newer) IPA image is required for that to work. When an InfiniBand network interface is discovered, the **Ironic Inspector** adds a `client-id` attribute to the `extra` attribute in the ironic port. The **Ironic Inspector** should be configured with `iptables.ethoib_interfaces` to indicate the Ethernet Over InfiniBand (EoIB) which are used for physical access to the DHCP network. For example if **Ironic Inspector** DHCP server is using `br-inspector` and the `br-inspector` has EoIB port e.g. `eth0`, the `iptables.ethoib_interfaces` should be set to `eth0`. The `iptables.ethoib_interfaces` allows to map the baremetal GUID to its EoIB MAC based on the `neighs` files. This is needed for blocking DHCP traffic of the nodes (MACs) which are not part of the introspection.

The format of the `/sys/class/net/<ethoib>/eth/neighs` file:

```
# EMAC=<ethernet mac of the ethoib> IMAC=<qp number:lid:GUID>
# For example:
IMAC=97:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:26:52
qp number=97:fe
lid=80:00:00:00:00:00:00
GUID=7c:fe:90:03:00:29:26:52
```

Example of content:

```
EMAC=02:00:02:97:00:01 IMAC=97:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:26:52
EMAC=02:00:00:61:00:02 IMAC=61:fe:80:00:00:00:00:00:7c:fe:90:03:00:29:24:4f
```

3.4.3 HTTP API Reference

- Bare Metal Introspection API Reference.

3.4.4 Troubleshooting

Troubleshooting

Errors when starting introspection

- *Invalid provision state available*

In Kilo release with `python-ironicclient` 0.5.0 or newer Ironic defaults to reporting provision state `AVAILABLE` for newly enrolled nodes. **ironic-inspector** will refuse to conduct introspection in this state, as such nodes are supposed to be used by Nova for scheduling. See `node states` for instructions on how to put nodes into the correct state.

Introspection times out

There may be 3 reasons why introspection can time out after some time (defaulting to 60 minutes, altered by `timeout` configuration option):

1. Fatal failure in processing chain before node was found in the local cache. See [Troubleshooting data processing](#) for the hints.
2. Failure to load the ramdisk on the target node. See [Troubleshooting PXE boot](#) for the hints.
3. Failure during ramdisk run. See [Troubleshooting ramdisk run](#) for the hints.

Troubleshooting data processing

In this case **ironic-inspector** logs should give a good idea what went wrong. E.g. for RDO or Fedora the following command will output the full log:

```
sudo journalctl -u openstack-ironic-inspector
```

(use **openstack-ironic-discoverd** for version < 2.0.0).

Note

Service name and specific command might be different for other Linux distributions (and for old version of **ironic-inspector**).

If **ramdisk_error** plugin is enabled and **ramdisk_logs_dir** configuration option is set, **ironic-inspector** will store logs received from the ramdisk to the **ramdisk_logs_dir** directory. This depends, however, on the ramdisk implementation.

A local cache miss during data processing would leave a message like:

```
ERROR ironic_python_agent.inspector [-] inspectorerror 400: {"error": {"message": "The following failures happened during running pre-processing hooks:\nLook up error: Could not find a node for attributes {'bmc_address': u'10.x.y.z', 'mac': [u'00:aa:bb:cc:dd:ee', u'00:aa:bb:cc:dd:ef']}"}}
```

One potential explanation for such an error is a misconfiguration in the BMC where a channel with the wrong IP address is active (and hence detected and reported back by the Ironic Python Agent), but can then not be matched to the IP address Ironic has in its cache for this node.

Troubleshooting PXE boot

PXE booting most often becomes a problem for bare metal environments with several physical networks. If the hardware vendor provides a remote console (e.g. iDRAC for DELL), use it to connect to the machine and see what is going on. You may need to restart introspection.

Another source of information is DHCP and TFTP server logs. Their location depends on how the servers were installed and run. For RDO or Fedora use:

```
$ sudo journalctl -u openstack-ironic-inspector-dnsmasq
```

(use **openstack-ironic-discoverd-dnsmasq** for version < 2.0.0).

The last resort is **tcpdump** utility. Use something like

```
$ sudo tcpdump -i any port 67 or port 68 or port 69
```

to watch both DHCP and TFTP traffic going through your machine. Replace **any** with a specific network interface to check that DHCP and TFTP requests really reach it.

If you see node not attempting PXE boot or attempting PXE boot on the wrong network, reboot the machine into BIOS settings and make sure that only one relevant NIC is allowed to PXE boot.

If you see node attempting PXE boot using the correct NIC but failing, make sure that:

1. network switches configuration does not prevent PXE boot requests from propagating,

2. there is no additional firewall rules preventing access to port 67 on the machine where *ironic-inspector* and its DHCP server are installed.

If you see node receiving DHCP address and then failing to get kernel and/or ramdisk or to boot them, make sure that:

1. TFTP server is running and accessible (use `tftp` utility to verify),
2. no firewall rules prevent access to TFTP port,
3. SELinux is configured properly to allow external TFTP access,

If SELinux is neither permissive nor disabled, you should config `tftp_home_dir` in SELinux by executing the command

```
$ sudo setsebool -P tftp_home_dir 1
```

See [the man page](#) for more details.

4. DHCP server is correctly set to point to the TFTP server,
5. `pxelinux.cfg/default` within TFTP root contains correct reference to the kernel and ramdisk.

Note

If using iPXE instead of PXE, check the HTTP server logs and the iPXE configuration instead.

Troubleshooting ramdisk run

First, check if the ramdisk logs were stored locally as described in the [Troubleshooting data processing](#) section. If not, ensure that the ramdisk actually booted as described in the [Troubleshooting PXE boot](#) section.

Finally, you can try connecting to the IPA ramdisk. If you have any remote console access to the machine, you can check the logs as they appear on the screen. Otherwise, you can rebuild the IPA image with your SSH key to be able to log into it. Use the `dynamic-login` or `devuser` element for a DIB-based build or put an `authorized_keys` file in `/usr/share/oem/` for a CoreOS-based one.

Troubleshooting DNS issues on Ubuntu

Ubuntu uses local DNS caching, so tries localhost for DNS results first before calling out to an external DNS server. When DNSmasq is installed and configured for use with ironic-inspector, it can cause problems by interfering with the local DNS cache. To fix this issue ensure that `/etc/resolv.conf` points to your external DNS servers and not to `127.0.0.1`.

On Ubuntu 14.04 this can be done by editing your `/etc/resolvconf/resolv.conf.d/head` and adding your nameservers there. This will ensure they will come up first when `/etc/resolv.conf` is regenerated.

Troubleshooting DnsmasqFilter

When introspection fails and the following error is in `ironic-inspector.log`

```
ERROR ironic_inspector.node_cache [-] [node: 651da5a3-4ecb-4214-a87d-
˓→139cc7778c05
```

(continues on next page)

(continued from previous page)

```
state starting] Processing the error event because of an exception
<class 'ironic_inspector.pxe_filter.base.InvalidFilterDriverState':>
The PXE filter driver DnsmasqFilter, state=uninitialized: my fsm encountered
→an
exception: Can not transition from state 'uninitialized' on event 'sync'
(no defined transition) raised by ironic_inspector.introspect._do_introspect:
ironic_inspector.pxe_filter.base.InvalidFilterDriverState: The PXE filter
→driver
DnsmasqFilter, state=uninitialized: my fsm encountered an exception:
Can not transition from state 'uninitialized' on event 'sync'
(no defined transition)
```

restart ironic-inspector.

Running Inspector in a VirtualBox environment

By default VirtualBox does not expose a DMI table to the guest. This prevents ironic-inspector from being able to discover the properties of the a node. In order to run ironic-inspector on a VirtualBox guest the host must be configured to expose DMI data inside the guest. To do this run the following command on the VirtualBox host:

```
VBoxManage setextradata {NodeName} "VBoxInternal/Devices/pcbios/0/Config/
→DmiExposeMemoryTable" 1
```

Note

Replace *{NodeName}* with the name of the guest you wish to expose the DMI table on. This command will need to be run once per host to enable this functionality.

HTTP API

See <https://docs.openstack.org/api-ref/baremetal-introspection/>

3.5 Administrator Guide

3.5.1 How to upgrade Ironic Inspector

Upgrade Guide

The [release notes](#) should always be read carefully when upgrading the ironic-inspector service. Starting with the Mitaka series, specific upgrade steps and considerations are well-documented in the release notes.

Upgrades are only supported one series at a time, or within a series. Only offline (with downtime) upgrades are currently supported.

When upgrading ironic-inspector, the following steps should always be taken:

- Update ironic-inspector code, without restarting the service yet.
- Stop the ironic-inspector service.

- Run database migrations:

```
ironic-inspector-dbsync --config-file <PATH-TO-INSPECTOR.CONF> upgrade
```

- Start the ironic-inspector service.
- Upgrade the ironic-python-agent image used for introspection.

Note

There is no implicit upgrade order between ironic and ironic-inspector, unless the [release notes](#) say otherwise.

Migrating introspection data

Starting with Stein release, ironic-inspector supports two introspection data storage backends: `swift` and `database`. If you decide to change the backend, you can use the provided command to migrate the data:

```
ironic-inspector-migrate-data --from swift --to database --config-file /etc/
↳ironic-inspector/inspector.conf
```

Note

Configuration for **both** backends is expected to be present in the configuration file for this command to succeed.

3.5.2 Dnsmasq PXE filter driver

dnsmasq PXE filter

An inspection PXE DHCP stack is often implemented by the `dnsmasq` service. The `dnsmasq` PXE filter implementation relies on directly configuring the `dnsmasq` DHCP service to provide a caching PXE traffic filter of node MAC addresses.

How it works

The filter works by populating the `dnsmasq` DHCP hosts directory with a configuration file per MAC address. Each file is either enabling or disabling, thru the `ignore` directive, the DHCP service for a particular MAC address:

```
$ cat /etc/dnsmasq.d/de-ad-be-ef-de-ad
de:ad:be:ef:de:ad,ignore
$
```

The filename is used to keep track of all MAC addresses in the cache, avoiding file parsing. The content of the file determines the MAC address access policy.

Thanks to the `inotify` facility, `dnsmasq` is notified once a new file is *created* or an existing file is *modified* in the DHCP hosts directory. Thus, to allow a MAC address, the filter removes the `ignore` directive:

```
$ cat /etc/dnsmasq.d/de-ad-be-ef-de-ad  
de:ad:be:ef:de:ad  
$
```

The hosts directory content establishes a *cached* MAC addresses filter that is kept synchronized with the **ironic** port list.

Note

The **dnsmasq** inotify facility implementation doesn't react to a file being removed or truncated.

Configuration

The inotify facility was [introduced](#) to **dnsmasq** in the version 2.73. This filter driver has been checked by **ironic-inspector** CI with **dnsmasq** versions ≥ 2.76 .

To enable the **dnsmasq** PXE filter, update the PXE filter driver name in the **ironic-inspector** configuration file:

```
[pxe_filter]  
driver = dnsmasq
```

The DHCP hosts directory can be specified to override the default `/var/lib/ironic-inspector/dhcp-hostsdir`:

```
[dnsmasq_pxe_filter]  
dhcp_hostsdir = /etc/ironic-inspector/dhcp-hostsdir
```

The filter design relies on the hosts directory being in exclusive **ironic-inspector** control. The hosts directory should be considered a *private cache* directory of **ironic-inspector** that **dnsmasq** polls configuration updates from, through the inotify facility. The directory has to be writable by **ironic-inspector** and readable by **dnsmasq**.

It is also possible to override the default (empty) **dnsmasq** start and stop commands to, for instance, directly control the **dnsmasq** service:

```
[dnsmasq_pxe_filter]  
dnsmasq_start_command = dnsmasq --conf-file /etc/ironic-inspector/dnsmasq.conf  
dnsmasq_stop_command = kill $(cat /var/run/dnsmasq.pid)
```

Note

The commands support shell expansion. The default empty start command means the **dnsmasq** service won't be started upon the filter initialization. Conversely, the default empty stop command means the service won't be stopped upon an (error) exit.

Note

These commands are executed through the **rootwrap** facility, so overriding may require a filter file to

be created in the `rootwrap.d` directory. A sample configuration to use with the `systemctl` facility might be:

```
sudo cat > /etc/ironic-inspector/rootwrap.d/ironic-inspector-dnsmasq-
→systemctl.filters <<EOF
[Filters]
# ironic_inspector/pxe_filter/dnsmasq.py
systemctl: CommandFilter, systemctl, root, restart, dnsmasq
systemctl: CommandFilter, systemctl, root, stop, dnsmasq
EOF
```

Caveats

The initial synchronization will put some load on the `dnsmasq` service starting based on the amount of ports `ironic` keeps. The start-up can take up to a minute of full CPU load for huge amounts of MACs (tens of thousands). Subsequent filter synchronizations will only cause the `dnsmasq` to parse the modified files. Typically those are the bare metal nodes being added or phased out from the compute service, meaning dozens of file updates per sync call.

The `ironic-inspector` takes over the control of the DHCP hosts directory to implement its filter cache. Files are generated dynamically so should not be edited by hand. To minimize the interference between the deployment and introspection, `ironic-inspector` has to start the `dnsmasq` service only after the initial synchronization. Conversely, the `dnsmasq` service is stopped upon (unexpected) `ironic-inspector` exit.

To avoid accumulating stale DHCP host files over time, the driver cleans up the DHCP hosts directory before the initial synchronization during the start-up.

Although the filter driver tries its best to always stop the `dnsmasq` service, it is recommended that the operator configures the `dnsmasq` service in such a way that it terminates upon `ironic-inspector` (unexpected) exit to prevent a stale deny list from being used by the `dnsmasq` service.

CONTRIBUTOR DOCS

4.1 How To Contribute

4.1.1 Basics

- Our source code is hosted on [OpenStack GitHub](#), but please do not send pull requests there.
- Please follow usual OpenStack [Gerrit Workflow](#) to submit a patch.
- Update change log in README.rst on any significant change.
- It goes without saying that any code change should be accompanied by unit tests.
- Note the branch you're proposing changes to. `master` is the current focus of development, use `stable/VERSION` for proposing an urgent fix, where `VERSION` is the current stable series. E.g. at the moment of writing the stable branch is `stable/1.0`.
- Please file an RFE in [StoryBoard](#) for any significant code change and a regular story for any significant bug fix.

4.1.2 Development Environment

First of all, install `tox` utility. It's likely to be in your distribution repositories under name of `python-tox`. Alternatively, you can install it from PyPI.

Next checkout and create environments:

```
git clone https://github.com/openstack/ironic-inspector.git
cd ironic-inspector
tox
```

Repeat `tox` command each time you need to run tests. If you don't have Python interpreter of one of supported versions (currently 3.6 and 3.7), use `-e` flag to select only some environments, e.g.

```
tox -e py36
```

Note

This command also runs tests for database migrations. By default the sqlite backend is used. For testing with mysql or postgresql, you need to set up a db named `openstack_citest` with user `openstack_citest` and password `openstack_citest` on localhost. Use the script `tools/test_setup.sh` to set the database up the same way as done in the OpenStack CI environment.

Note

Users of Fedora <= 23 will need to run sudo dnf releasever=24 update python-virtualenv to run unit tests

To run the functional tests, use:

```
tox -e func
```

Once you have added new state or transition into inspection state machine, you should regenerate *State machine diagram* with:

```
tox -e genstates
```

Run the service with:

```
.tox/py36/bin/ironic-inspector --config-file example.conf
```

Of course you may have to modify `example.conf` to match your OpenStack environment. See the [install guide](#) for information on generating or downloading an example configuration file.

You can develop and test **ironic-inspector** using DevStack - see [Deploying Ironic Inspector with DevStack](#) for the current status.

4.1.3 Deploying Ironic Inspector with DevStack

DevStack provides a way to quickly build a full OpenStack development environment with requested components. There is a plugin for installing **ironic-inspector** in DevStack. Installing **ironic-inspector** requires a machine running Ubuntu 14.04 (or later) or Fedora 23 (or later). Make sure this machine is fully up to date and has the latest packages installed before beginning this process.

Download DevStack:

```
git clone https://git.openstack.org/openstack-dev/devstack.git  
cd devstack
```

Create `local.conf` file with minimal settings required to enable both the **ironic** and the **ironic-inspector**. You can start with the [Example local.conf](#) and extend it as needed.

Example local.conf

```
[[local|localrc]]  
# Credentials  
ADMIN_PASSWORD=password  
DATABASE_PASSWORD=password  
RABBIT_PASSWORD=password  
SERVICE_PASSWORD=password  
SERVICE_TOKEN=password  
SWIFT_HASH=password  
SWIFT_TEMPURL_KEY=password  
  
# Enable Ironic plugin
```

(continues on next page)

(continued from previous page)

```
enable_plugin ironic https://opendev.org/openstack/ironic
enable_plugin ironic-inspector https://opendev.org/openstack/ironic-inspector

# Disable nova novnc service, ironic does not support it anyway.
disable_service n-novnc

# Enable Swift for the direct deploy interface.
enable_service s-proxy
enable_service s-object
enable_service s-container
enable_service s-account

# Disable Horizon
disable_service horizon

# Disable Cinder
disable_service cinder c-sch c-api c-vol

# Swift temp URL's are required for the direct deploy interface
SWIFT_ENABLE_TEMPURLS=True

# Create 3 virtual machines to pose as Ironic's baremetal nodes.
IRONIC_VM_COUNT=3
IRONIC_BAREMETAL_BASIC_OPS=True
DEFAULT_INSTANCE_TYPE=baremetal

# Enable additional hardware types, if needed.
#IRONIC_ENABLED_HARDWARE_TYPES=ipmi,fake-hardware
# Don't forget that many hardware types require enabling of additional
# interfaces, most often power and management:
#IRONIC_ENABLED_MANAGEMENT_INTERFACES=ipmitool,fake
#IRONIC_ENABLED_POWER_INTERFACES=ipmitool,fake
# The 'ipmi' hardware type's default deploy interface is 'iscsi'.
# This would change the default to 'direct'.
#IRONIC_DEFAULT_DEPLOY_INTERFACE=direct

# Enable inspection via ironic-inspector
IRONIC_ENABLED_INSPECT_INTERFACES=inspector,no-inspect
# Make it the default for all hardware types:
IRONIC_DEFAULT_INSPECT_INTERFACE=inspector

# Change this to alter the default driver for nodes created by devstack.
# This driver should be in the enabled list above.
IRONIC_DEPLOY_DRIVER=ipmi

# The parameters below represent the minimum possible values to create
# functional nodes.
IRONIC_VM_SPECS_RAM=2048
IRONIC_VM_SPECS_DISK=10
```

(continues on next page)

(continued from previous page)

```
# Size of the ephemeral partition in GB. Use 0 for no ephemeral partition.  
IRONIC_VM_EPHEMERAL_DISK=0  
  
# To build your own IPA ramdisk from source, set this to True  
IRONIC_BUILD_DEPLOY_RAMDISK=False  
IRONIC_INSPECTOR_BUILD_RAMDISK=False  
VIRT_DRIVER=ironic  
  
# By default, DevStack creates a 10.0.0.0/24 network for instances.  
# If this overlaps with the hosts network, you may adjust with the  
# following.  
NETWORK_GATEWAY=10.1.0.1  
FIXED_RANGE=10.1.0.0/24  
FIXED_NETWORK_SIZE=256  
  
# Log all output to files  
LOGFILE=/opt/stack/devstack.log  
LOGDIR=/opt/stack/logs  
IRONIC_VM_LOG_DIR=/opt/stack/ironic-bm-logs
```

Notes

- Set IRONIC_INSPECTOR_BUILD_RAMDISK to True if you want to build ramdisk. Default value is False and ramdisk will be downloaded instead of building.
- 1024 MiB of RAM is a minimum required for the default build of IPA based on CoreOS. If you plan to use another operating system and build IPA with diskimage-builder 2048 MiB is recommended.
- Network configuration is pretty sensitive, better not to touch it without deep understanding.
- This configuration disables **horizon**, **heat**, **cinder** and **tempest**, adjust it if you need these services.

Start the install:

```
./stack.sh
```

Usage

After installation is complete, you can source `openrc` in your shell, and then use the OpenStack CLI to manage your DevStack:

```
source openrc admin demo
```

Show DevStack screens:

```
screen -x stack
```

To exit screen, hit CTRL-a d.

List baremetal nodes:

```
baremetal node list
```

Bring the node to manageable state:

```
baremetal node manage <NodeID>
```

Inspect the node:

```
baremetal node inspect <NodeID>
```

Note

The deploy driver used must support the inspect interface. See also the [Ironic Python Agent](#).

A node can also be inspected using the following command. However, this will not affect the provision state of the node:

```
baremetal introspection start <NodeID>
```

Check inspection status:

```
baremetal introspection status <NodeID>
```

Optionally, get the inspection data:

```
baremetal introspection data save <NodeID>
```

4.1.4 Writing a Plugin

- **ironic-inspector** allows you to hook code into the data processing chain after introspection. Inherit `ProcessingHook` class defined in `ironic_inspector.plugins.base module` and overwrite any or both of the following methods:

`before_processing(introspection_data, **)`

called before any data processing, providing the raw data. Each plugin in the chain can modify the data, so order in which plugins are loaded matters here. Returns nothing.

`before_update(introspection_data, node_info, **)`

called after node is found and ports are created, but before data is updated on a node. Please refer to the docstring for details and examples.

You can optionally define the following attribute:

`dependencies`

a list of entry point names of the hooks this hook depends on. These hooks are expected to be enabled before the current hook.

Make your plugin a setuptools entry point under `ironic_inspector.hooks.processing` namespace and enable it in the configuration file (`processing.processing_hooks` option).

- **ironic-inspector** allows plugins to override the action when node is not found in node cache. Write a callable with the following signature:

`(introspection_data, **)`

called when node is not found in cache, providing the processed data. Should return a `NodeInfo` class instance.

Make your plugin a setuptools entry point under `ironic_inspector.hooks.node_not_found` namespace and enable it in the configuration file (`processing.node_not_found_hook` option).

- **ironic-inspector** allows more condition types to be added for *Introspection Rules*. Inherit `RuleConditionPlugin` class defined in `ironic_inspector.plugins.base module` and overwrite at least the following method:

`check(node_info, field, params, **)`

called to check that condition holds for a given field. Field value is provided as `field` argument, `params` is a dictionary defined at the time of condition creation. Returns boolean value.

The following methods and attributes may also be overridden:

`validate(params, **)`

called to validate parameters provided during condition creating. Default implementation requires keys listed in `REQUIRED_PARAMS` (and only them).

`REQUIRED_PARAMS`

contains set of required parameters used in the default implementation of `validate` method, defaults to `value` parameter.

`ALLOW_NONE`

if its set to `True`, missing fields will be passed as `None` values instead of failing the condition. Defaults to `False`.

Make your plugin a setuptools entry point under `ironic_inspector.rules.conditions` namespace.

- **ironic-inspector** allows more action types to be added for *Introspection Rules*. Inherit `RuleActionPlugin` class defined in `ironic_inspector.plugins.base module` and overwrite at least the following method:

`apply(node_info, params, **)`

called to apply the action.

The following methods and attributes may also be overridden:

`validate(params, **)`

called to validate parameters provided during actions creating. Default implementation requires keys listed in `REQUIRED_PARAMS` (and only them).

`REQUIRED_PARAMS`

contains set of required parameters used in the default implementation of `validate` method, defaults to no parameters.

Make your plugin a setuptools entry point under `ironic_inspector.rules.conditions` namespace.

Note

`**` argument is needed so that we can add optional arguments without breaking out-of-tree plugins. Please make sure to include and ignore it.

4.1.5 Making changes to the database

In order to make a change to the ironic-inspector database you must update the database models found in [ironic_inspector.db package](#) and then create a migration to reflect that change.

There are two ways to create a migration which are described below, both of these generate a new migration file. In this file there is only one function:

- **upgrade - The function to run when**

`ironic-inspector-dbsync upgrade` is run, and should be populated with code to bring the database up to its new state from the state it was in after the last migration.

For further information on creating a migration, refer to [Create a Migration Script](#) from the alembic documentation.

Autogenerate

This is the simplest way to create a migration. Alembic will compare the models to an up to date database, and then attempt to write a migration based on the differences. This should generate correct migrations in most cases however there are some cases when it can not detect some changes and may require manual modification, see [What does Autogenerate Detect \(and what does it not detect?\)](#) from the alembic documentation.

```
ironic-inspector-dbsync upgrade  
ironic-inspector-dbsync revision -m "A short description" --autogenerate
```

Manual

This will generate an empty migration file, with the correct revision information already included. However the upgrade function is left empty and must be manually populated in order to perform the correct actions on the database:

```
ironic-inspector-dbsync revision -m "A short description"
```

4.1.6 Implementing PXE Filter Drivers

Background

inspector in-band introspection PXE-boots the Ironic Python Agent live image, to inspect the baremetal server. **ironic** also PXE-boots IPA to perform tasks on a node, such as deploying an image. **ironic** uses **neutron** to provide DHCP, however **neutron** does not provide DHCP for unknown MAC addresses so **inspector** has to use its own DHCP/TFTP stack for discovery and inspection.

When **ironic** and **inspector** are operating in the same L2 network, there is a potential for the two DHCPs to race, which could result in a node being deployed by **ironic** being PXE booted by **inspector**.

To prevent DHCP races between the **inspector** DHCP and **ironic** DHCP, **inspector** has to be able to filter which nodes can get a DHCP lease from the **inspector** DHCP server. These filters can then be used to prevent nodes enrolled in **ironic** inventory from being PXE-booted unless they are explicitly moved into the **inspected** state.

Filter Interface

The contract between **inspector** and a PXE filter driver is described in the [*FilterDriver*](#) interface. The methods a driver has to implement are:

- `init_filter()` called on the service start to initialize internal driver state
- `sync()` called both periodically and when a node starts or finishes introspection to allow or deny its ports MAC addresses in the driver
- `tear_down_filter()` called on service exit to reset the internal driver state

The driver-specific configuration is suggested to be parsed during instantiation. There's also a convenience generic interface implementation [*BaseFilter*](#) that provides base locking and initialization implementation. If required, a driver can opt-out from the periodic synchronization by overriding the `get_periodic_sync_task()`.

4.1.7 Python API

[**ironic_inspector**](#)

[**ironic_inspector package**](#)

[**Subpackages**](#)

[**ironic_inspector.cmd package**](#)

[**Submodules**](#)

[**ironic_inspector.cmd.all module**](#)

The Ironic Inspector service.

```
ironic_inspector.cmd.all.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

[**ironic_inspector.cmd.conductor module**](#)

The Ironic Inspector Conductor service.

```
ironic_inspector.cmd.conductor.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

[**ironic_inspector.cmd.dbsync module**](#)

```
ironic_inspector.cmd.dbsync.add_alembic_command(subparsers, name)
```

```
ironic_inspector.cmd.dbsync.add_command_parsers(subparsers)
```

```
ironic_inspector.cmd.dbsync.do_alembic_command(config, cmd, *args, **kwargs)
```

```
ironic_inspector.cmd.dbsync.do_revision(config, cmd, *args, **kwargs)
```

```
ironic_inspector.cmd.dbsync.main(args=['-b', 'latex', 'doc/source', 'doc/build/pdf'])
```

```
ironic_inspector.cmd.dbsync.with_revision(config, cmd, *args, **kwargs)
```

ironic_inspector.cmd.migration module

Migrate introspected data between Swift and database.

```
class ironic_inspector.cmd.migration.MigrationTool
```

Bases: object

```
main()
```

```
ironic_inspector.cmd.migration.main()
```

ironic_inspector.cmd.status module

```
class ironic_inspector.cmd.status.Checks
```

Bases: UpgradeCommands

Upgrade checks for the ironic-status upgrade check command

Upgrade checks should be added as separate methods in this class and added to _upgrade_checks tuple.

```
ironic_inspector.cmd.status.main()
```

ironic_inspector.cmd.wsgi module

WSGI script for Ironic Inspector API, installed by pbr.

```
ironic_inspector.cmd.wsgi.initialize_wsgi_app()
```

Module contents

ironic_inspector.common package

Submodules

ironic_inspector.common.context module

```
class ironic_inspector.common.context.RequestContext(is_public_api=False, **kwargs)
```

Bases: RequestContext

Extends security contexts from the oslo.context library.

```
classmethod from_dict(values, **kwargs)
```

Construct a context object from a provided dictionary.

```
classmethod from_environ(environ, **kwargs)
```

Load a context object from a request environment.

If keyword arguments are provided then they override the values in the request environment.

Parameters

`environ (dict)` The environment dictionary associated with a request.

```
to_policy_values()
```

A dictionary of context attributes to enforce policy with.

oslo.policy enforcement requires a dictionary of attributes representing the current logged in user on which it applies policy enforcement. This dictionary defines a standard list of attributes that should be available for enforcement across services.

It is expected that services will often have to override this method with either deprecated values or additional attributes used by that service specific policy.

ironic_inspector.common.coordination module

```
class ironic_inspector.common.coordination.Coordinator(prefix=None)
```

Bases: object

Tooz coordination wrapper.

```
get_lock(uuid)
```

Get lock for node uuid.

```
get_members()
```

Get members in the service group.

```
group_name = b'ironic_inspector.service_group'
```

```
join_group()
```

Join service group.

```
leave_group()
```

Leave service group

```
lock_prefix = 'ironic_inspector.'
```

```
run_elect_coordinator()
```

Trigger a new leader election.

```
start(heartbeat=True)
```

Start coordinator.

Parameters

heartbeat Whether spawns a new thread to keep heartbeating with the tooz backend. Unless there is periodic task to do heartbeat manually, it should be always set to True.

```
stop()
```

Disconnect from coordination backend and stop heartbeat.

```
ironic_inspector.common.coordination.get_coordinator(prefix=None)
```

ironic_inspector.common.ironic module

```
exception ironic_inspector.common.ironic.NotFound(node_ident, code=404, *args, **kwargs)
```

Bases: [Error](#)

Node not found in Ironic.

`ironic_inspector.common.ironic.call_with_retries(func, *args, **kwargs)`

Call an ironic client function retrying all errors.

If an ironic client exception is raised, try calling the func again, at most 5 times, waiting 1 sec between each call. If on the 5th attempt the func raises again, the exception is propagated to the caller.

`ironic_inspector.common.ironic.capabilities_to_dict(caps)`

Convert the Nodes capabilities into a dictionary.

`ironic_inspector.common.ironic.check_provision_state(node)`

Sanity checks the provision state of the node.

Parameters

node An API client returned node object describing the baremetal node according to ironics node data model.

Returns

None if no action is to be taken, True if the power node state should not be modified.

Raises

Error on an invalid state being detected.

`ironic_inspector.common.ironic.dict_to_capabilities(caps_dict)`

Convert a dictionary into a string with the capabilities syntax.

`ironic_inspector.common.ironic.get_client(token=None)`

Get an ironic client connection.

`ironic_inspector.common.ironic.get_ipmi_address(node)`

Get the BMC address defined in node.driver_info dictionary

Possible names of BMC address value examined in order of list [ipmi_address] + CONF.ipmi_address_fields. The value could be an IP address or a hostname. DNS lookup performed for the first non empty value.

The first valid BMC address value returned along with its v4 and v6 IP addresses.

Parameters

node Node object with defined driver_info dictionary

Returns

tuple (ipmi_address, ipv4_address, ipv6_address)

`ironic_inspector.common.ironic.get_node(node_id, ironic=None, **kwargs)`

Get a node from Ironic.

Parameters

- **node_id** node UUID or name.
- **ironic** ironic client instance.
- **kwargs** arguments to pass to Ironic client.

Raises

Error on failure

```
ironic_inspector.common.ironic.lookup_node(macs=None, bmc_addresses=None,  
                                         introspection_data=None, ironic=None)
```

Lookup a node in the ironic database.

```
ironic_inspector.common.ironic.lookup_node_by_bmc_addresses(addresses, introspec-  
                                         tion_data=None,  
                                         ironic=None,  
                                         fail=False)
```

Find a node by its BMC address.

```
ironic_inspector.common.ironic.lookup_node_by_macs(macs, introspection_data=None,  
                                                 ironic=None, fail=False)
```

Find a node by its MACs.

```
ironic_inspector.common.ironic.reset_ironic_session()
```

Reset the global session variable.

Mostly useful for unit tests.

ironic_inspector.common.keystone module

```
ironic_inspector.common.keystone.add_auth_options(options, service_type)
```

```
ironic_inspector.common.keystone.get_adapter(group, **adapter_kwargs)
```

```
ironic_inspector.common.keystone.get_endpoint(group, **kwargs)
```

```
ironic_inspector.common.keystone.get_session(group)
```

```
ironic_inspector.common.keystone.register_auth_opts(group, service_type)
```

ironic_inspector.common.lldp_parsers module

Names and mapping functions used to map LLDP TLVs to name/value pairs

```
class ironic_inspector.common.lldp_parsers.LLDPBasicMgmtParser(nv=None)
```

Bases: [LLDPParser](#)

Class to handle parsing of 802.1AB Basic Management set

This class will also handle 802.1Q and 802.3 OUI TLVs.

```
add_capabilities(struct, name, data)
```

Handle LLDP_TLV_SYS_CAPABILITIES

```
add_mgmt_address(struct, name, data)
```

Handle LLDP_TLV_MGMT_ADDRESS

There can be multiple Mgmt Address TLVs, store in list.

```
handle_org_specific_tlv(struct, name, data)
```

Handle Organizationally Unique ID TLVs

This class supports 802.1Q and 802.3 OUI TLVs.

See <http://www.ieee802.org/1/pages/802.1Q-2014.html>, Annex D and <http://standards.ieee.org/about/get/802/802.3.html>

```
class ironic_inspector.common.lldp_parsers.LLDPParser(node_info, nv=None)
```

Bases: object

Base class to handle parsing of LLDP TLVs

Each class that inherits from this base class must provide a parser map. Parser maps are used to associate a LLDP TLV with a function handler and arguments necessary to parse the TLV and generate one or more name/value pairs. Each LLDP TLV maps to a tuple with the following fields:

function - handler function to generate name/value pairs

construct - name of construct definition for TLV

name - user-friendly name of TLV. For TLVs that generate only one name/value pair this is the name used

len_check - boolean indicating if length check should be done on construct

It's valid to have a function handler of None, this is for TLVs that are not mapped to a name/value pair(e.g.LLDP_TLV_TTL).

add_dot1_link_aggregation(*struct, name, data*)

Add name/value pairs for TLV Dot1_LinkAggregationId

This is in base class since it can be used by both dot1 and dot3.

add_nested_value(*struct, name, data*)

Add a single nested name/value pair to the dict

add_single_value(*struct, name, data*)

Add a single name/value pair to the nv dict

append_value(*name, value*)

Add value to a list mapped to name

parse_tlv(*tlv_type, data*)

Parse TLVs from mapping table

This functions takes the TLV type and the raw data for this TLV and gets a tuple from the parser_map. The construct field in the tuple contains the construct lib definition of the TLV which can be parsed to access individual fields. Once the TLV is parsed, the handler function for each TLV will store the individual fields as name/value pairs in nv_dict.

If the handler function does not exist, then no name/value pairs will be added to nv_dict, but since the TLV was handled, True will be returned.

Param

tlv_type - type identifier for TLV

Param

data - raw TLV value

Returns

True if TLV in parser_map and data is valid, otherwise False.

set_value(*name, value*)

Set name value pair in dictionary

The value for a name should not be changed if it exists.

```
class ironic_inspector.common.lldp_parsers.LLDPdot1Parser(node_info, nv=None)
```

Bases: [LLDPParser](#)

Class to handle parsing of 802.1Q TLVs

```
add_dot1_port_protocol_vlan(struct, name, data)
```

Handle dot1_PORT_PROTOCOL_VLANID

```
add_dot1_protocol_identities(struct, name, data)
```

Handle dot1_PROTOCOL_IDENTITY

There can be multiple protocol ids TLVs, store in list

```
add_dot1_vlans(struct, name, data)
```

Handle dot1_VLAN_NAME

There can be multiple vlan TLVs, add dictionary entry with id/vlan to list.

```
class ironic_inspector.common.lldp_parsers.LLDPdot3Parser(node_info, nv=None)
```

Bases: [LLDPParser](#)

Class to handle parsing of 802.3 TLVs

```
add_dot3_macphy_config(struct, name, data)
```

Handle dot3_MACPHY_CONFIG_STATUS

ironic_inspector.common.lldp_tlv module

Link Layer Discovery Protocol TLVs

```
ironic_inspector.common.lldp_tlv.bytes_to_int(obj)
```

Convert bytes to an integer

Param

obj - array of bytes

```
ironic_inspector.common.lldp_tlv.get_autoneg_cap(pmd)
```

Get autonegotiated capability strings

This returns a list of capability strings from the Physical Media Dependent (PMD) capability bits.

Parameters

pmd PMD bits

Returns

Sorted list containing capability strings

```
ironic_inspector.common.lldp_tlv.mapping_for_enum(mapping)
```

Return tuple used for keys as a dict

Param

mapping - dict with tuple as keys

```
ironic_inspector.common.lldp_tlv.mapping_for_switch(mapping)
```

Return dict from values

Param

mapping - dict with tuple as keys

ironic_inspector.common.locking module

```
class ironic_inspector.common.locking.BaseLock
    Bases: object

    abstract acquire(blocking=True)
        Acquire lock.

    abstract is_locked()
        Return lock status

    abstract release()
        Release lock.

class ironic_inspector.common.locking.InternalLock(uuid)
    Bases: BaseLock

    Locking mechanism based on threading.Semaphore.

    acquire(blocking=True)
        Acquire lock.

    is_locked()
        Return lock status

    release()
        Release lock.

class ironic_inspector.common.locking.ToozLock(lock)
    Bases: BaseLock

    Wrapper on tooz locks.

    acquire(blocking=True)
        Acquire lock.

    is_locked()
        Return lock status

    release()
        Release lock.

ironic_inspector.common.locking.get_lock(uuid)
```

ironic_inspector.common.rpc module

```
ironic_inspector.common.rpc.get_client(topic=None)
```

Get a RPC client instance.

Parameters

topic The topic of the message will be delivered to. This argument is ignored if CONF.standalone is True.

```
ironic_inspector.common.rpc.get_server(endpoints)
```

Get a RPC server instance.

```
ironic_inspector.common.rpc.init()
```

ironic_inspector.common.rpc_service module

```
class ironic_inspector.common.rpc_service.RPCService(host)
```

Bases: Service

start()

Start a service.

stop()

Stop a service.

Parameters

graceful indicates whether to wait for all threads to finish or terminate them instantly

ironic_inspector.common.service_utils module

```
ironic_inspector.common.service_utils.prepare_service(args=None)
```

ironic_inspector.common.swift module

```
class ironic_inspector.common.swift.SwiftAPI
```

Bases: object

API for communicating with Swift.

create_object(object, data, container=None, headers=None)

Uploads a given string to Swift.

Parameters

- **object** The name of the object in Swift
- **data** string data to put in the object
- **container** The name of the container for the object. Defaults to the value set in the configuration options.
- **headers** the headers for the object to pass to Swift

Returns

The Swift UUID of the object

Raises

utils.Error, if any operation with Swift fails.

get_object(object, container=None)

Downloads a given object from Swift.

Parameters

- **object** The name of the object in Swift
- **container** The name of the container for the object. Defaults to the value set in the configuration options.

Returns

Swift object

Raises

utils.Error, if the Swift operation fails.

`ironic_inspector.common.swift.get_introspection_data(uuid, suffix=None)`

Downloads introspection data from Swift.

Parameters

- **uuid** UUID of the Ironic node that the data came from
- **suffix** optional suffix to add to the underlying swift object name

Returns

Swift object with the introspection data

`ironic_inspector.common.swift.reset_swift_session()`

Reset the global session variable.

Mostly useful for unit tests.

`ironic_inspector.common.swift.store_introspection_data(data, uuid, suffix=None)`

Uploads introspection data to Swift.

Parameters

- **data** data to store in Swift
- **uuid** UUID of the Ironic node that the data came from
- **suffix** optional suffix to add to the underlying swift object name

Returns

name of the Swift object that the data is stored in

Module contents

[ironic_inspector.conductor package](#)

Submodules

[ironic_inspector.conductor.manager module](#)

`class ironic_inspector.conductor.manager.ConductorManager`

Bases: object

ironic inspector conductor manager

`RPC_API_VERSION = '1.3'`

`del_host()`

Shutdown the ironic inspector conductor service.

`do_abort(**kwargs)`

`do_continue(**kwargs)`

`do_introspection(**kwargs)`

`do_reapply(**kwargs)`

init_host()

 Initialize Worker host

 Init db connection, load and validate processing hooks, runs periodic tasks.

 :returns None

target = <Target version=1.3>

`ironic_inspector.conductor.manager.periodic_clean_up()`

`ironic_inspector.conductor.manager.periodic_leader_election(conductor)`

`ironic_inspector.conductor.manager.sync_with_ironic(conductor)`

Module contents

`ironic_inspector.conf` package

Submodules

`ironic_inspector.conf.accelerators` module

`ironic_inspector.conf.accelerators.list_opts()`

`ironic_inspector.conf.accelerators.register_opts(conf)`

`ironic_inspector.conf.capabilities` module

`ironic_inspector.conf.capabilities.list_opts()`

`ironic_inspector.conf.capabilities.register_opts(conf)`

`ironic_inspector.conf.coordination` module

`ironic_inspector.conf.coordination.list_opts()`

`ironic_inspector.conf.coordination.register_opts(conf)`

`ironic_inspector.conf.default` module

`class ironic_inspector.conf.default.Octal(min=None, max=None, type_name='integer value', choices=None)`

Bases: Integer

`ironic_inspector.conf.default.list_opts()`

`ironic_inspector.conf.default.register_opts(conf)`

`ironic_inspector.conf.discovery` module

`ironic_inspector.conf.discovery.list_opts()`

`ironic_inspector.conf.discovery.register_opts(conf)`

ironic_inspector.conf.dnsmasq_pxe_filter module

```
ironic_inspector.conf.dnsmasq_pxe_filter.list_opts()  
ironic_inspector.conf.dnsmasq_pxe_filter.register_opts(conf)
```

ironic_inspector.conf.extra_hardware module

```
ironic_inspector.conf.extra_hardware.list_opts()  
ironic_inspector.conf.extra_hardware.register_opts(conf)
```

ironic_inspector.conf.healthcheck module

```
ironic_inspector.conf.healthcheck.list_opts()  
ironic_inspector.conf.healthcheck.register_opts(conf)
```

ironic_inspector.conf.iptables module

```
ironic_inspector.conf.iptables.list_opts()  
ironic_inspector.conf.iptables.register_opts(conf)
```

ironic_inspector.conf.ironic module

```
ironic_inspector.conf.ironic.list_opts()  
ironic_inspector.conf.ironic.register_opts(conf)
```

ironic_inspector.conf.opts module

```
ironic_inspector.conf.opts.list_opts()  
ironic_inspector.conf.opts.parse_args(args, default_config_files=None)  
ironic_inspector.conf.opts.set_config_defaults()
```

Return a list of oslo.config options available in Inspector code.

```
ironic_inspector.conf.opts.set_cors_middleware_defaults()  
Update default configuration options for oslo.middleware.
```

ironic_inspector.conf.pci_devices module

```
ironic_inspector.conf.pci_devices.list_opts()  
ironic_inspector.conf.pci_devices.register_opts(conf)
```

ironic_inspector.conf.port_physnet module

```
ironic_inspector.conf.port_physnet.list_opts()  
ironic_inspector.conf.port_physnet.register_opts(conf)
```

ironic_inspector.conf.processing module

`ironic_inspector.conf.processing.list_opts()`

`ironic_inspector.conf.processing.register_opts(conf)`

ironic_inspector.conf.pxe_filter module

`ironic_inspector.conf.pxe_filter.list_opts()`

`ironic_inspector.conf.pxe_filter.register_opts(conf)`

ironic_inspector.conf.service_catalog module

`ironic_inspector.conf.service_catalog.list_opts()`

`ironic_inspector.conf.service_catalog.register_opts(conf)`

ironic_inspector.conf.swift module

`ironic_inspector.conf.swift.list_opts()`

`ironic_inspector.conf.swift.register_opts(conf)`

Module contents

ironic_inspector.db package

Submodules

ironic_inspector.db.api module

DB models API for inspection data and shared database code.

`ironic_inspector.db.api.add_node(uuid, state, started_at=None, finished_at=None, error=None, manage_boot=None)`

Add new node

Before creating new node with certain uuid clean ups all existing node info.

Parameters

- **uuid** node uuid
- **state** initial node state
- **started_at** node caching datetime
- **finished_at** introspection finished datetime
- **error** introspection error
- **manage_boot** whether to manage boot for this node

Returns

created node object

```
ironic_inspector.db.api.create_node(uuid, state, started_at=None, finished_at=None,  
                                     error=None, manage_boot=None)
```

Create new node

Parameters

- **uuid** node uuid
- **state** initial node state
- **started_at** node caching datetime
- **finished_at** introspection finished datetime
- **error** introspection error

Returns

created node object

```
ironic_inspector.db.api.create_rule(uuid, conditions, actions, description=None,  
                                     scope=None)
```

Create new rule

Parameters

- **uuid** rule uuid
- **conditions** list of (field, op, multiple, invert, params) tuple, which represents condition object
- **actions** list of (action, params) pair, which represents action object
- **description** rule description
- **scope** rule scope

Returns

created rule

```
ironic_inspector.db.api.delete_all_rules()
```

Delete all rules

Returns

None

```
ironic_inspector.db.api.delete_attributes(uuid)
```

Delete all attributes

Parameters

uuid the UUID of the node whose attributes you wish to delete

Returns

None

```
ironic_inspector.db.api.delete_node(uuid)
```

Delete node and its attributes

Parameters

uuid node uuid

Returns

None

`ironic_inspector.db.api.delete_nodes(finished_until=None)`

Delete all nodes

Parameters

finished_until datetime object, delete nodes are introspected before finished_until time

Returns

None

`ironic_inspector.db.api.delete_options(**filters)`

Delete all options

Parameters

filters deletion filter criteria

Returns

None

`ironic_inspector.db.api.delete_rule(uuid)`

Delete the rule by uuid

Parameters

uuid rule uuid

Raises

RuleNotFoundError in case rule not found

Returns

None

`ironic_inspector.db.api.get_active_nodes(started_before=None)`

Get list of nodes on introspection

Parameters

started_before datetime object, returns nodes, started before provided time

Returns

list of nodes, could be empty

`ironic_inspector.db.api.get_attributes(order_by=None, **fields)`

Get all attributes

Parameters

- **order_by** ordering criterion
- **fields** filter criteria fields

Returns

list of attributes

`ironic_inspector.db.api.get_introspection_data(node_id, processed=True)`

Get introspection data for this node.

Parameters

- **node_id** node UUID.
- **processed** Specify the type of introspected data, set to False indicates retrieving the unprocessed data.

Returns

A dictionary representation of introspected data

`ironic_inspector.db.api.get_node(uuid, **fields)`

Get all cached nodes

Parameters

- **uuid** node uuid
- **fields** fields are used as filtering criterion

Returns

get node object

Raises

`NodeNotFoundInDBError` in case node not found or node version differ from passed in fields.

`ironic_inspector.db.api.get_nodes()`

Get list of cached nodes

Returns

list of nodes, could be empty

`ironic_inspector.db.api.get_options(**fields)`

Get all options

Parameters

fields filter criteria fields

Returns

list of options

`ironic_inspector.db.api.get_rule(uuid)`

Get rule by uuid

Parameters

uuid rule uuid

Returns

rule object

`ironic_inspector.db.api.get_rules(**fields)`

List all rules.

`ironic_inspector.db.api.get_rules_actions(**fields)`

Get all rule actions

Parameters

fields field filter criteria

Returns

list of actions

`ironic_inspector.db.api.get_rules_conditions(**fields)`

Get all rule conditions

Parameters

fields field filter criteria

Returns

list of conditions

`ironic_inspector.db.api.get_writer_session()`

Help method to get writer session.

Returns

The writer session.

`ironic_inspector.db.api.init()`

Initialize the database.

Method called on service start up, initialize transaction context manager and try to create db session.

`ironic_inspector.db.api.list_nodes_by_attributes(attributes)`

Get list of nodes with certain attributes

Parameters

attributes list of attributes as (name, value) pair

Returns

list of nodes, could be empty

`ironic_inspector.db.api.list_nodes_options_by_uuid(uuid)`

Get list of node options

Parameters

uuid node uuid

Returns

list of node options, could be empty

`ironic_inspector.db.api.model_query(model, *args, **kwargs)`

Query helper for simpler session usage.

Parameters

session if present, the session to use

`ironic_inspector.db.api.session_for_read()`

Create read session within context manager

`ironic_inspector.db.api.session_for_write()`

Create write session within context manager

`ironic_inspector.db.api.set_attribute(node_uuid, name, values)`

Set lookup attributes for node

Parameters

- **node_uuid** node uuid
- **name** option name
- **values** list of attribute values

Returns

None

`ironic_inspector.db.api.set_option(node_uuid, name, value)`

Set option for node

Parameters

- **node_uuid** node uuid
- **name** option name
- **value** option value

Returns

None

`ironic_inspector.db.api.store_introspection_data(node_id, introspection_data, processed=True)`

Store introspection data for this node.

Parameters

- **node_id** node UUID.
- **introspection_data** A dictionary of introspection data
- **processed** Specify the type of introspected data, set to False indicates the data is unprocessed.

`ironic_inspector.db.api.update_node(uuid, **values)`

Update node by uuid

Updates node fields with provided values, also bump node version.

Parameters

- **uuid** node uuid
- **values** node fields with values to be updated

Raises

`NodeNotFoundInDBError` in case node not found or node version differ from passed in values.

[ironic_inspector.db.migration module](#)

`ironic_inspector.db.migration.create_schema(config=None, engine=None)`

Create database schema from models description.

Can be used for initial installation instead of `upgrade(head)`.

`ironic_inspector.db.migration.downgrade(revision, config=None)`

Used for downgrading database.

Parameters

- **version (string)** Desired database version

`ironic_inspector.db.migration.revision(message=None, autogenerate=False, config=None)`

Creates template for migration.

Parameters

- **message (string)** Text that will be used for migration title

- **autogenerate** (*bool*) If True - generates diff based on current database state

`ironic_inspector.db.migration.stamp(revision, config=None)`

Stamps database with provided revision.

Dont run any migrations.

Parameters

revision (*string*) Should match one from repository or head - to stamp database with most recent revision

`ironic_inspector.db.migration.upgrade(revision, config=None)`

Used for upgrading database.

Parameters

version (*string*) Desired database version

`ironic_inspector.db.migration.version(config=None, engine=None)`

Current database version.

Returns

Database version

Return type

string

ironic_inspector.db.model module

SQLAlchemy models for inspection data and shared database code.

`class ironic_inspector.db.model.Attribute(**kwargs)`

Bases: Base

name

node_uuid

uuid

value

`class ironic_inspector.db.model.IntrospectionData(**kwargs)`

Bases: Base

data

processed

uuid

`class ironic_inspector.db.model.ModelBase`

Bases: ModelBase

`class ironic_inspector.db.model.Node(**kwargs)`

Bases: Base

error

```
finished_at
manage_boot
started_at
state
uuid
version_id

class ironic_inspector.db.model.Option(**kwargs)
Bases: Base
name
uuid
value

class ironic_inspector.db.model.Rule(**kwargs)
Bases: Base
actions
conditions
created_at
description
disabled
scope
uuid

class ironic_inspector.db.model.RuleAction(**kwargs)
Bases: Base
action
as_dict()
id
params
rule

class ironic_inspector.db.model.RuleCondition(**kwargs)
Bases: Base
as_dict()
field
```

```
id
invert
multiple
op
params
rule
```

Module contents

ironic_inspector.plugins package

Submodules

ironic_inspector.plugins.accel_device module

Gather and distinguish Accelerator PCI devices from inventory.

class `ironic_inspector.plugins.accel_device.AccelDevicesHook`

Bases: `ProcessingHook`

Processing hook for distinguishing accelerator devices.

before_update(*introspection_data*, *node_info*, `**kwargs`)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.base module

Base code for plugins support.

class `ironic_inspector.plugins.base.ProcessingHook`

Bases: `object`

Abstract base class for introspection data processing hooks.

before_processing(*introspection_data*, `**kwargs`)

Hook to run before any other data processing.

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns

nothing.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

dependencies = []

An ordered list of hooks that must be enabled before this one.

The items here should be entry point names, not classes.

class ironic_inspector.plugins.base.RuleActionPlugin

Bases: *WithValidation*

Abstract base class for rule action plugins.

FORMATTED_PARAMS = []

List of params will be formatted with python format.

abstract apply(*node_info*, *params*, ***kwargs*)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

class ironic_inspector.plugins.base.RuleConditionPlugin

Bases: *WithValidation*

Abstract base class for rule condition plugins.

ALLOW_NONE = False

Whether this condition accepts None when field is not found.

REQUIRED_PARAMS = {'value'}

Set with names of required parameters.

abstract check(node_info, field, params, **kwargs)

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

class ironic_inspector.plugins.base.WithValidation

Bases: object

OPTIONAL_PARAMS = {}

Set with names of optional parameters.

REQUIRED_PARAMS = {}

Set with names of required parameters.

validate(params, **kwargs)

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on validation failure

ironic_inspector.plugins.base.introspection_data_manager()

ironic_inspector.plugins.base.missing_entrypoints_callback(names)

Raise MissingHookError with comma-separated list of missing hooks

ironic_inspector.plugins.base.node_not_found_hook_manager(*args)

`ironic_inspector.plugins.base.processing_hooks_manager(*args)`

Create a Stevedore extension manager for processing hooks.

Parameters

`args` arguments to pass to the hooks constructor.

`ironic_inspector.plugins.base.reset()`

Reset cached managers.

`ironic_inspector.plugins.base.rule_actions_manager()`

Create a Stevedore extension manager for actions in rules.

`ironic_inspector.plugins.base.rule_conditions_manager()`

Create a Stevedore extension manager for conditions in rules.

`ironic_inspector.plugins.base.validate_processing_hooks()`

Validate the enabled processing hooks.

Raises

`MissingHookError` on missing or failed to load hooks

Raises

`RuntimeError` on validation failure

Returns

the list of hooks passed validation

`ironic_inspector.plugins.base_physnet module`

`class ironic_inspector.plugins.base_physnet.BasePhysnetHook`

Bases: `ProcessingHook`

Base class for plugins that assign a physical network to ports.

The mechanism for mapping a port to a physical network should be provided by a subclass via the `get_physnet()` method.

`before_update(introspection_data, node_info, **kwargs)`

Process introspection data and patch port physical network.

`abstract get_physnet(port, iface_name, introspection_data)`

Return a physical network to apply to a port.

Subclasses should implement this method to determine how to map a port to a physical network.

Parameters

- `port` The ironic port to patch.
- `iface_name` Name of the interface.
- `introspection_data` Introspection data.

Returns

The physical network to set, or None.

ironic_inspector.plugins.capabilities module

Gather capabilities from inventory.

class `ironic_inspector.plugins.capabilities.CapabilitiesHook`

Bases: `ProcessingHook`

Processing hook for detecting capabilities.

before_update(*introspection_data*, *node_info*, `**kwargs`)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.discovery module

Enroll node not found hook hook.

`ironic_inspector.plugins.discovery.enroll_node_not_found_hook`(*introspection_data*, `**kwargs`)

ironic_inspector.plugins.example module

Example plugin.

class `ironic_inspector.plugins.example.ExampleProcessingHook`

Bases: `ProcessingHook`

before_processing(*introspection_data*, `**kwargs`)

Hook to run before any other data processing.

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns

nothing.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

class ironic_inspector.plugins.example.ExampleRuleAction

Bases: *RuleActionPlugin*

apply(*node_info*, *params*, ***kwargs*)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

ironic_inspector.plugins.example.example_not_found_hook(*introspection_data*, ***kwargs*)**ironic_inspector.plugins.extra_hardware module**

Plugin to store extra hardware information in Swift.

Stores the value of the data key returned by the ramdisk as a JSON encoded string in a Swift object. The object is named extra.hardware-<node uuid> and is stored in the inspector container.

class ironic_inspector.plugins.extra_hardware.ExtraHardwareHook

Bases: *ProcessingHook*

Processing hook for saving extra hardware information in Swift.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Stores the data key from introspection_data in Swift.

If the data key exists, updates Ironic extra column hardware_swift_object key to the name of the Swift object, and stores the data in the inspector container in Swift.

Otherwise, it does nothing.

[ironic_inspector.plugins.introspection_data module](#)

Backends for storing introspection data.

class ironic_inspector.plugins.introspection_data.BaseStorageBackend

Bases: object

abstract get(node_uuid, processed=True, get_json=False)

Get introspected data from storage backend.

Parameters

- **node_uuid** node UUID.
- **processed** Specify whether the data to be retrieved is processed or not.
- **get_json** Specify whether return the introspection data in json format, string value is returned if False.

Returns

the introspection data.

Raises

IntrospectionDataStoreDisabled if storage backend is disabled.

abstract save(node_uuid, data, processed=True)

Save introspected data to storage backend.

Parameters

- **node_uuid** node UUID.
- **data** the introspected data to be saved, in dict format.
- **processed** Specify whether the data to be saved is processed or not.

Raises

IntrospectionDataStoreDisabled if storage backend is disabled.

class ironic_inspector.plugins.introspection_data.DatabaseStore

Bases: object

get(node_uuid, processed=True, get_json=False)

save(node_uuid, data, processed=True)

class ironic_inspector.plugins.introspection_data.NoStore

Bases: [BaseStorageBackend](#)

get(node_uuid, processed=True, get_json=False)

Get introspected data from storage backend.

Parameters

- **node_uuid** node UUID.
- **processed** Specify whether the data to be retrieved is processed or not.
- **get_json** Specify whether return the introspection data in json format, string value is returned if False.

Returns

the introspection data.

Raises

IntrospectionDataStoreDisabled if storage backend is disabled.

save(node_uuid, data, processed=True)

Save introspected data to storage backend.

Parameters

- **node_uuid** node UUID.
- **data** the introspected data to be saved, in dict format.
- **processed** Specify whether the data to be saved is processed or not.

Raises

IntrospectionDataStoreDisabled if storage backend is disabled.

class ironic_inspector.plugins.introspection_data.SwiftStore

Bases: object

get(node_uuid, processed=True, get_json=False)

save(node_uuid, data, processed=True)

ironic_inspector.plugins.lldp_basic module

LLDP Processing Hook for basic TLVs

class ironic_inspector.plugins.lldp_basic.LLDPBasicProcessingHook

Bases: *ProcessingHook*

Process mandatory and optional LLDP packet fields

Loop through raw LLDP TLVs and parse those from the basic management, 802.1, and 802.3 TLV sets. Store parsed data back to the ironic-inspector database.

before_update(introspection_data, node_info, **kwargs)

Process LLDP data and update all_interfaces with processed data

ironic_inspector.plugins.local_link_connection module

Generic LLDP Processing Hook

class

ironic_inspector.plugins.local_link_connection.GenericLocalLinkConnectionHook

Bases: *ProcessingHook*

Process mandatory LLDP packet fields

Non-vendor specific LLDP packet fields processed for each NIC found for a baremetal node, port ID and chassis ID. These fields if found and if valid will be saved into the local link connection info port id and switch id fields on the Ironic port that represents that NIC.

before_update(introspection_data, node_info, **kwargs)

Process LLDP data and patch Ironic port local link connection

ironic_inspector.plugins.pci_devices module

Gather and distinguish PCI devices from inventory.

class ironic_inspector.plugins.pci_devices.PciDevicesHook

Bases: *ProcessingHook*

Processing hook for counting and distinguishing various PCI devices.

That information can be later used by nova for node scheduling.

aliases = {}

before_update(introspection_data, node_info, **kwargs)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.physnet_cidr_map module

Port Physical Network Hook

class ironic_inspector.plugins.physnet_cidr_map.PhysnetCidrMapHook

Bases: *BasePhysnetHook*

Process port physical network

Set the physical_network field of baremetal ports based on a cidr to physical network mapping in the configuration.

get_physnet(port, iface_name, introspection_data)

Return a physical network to apply to a port.

Parameters

- **port** The ironic port to patch.
- **iface_name** Name of the interface.
- **introspection_data** Introspection data.

Returns

The physical network to set, or None.

ironic_inspector.plugins.raid_device module

Gather root device hint from recognized block devices.

class `ironic_inspector.plugins.raid_device.RaidDeviceDetection`

Bases: `ProcessingHook`

Processing hook for learning the root device after RAID creation.

The plugin can figure out the root device in 2 runs. First, it saves the discovered block device serials in node.extra. The second run will check the difference between the recently discovered block devices and the previously saved ones. After saving the root device in node.properties, it will delete the temporarily saved block device serials in node.extra.

This way, it helps to figure out the root device hint in cases when otherwise Ironic doesn't have enough information to do so. Such a usecase is DRAC RAID configuration where the BMC doesn't provide any useful information about the created RAID disks. Using this plugin immediately before and after creating the root RAID device will solve the issue of root device hints.

In cases where theres no RAID volume on the node, the standard plugin will fail due to the missing local_gb value. This plugin fakes the missing value, until its corrected during later runs. Note, that for this to work the plugin needs to take precedence over the standard plugin.

before_processing(*introspection_data*, ***kwargs*)

Adds fake local_gb value if its missing from introspection_data.

before_update(*introspection_data*, *node_info*, ***kwargs*)

Hook to run before Ironic node update.

This hook is run after node is found and ports are created, just before the node is updated with the data.

Parameters

- **introspection_data** processed data from the ramdisk.
- **node_info** NodeInfo instance.
- **kwargs** used for extensibility without breaking existing hooks.

Returns

nothing.

[RFC 6902] - <http://tools.ietf.org/html/rfc6902>

ironic_inspector.plugins.rules module

Standard plugins for rules API.

class `ironic_inspector.plugins.rules.AddTraitAction`

Bases: `RuleActionPlugin`

REQUIRED_PARAMS = {'name'}

Set with names of required parameters.

apply(*node_info*, *params*, ***kwargs*)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
class ironic_inspector.plugins.rules.ContainsCondition
```

Bases: *ReCondition*

```
check(node_info, field, params, **kwargs)
```

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

```
class ironic_inspector.plugins.rules.EmptyCondition
```

Bases: *RuleConditionPlugin*

ALLOW_NONE = True

Whether this condition accepts None when field is not found.

REQUIRED_PARAMS = {}

Set with names of required parameters.

```
check(node_info, field, params, **kwargs)
```

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

```
class ironic_inspector.plugins.rules.EqCondition
    Bases: SimpleCondition

    op(b, /)
        Same as a == b.

class ironic_inspector.plugins.rules.ExtendAttributeAction
    Bases: RuleActionPlugin

    FORMATTED_PARAMS = ['value']
        List of params will be formatted with python format.

    OPTIONAL_PARAMS = {'unique'}
        Set with names of optional parameters.

    REQUIRED_PARAMS = {'path', 'value'}
        Set with names of required parameters.

    apply(node_info, params, **kwargs)
        Run action on successful rule match.

    Parameters
        • node_info NodeInfo object
        • params parameters as a dictionary
        • kwargs used for extensibility without breaking existing plugins

    Raises
        utils.Error on failure

class ironic_inspector.plugins.rules.FailAction
    Bases: RuleActionPlugin

    REQUIRED_PARAMS = {'message'}
        Set with names of required parameters.

    apply(node_info, params, **kwargs)
        Run action on successful rule match.

    Parameters
        • node_info NodeInfo object
        • params parameters as a dictionary
        • kwargs used for extensibility without breaking existing plugins

    Raises
        utils.Error on failure

class ironic_inspector.plugins.rules.GeCondition
    Bases: SimpleCondition

    op(b, /)
        Same as a >= b.
```

```
class ironic_inspector.plugins.rules.GtCondition
```

Bases: *SimpleCondition*

op(*b*, /)

Same as *a* > *b*.

```
class ironic_inspector.plugins.rules.LeCondition
```

Bases: *SimpleCondition*

op(*b*, /)

Same as *a* <= *b*.

```
class ironic_inspector.plugins.rules.LtCondition
```

Bases: *SimpleCondition*

op(*b*, /)

Same as *a* < *b*.

```
class ironic_inspector.plugins.rules.MatchesCondition
```

Bases: *ReCondition*

check(*node_info*, *field*, *params*, ***kwargs*)

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

```
class ironic_inspector.plugins.rules.NeCondition
```

Bases: *SimpleCondition*

op(*b*, /)

Same as *a* != *b*.

```
class ironic_inspector.plugins.rules.NetCondition
```

Bases: *RuleConditionPlugin*

check(*node_info*, *field*, *params*, ***kwargs*)

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value

- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

validate(params, **kwargs)

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on validation failure

class ironic_inspector.plugins.rules.ReCondition

Bases: *RuleConditionPlugin*

validate(params, **kwargs)

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on validation failure

class ironic_inspector.plugins.rules.RemoveTraitAction

Bases: *RuleActionPlugin*

REQUIRED_PARAMS = {'name'}

Set with names of required parameters.

apply(node_info, params, **kwargs)

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
class ironic_inspector.plugins.rules.SetAttributeAction
```

Bases: *RuleActionPlugin*

FORMATTED_PARAMS = ['value']

List of params will be formatted with python format.

OPTIONAL_PARAMS = {'reset_interfaces', 'value'}

Set with names of optional parameters.

REQUIRED_PARAMS = {'path'}

Set with names of required parameters.

```
apply(node_info, params, **kwargs)
```

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
validate(params, **kwargs)
```

Validate params passed during creation.

Default implementation checks for presence of fields from REQUIRED_PARAMS and fails for unexpected fields (not from REQUIRED_PARAMS + OPTIONAL_PARAMS).

Parameters

- **params** params as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on validation failure

```
class ironic_inspector.plugins.rules.SetCapabilityAction
```

Bases: *RuleActionPlugin*

FORMATTED_PARAMS = ['value']

List of params will be formatted with python format.

OPTIONAL_PARAMS = {'value'}

Set with names of optional parameters.

REQUIRED_PARAMS = {'name'}

Set with names of required parameters.

```
apply(node_info, params, **kwargs)
```

Run action on successful rule match.

Parameters

- **node_info** NodeInfo object
- **params** parameters as a dictionary
- **kwargs** used for extensibility without breaking existing plugins

Raises

utils.Error on failure

```
class ironic_inspector.plugins.rules.SimpleCondition
```

Bases: *RuleConditionPlugin*

```
check(node_info, field, params, **kwargs)
```

Check if condition holds for a given field.

Parameters

- **node_info** NodeInfo object
- **field** field value
- **params** parameters as a dictionary, changing it here will change what will be stored in database
- **kwargs** used for extensibility without breaking existing plugins

Raises

ValueError on unacceptable field value

Returns

True if check succeeded, otherwise False

```
op = None
```

```
ironic_inspector.plugins.rules.coerce(value, expected)
```

ironic_inspector.plugins.standard module

Standard set of plugins.

```
class ironic_inspector.plugins.standard.RamdiskErrorHook
```

Bases: *ProcessingHook*

Hook to process error send from the ramdisk.

```
before_processing(introspection_data, **kwargs)
```

Hook to run before any other data processing.

This hook is run even before sanity checks.

Parameters

- **introspection_data** raw information sent by the ramdisk, may be modified by the hook.
- **kwargs** used for extensibility without breaking existing hooks

Returns

nothing.

```
class ironic_inspector.plugins.standard.RootDiskSelectionHook
```

Bases: *ProcessingHook*

Smarter root disk selection using Ironic root device hints.

This hook must always go before SchedulerHook, otherwise root_disk field might not be updated.

```
before_update(introspection_data, node_info, **kwargs)
```

Process root disk information.

```
class ironic_inspector.plugins.standard.SchedulerHook
```

Bases: *ProcessingHook*

Nova scheduler required properties.

```
KEYS = ('cpus', 'cpu_arch', 'memory_mb')
```

```
before_update(introspection_data, node_info, **kwargs)
```

Update node with scheduler properties.

```
class ironic_inspector.plugins.standard.ValidateInterfacesHook
```

Bases: *ProcessingHook*

Hook to validate network interfaces.

```
before_processing(introspection_data, **kwargs)
```

Validate information about network interfaces.

```
before_update(introspection_data, node_info, **kwargs)
```

Create new ports and drop ports that are not present in the data.

Module contents

[ironic_inspector.pxe_filter package](#)

Submodules

[ironic_inspector.pxe_filter.base module](#)

Base code for PXE boot filtering.

```
class ironic_inspector.pxe_filter.base.BaseFilter
```

Bases: *FilterDriver*

The generic PXE boot filtering interface implementation.

This driver doesnt do anything but provides a basic synchronization and initialization logic for some drivers to reuse. Subclasses have to provide a custom sync() method.

```
fsm = <automaton.machines.FiniteMachine object>
```

```
fsm_reset_on_error()
```

Reset the filter driver upon generic exception.

The context is self.fsm. The automaton.exceptions.NotFound error is cast to the InvalidFilterDriverState error. Other exceptions trigger self.reset()

Raises

 InvalidFilterDriverState

Returns

 nothing.

get_periodic_sync_task()

Get periodic sync task for the filter.

The periodic task returned is casting the InvalidFilterDriverState to the periodics.NeverAgain exception to quit looping.

Raises

 periodics.NeverAgain

Returns

 a periodic task to be run in the background.

init_filter()

Base driver initialization logic. Locked.

Raises

 InvalidFilterDriverState

Returns

 nothing.

reset()

Reset internal driver state.

This method is called by the fsm_context manager upon exception as well as by the tear_down_filter method. A subclass might wish to override as necessary, though must not lock the driver. The overriding subclass should up-call.

Returns

 nothing.

property state

Current driver state.

sync(*ironic*)

Base driver sync logic. Locked.

Parameters

ironic obligatory ironic client instance

Returns

 nothing.

tear_down_filter()

Base driver tear down logic. Locked.

Returns

 nothing.

class ironic_inspector.pxe_filter.base.Events

Bases: object

PXE filter driver transitions.

```
initialize = 'initialize'
reset = 'reset'
sync = 'sync'

exception ironic_inspector.pxe_filter.base.InvalidFilterDriverState
    Bases: RuntimeError
        The fsm of the filter driver raised an error.

class ironic_inspector.pxe_filter.base.NoopFilter
    Bases: BaseFilter
        A trivial PXE boot filter.

    get_periodic_sync_task()
        Get periodic sync task for the filter.
        The periodic task returned is casting the InvalidFilterDriverState to the periodics.NeverAgain exception to quit looping.

        Raises
            periodics.NeverAgain

        Returns
            a periodic task to be run in the background.

class ironic_inspector.pxe_filter.base.States
    Bases: object
        PXE filter driver states.

    initialized = 'initialized'
    uninitialized = 'uninitialized'

ironic_inspector.pxe_filter.base.driver()
    Get the driver for the PXE filter.

    Returns
        the singleton PXE filter driver object.

ironic_inspector.pxe_filter.base.get_active_macs(ironic)
ironic_inspector.pxe_filter.base.get_inactive_macs(ironic)
ironic_inspector.pxe_filter.base.get_ironic_macs(ironic)
ironic_inspector.pxe_filter.base.locked_driver_event(event)
    Call driver method having processed the fsm event.

ironic\_inspector.pxe\_filter.dnsmasq module

class ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter
    Bases: BaseFilter
        The dnsmasq PXE filter driver.
```

A pxe filter driver implementation that controls access to dnsmasq through amending its configuration.

init_filter()

Performs an initial sync with ironic and starts dnsmasq.

The initial _sync() call reduces the chances dnsmasq might lose some inotify deny list events by prefetching the list before dnsmasq is started.

Raises

OSError, IOError.

Returns

None.

reset()

Stop dnsmasq and upcall reset.

sync(*ironic*)

Sync dnsmasq configuration with current Ironic&Inspector state.

Polls all ironic ports. Those being inspected, the active ones, are added to the allow list while the rest are added to the deny list in the dnsmasq configuration.

Parameters

ironic an ironic client instance.

Raises

OSError, IOError.

Returns

None.

ironic_inspector.pxe_filter.interface module

The code of the PXE boot filtering interface.

class ironic_inspector.pxe_filter.interface.FilterDriver

Bases: object

The PXE boot filtering interface.

abstract get_periodic_sync_task()

Get periodic sync task for the filter.

Returns

a periodic task to be run in the background.

abstract init_filter()

Initialize the internal driver state.

This method should be idempotent and may perform system-wide filter state changes. Can be synchronous.

Returns

nothing.

abstract sync(*ironic*)

Synchronize the filter with ironic and inspector.

To be called both periodically and as needed by inspector. The filter should tear down its internal state if the sync method raises in order to propagate filtering exception between periodic and on-demand sync call. To this end, a driver should raise from the sync call if its internal state isn't properly initialized.

Parameters

ironic an ironic client instance.

Returns

nothing.

abstract tear_down_filter()

Reset the filter.

This method should be idempotent and may perform system-wide filter state changes. Can be synchronous.

Returns

nothing.

ironic_inspector.pxe_filter.iptables module

class ironic_inspector.pxe_filter.iptables.IptablesFilter

Bases: *BaseFilter*

A PXE boot filtering interface implementation.

init_filter()

Base driver initialization logic. Locked.

Raises

InvalidFilterDriverState

Returns

nothing.

reset()

Reset internal driver state.

This method is called by the fsm_context manager upon exception as well as by the tear_down_filter method. A subclass might wish to override as necessary, though must not lock the driver. The overriding subclass should up-call.

Returns

nothing.

sync(*ironic*)

Sync firewall filter rules for introspection.

Gives access to PXE boot port for any machine, except for those, whose MAC is registered in Ironic and is not on introspection right now.

This function is called from both introspection initialization code and from periodic task. This function is supposed to be resistant to unexpected iptables state.

`init()` function must be called once before any call to this function. This function is using eventlet semaphore to serialize access from different green threads.

Parameters

ironic an ironic client instance.

Returns

nothing.

Module contents

Submodules

ironic_inspector.api_tools module

Generic Rest Api tools.

`ironic_inspector.api_tools.limit_field(value)`

Fetch the pagination limit field from flask.request.args.

Returns

the limit

`ironic_inspector.api_tools.marker_field(value)`

Fetch the pagination marker field from flask.request.args.

Returns

an uuid

`ironic_inspector.api_tools.raises_coercion_exceptions(fn)`

Convert coercion function exceptions to utils.Error.

Raises

utils.Error when the coercion function raises an AssertionError or a ValueError

`ironic_inspector.api_tools.request_field(field_name)`

Decorate a function that coerces the specified field.

Parameters

field_name name of the field to fetch

Returns

a decorator

`ironic_inspector.api_tools.state_field(value)`

Fetch the pagination state field from flask.request.args.

Returns

list of the state(s)

ironic_inspector.introspect module

Handling introspection request.

`ironic_inspector.introspect.abort(node_id, token=None)`

Abort running introspection.

Parameters

- **node_id** node UUID or name
- **token** authentication token

Raises

Error

`ironic_inspector.introspect.introspect(node_id, manage_boot=True, token=None)`

Initiate hardware properties introspection for a given node.

Parameters

- **node_id** node UUID or name
- **manage_boot** whether to manage boot for this node
- **token** authentication token

Raises

Error

ironic_inspector.introspection_state module

Introspection state.

`class ironic_inspector.introspection_state.Events`

Bases: object

Events that change introspection state.

`abort = 'abort'`

`abort_end = 'abort_end'`

`classmethod all()`

Return a list of all events.

`error = 'error'`

`finish = 'finish'`

`process = 'process'`

`reapply = 'reapply'`

`start = 'start'`

`timeout = 'timeout'`

`wait = 'wait'`

`class ironic_inspector.introspection_state.States`

Bases: object

States of an introspection.

`aborting = 'aborting'`

`classmethod all()`

Return a list of all states.

```
enrolling = 'enrolling'  
error = 'error'  
finished = 'finished'  
processing = 'processing'  
reapplying = 'reapplying'  
starting = 'starting'  
waiting = 'waiting'
```

[ironic_inspector.main module](#)

```
ironic_inspector.main.add_version_headers(res)  
ironic_inspector.main.api(path, is_public_api=False, rule=None, verb_to_rule_map=None,  
                           **flask_kwargs)
```

Decorator to wrap api methods.

Performs flask routing, exception conversion, generation of oslo context for request and API access policy enforcement.

Parameters

- **path** flask app route path
- **is_public_api** whether this API path should be treated as public, with minimal access enforcement
- **rule** API access policy rule to enforce. If rule is None, the default policy rule will be enforced, which is deny all if not overridden in policy config file.
- **verb_to_rule_map** if both rule and this are given, defines mapping between http verbs (uppercase) and strings to format the rule string with
- **kwargs** all the rest kwargs are passed to flask app.route

```
ironic_inspector.main.api_continue()  
ironic_inspector.main.api_introspection(node_id)  
ironic_inspector.main.api_introspection_abort(node_id)  
ironic_inspector.main.api_introspection_data(node_id)  
ironic_inspector.main.api_introspection_reapply(node_id)  
ironic_inspector.main.api_introspection_statuses()  
ironic_inspector.main.api_introspection_unprocessed_data(node_id)  
ironic_inspector.main.api_root()  
ironic_inspector.main.api_rule(uuid)  
ironic_inspector.main.api_rules()
```

```
ironic_inspector.main.check_api_version()  
ironic_inspector.main.convert_exceptions(func)  
ironic_inspector.main.create_link_object(urls)  
ironic_inspector.main.error_response(exc, code=500)  
ironic_inspector.main.generate_introspection_status(node)
```

Return a dict representing current node status.

Parameters

node a NodeInfo instance

Returns

dictionary

```
ironic_inspector.main.generate_resource_data(resources)
```

```
ironic_inspector.main.get_app()
```

Get the flask instance.

```
ironic_inspector.main.get_client_compat()
```

```
ironic_inspector.main.get_random_topic()
```

```
ironic_inspector.main.handle_404(error)
```

```
ironic_inspector.main.rule_repr(rule, short)
```

```
ironic_inspector.main.start_coordinator()
```

Create a coordinator instance for non-standalone case.

```
ironic_inspector.main.version_root(version)
```

ironic_inspector.node_cache module

Cache for nodes currently under introspection.

```
class ironic_inspector.node_cache.NodeInfo(uuid, version_id=None, state=None,  
                                         started_at=None, finished_at=None,  
                                         error=None, node=None, ports=None,  
                                         ironic=None, manage_boot=True)
```

Bases: object

Record about a node in the cache.

This class optionally allows to acquire a lock on a node. Note that the class instance itself is NOT thread-safe, you need to create a new instance for every thread.

```
acquire_lock(blocking=True)
```

Acquire a lock on the associated node.

Exits with success if a lock is already acquired using this NodeInfo object.

Parameters

blocking if True, wait for lock to be acquired, otherwise return immediately.

Returns

boolean value, whether lock was acquired successfully

add_attribute(*name, value*)

Store look up attribute for a node in the database.

Parameters

- **name** attribute name
- **value** attribute value or list of possible values

add_trait(*trait, ironic=None*)

Add a trait to the node.

Parameters

- **trait** trait to add
- **ironic** Ironic client to use instead of self.ironic

property attributes

Node look up attributes as a dict.

commit()

Commit current node status into the database.

create_ports(*ports, ironic=None*)

Create one or several ports for this node.

Parameters

- **ports** List of ports with all their attributes e.g [{mac: xx, ip: xx, client_id: None}, {mac: xx, ip: None, client_id: None}] It also support the old style of list of macs. A warning is issued if port already exists on a node.
- **ironic** Ironic client to use instead of self.ironic

delete_port(*port, ironic=None*)

Delete port.

Parameters

- **port** port object or its MAC
- **ironic** Ironic client to use instead of self.ironic

finished(*event, error=None*)

Record status for this node and process a terminal transition.

Also deletes look up attributes from the cache.

Parameters

- **event** the event to process
- **error** error message

classmethod from_row(*row, ironic=None, node=None*)

Construct NodeInfo from a database row.

fsm_event(event, strict=False)

Update node_info.state based on a fsm.process_event(event) call.

An AutomatonException triggers an error event. If strict, node_info.finished(istate.Events.error, error=str(exc)) is called with the AutomatonException instance and a EventError raised.

Parameters

event an event to process by the fsm

Strict

whether to fail the introspection upon an invalid event

Raises

NodeStateInvalidEvent

get_by_path(path)

Get field value by ironic-style path (e.g. /extra/foo).

Parameters

path path to a field

Returns

field value

Raises

KeyError if field was not found

invalidate_cache()

Clear all cached info, so that its reloaded next time.

property ironic

Ironic client instance.

property manage_boot

Whether to manage boot for this node.

node(ironic=None)

Get Ironic node object associated with the cached node record.

property options

Node introspection options as a dict.

patch(patches, ironic=None, **kwargs)

Apply JSON patches to a node.

Refreshes cached node instance.

Parameters

- **patches** JSON patches to apply
- **ironic** Ironic client to use instead of self.ironic
- **kwargs** Arguments to pass to ironicclient.

Raises

openstacksdk exceptions

patch_port(*port, patches, ironic=None*)

Apply JSON patches to a port.

Parameters

- **port** port object or its MAC
- **patches** JSON patches to apply
- **ironic** Ironic client to use instead of self.ironic

ports(*ironic=None*)

Get Ironic port objects associated with the cached node record.

This value is cached as well, use invalidate_cache() to clean.

Returns

dict MAC -> port object

release_lock()

Release a lock on a node.

Does nothing if lock was not acquired using this NodeInfo object.

remove_trait(*trait, ironic=None*)

Remove a trait from the node.

Parameters

- **trait** trait to add
- **ironic** Ironic client to use instead of self.ironic

replace_field(*path, func, **kwargs*)

Replace a field on ironic node.

Parameters

- **path** path to a field as used by the ironic client
- **func** function accepting an old value and returning a new one
- **kwargs** if default value is passed here, it will be used when no existing value is found.

Raises

KeyError if value is not found and default is not set

Raises

everything that patch() may raise

set_option(*name, value*)

Set an option for a node.

property state

State of the node_info object.

update_capabilities(*ironic=None, **caps*)

Update capabilities on a node.

Parameters

- **caps** capabilities to update
- **ironic** Ironic client to use instead of self.ironic

update_properties(*ironic=None*, *props*)**

Update properties on a node.

Parameters

- **props** properties to update
- **ironic** Ironic client to use instead of self.ironic

property version_id

Deprecated - Get the version id

ironic_inspector.node_cache.active_macs()

List all MACs that are on introspection right now.

ironic_inspector.node_cache.add_node(*uuid*, *state*, *manage_boot=True*, *attributes*)**

Store information about a node under introspection.

All existing information about this node is dropped. Empty values are skipped.

Parameters

- **uuid** Ironic node UUID
- **state** The initial state of the node
- **manage_boot** whether to manage boot for this node
- **attributes** attributes known about this node (like macs, BMC etc); also ironic client instance may be passed under ironic

Returns

NodeInfo

ironic_inspector.node_cache.clean_up()

Clean up the cache.

Finish introspection for timed out nodes.

Returns

list of timed out node UUIDs

ironic_inspector.node_cache.create_node(*driver*, *ironic=None*, *attributes*)**

Create ironic node and cache it.

- Create new node in ironic.
- Cache it in inspector.
- Sets node_info state to enrolling.

Parameters

- **driver** driver for Ironic node.
- **ironic** ironic client instance.
- **attributes** dict, additional keyword arguments to pass to the ironic client on node creation.

Returns

NodeInfo, or None in case error happened.

ironic_inspector.node_cache.delete_nodes_not_in_list(uuids)

Delete nodes which dont exist in Ironic node UUIDs.

Parameters

uuids Ironic node UUIDs

ironic_inspector.node_cache.find_node(attributes)**

Find node in cache.

Looks up a node based on attributes in a best-match fashion. This function acquires a lock on a node.

Parameters

attributes attributes known about this node (like macs, BMC etc) also ironic client instance may be passed under ironic

Returns

structure NodeInfo with attributes `uuid` and `created_at`

Raises

Error if node is not found or multiple nodes match the attributes

ironic_inspector.node_cache.fsm_event_after(event, strict=False)

Trigger an fsm event after the function execution.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **event** the event to process after the function call
- **strict** make an invalid fsm event trigger an error event

ironic_inspector.node_cache.fsm_event_before(event, strict=False)

Trigger an fsm event before the function execution.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **event** the event to process before the function call
- **strict** make an invalid fsm event trigger an error event

ironic_inspector.node_cache.fsm_transition(event, reentrant=True, **exc_kwargs)

Decorate a function to perform a (non-)reentrant transition.

If True, reentrant transition will be performed at the end of a function call. If False, the transition will be performed before the function call. The function is decorated with the `triggers_fsm_error_transition` decorator as well.

Parameters

- **event** the event to bind the transition to.
- **reentrant** whether the transition is reentrant.
- **exc_kwargs** passed on to the `triggers_fsm_error_transition` decorator

`ironic_inspector.node_cache.get_introspection_data(node_id, processed=True)`

Get introspection data for this node.

Parameters

- **node_id** node UUID.
- **processed** Specify the type of introspected data, set to False indicates retrieving the unprocessed data.

Returns

A dictionary representation of intropsected data

`ironic_inspector.node_cache.get_node(node_id, ironic=None)`

Get node from cache.

Parameters

- **node_id** node UUID or name.
- **ironic** optional ironic client instance

Returns

structure NodeInfo.

`ironic_inspector.node_cache.get_node_list(ironic=None, marker=None, limit=None, state=None)`

Get node list from the cache.

The list of the nodes is ordered based on the (started_at, uuid) attribute pair, newer items first.

Parameters

- **ironic** optional ironic client instance
- **marker** pagination marker (an UUID or None)
- **limit** pagination limit; None for default CONF.api_max_limit
- **state** list of states for the filter; None for no state filter

Returns

a list of NodeInfo instances.

`ironic_inspector.node_cache.introspection_active()`

Check if introspection is active for at least one node.

`ironic_inspector.node_cache.record_node(ironic=None, bmc_addresses=None, macs=None)`

Create a cache record for a known active node.

Parameters

- **ironic** ironic client instance.
- **bmc_addresses** list of BMC addresses.
- **macs** list of MAC addresses.

Returns

NodeInfo

```
ironic_inspector.node_cache.release_lock(func)
```

Decorate a node_info-function to release the node_info lock.

Assumes the first parameter of the function func is always a NodeInfo instance.

```
ironic_inspector.node_cache.start_introspection(uuid, **kwargs)
```

Start the introspection of a node.

If a node_info record exists in the DB, a start transition is used rather than dropping the record in order to check for the start transition validity in particular node state.

Parameters

- **uuid** Ironic node UUID
- **kwargs** passed on to add_node()

Raises

NodeStateInvalidEvent in case the start transition is invalid in the current node state

Raises

NodeStateRaceCondition if a mismatch was detected between the node_info cache and the DB

Returns

NodeInfo

```
ironic_inspector.node_cache.store_introspection_data(node_id, introspection_data,  
processed=True)
```

Store introspection data for this node.

Parameters

- **node_id** node UUID.
- **introspection_data** A dictionary of introspection data
- **processed** Specify the type of introspected data, set to False indicates the data is unprocessed.

```
ironic_inspector.node_cache.triggers_fsm_error_transition(errors=(<class  
'Exception'>, ),  
no_errors=(<class  
'ironic_inspector.utils.NodeStateInvalidEvent'  
<class  
'ironic_inspector.utils.NodeStateRaceCondition'
```

Trigger an fsm error transition upon certain errors.

It is assumed the first function arg of the decorated function is always a NodeInfo instance.

Parameters

- **errors** a tuple of exceptions upon which an error event is triggered. Re-raised.
- **no_errors** a tuple of exceptions that wont trigger the error event.

[ironic_inspector.policy module](#)

`ironic_inspector.policy.authorize(rule, target, creds, *args, **kwargs)`

A shortcut for policy.Enforcer.authorize()

Checks authorization of a rule against the target and credentials, and raises an exception if the rule is not defined. args and kwargs are passed directly to oslo.policy Enforcer.authorize Always returns True if CONF.auth_strategy != keystone.

Parameters

- **rule** name of a registered oslo.policy rule
- **target** dict-like structure to check rule against
- **creds** dict of policy values from request

Returns

True if request is authorized against given policy, False otherwise

Raises

`oslo_policy.policy.PolicyNotRegistered` if supplied policy is not registered in `oslo_policy`

`ironic_inspector.policy.get_enforcer()`

Provides access to the single instance of Policy enforcer.

`ironic_inspector.policy.get_oslo_policy_enforcer()`

Get the enforcer instance to generate policy files.

This method is for use by oslopolicy CLI scripts. Those scripts need the output-file and namespace options, but having those in sys.argv means loading the inspector config options will fail as those are not expected to be present. So we pass in an arg list with those stripped out.

`ironic_inspector.policy.init_enforcer(policy_file=None, rules=None, default_rule=None, use_conf=True)`

Synchronously initializes the policy enforcer

Parameters

- **policy_file** Custom policy file to use, if none is specified, `CONF.oslo_policy.policy_file` will be used.
- **rules** Default dictionary / Rules to use. It will be considered just in the first instantiation.
- **default_rule** Default rule to use, `CONF.oslo_policy.policy_default_rule` will be used if none is specified.
- **use_conf** Whether to load rules from config file.

`ironic_inspector.policy.list_policies()`

Get list of all policies defined in code.

Used to register them all at runtime, and by oslo-config-generator to generate sample policy files.

ironic_inspector.process module

Handling introspection data from the ramdisk.

`ironic_inspector.process.get_introspection_data(uuid, processed=True, get_json=False)`

Get introspection data from the storage backend.

Parameters

- **uuid** node UUID
- **processed** Indicates the type of introspection data to be read, set True to request processed introspection data.
- **get_json** Specify whether return the introspection data in json format, string value is returned if False.

Raises

utils.Error

`ironic_inspector.process.process(introspection_data)`

Process data from the ramdisk.

This function heavily relies on the hooks to do the actual data processing.

`ironic_inspector.process.reapply(node_uuid, data=None)`

Re-apply introspection steps.

Re-apply preprocessing, postprocessing and introspection rules on stored data.

Parameters

- **node_uuid** node UUID
- **data** unprocessed introspection data to be reapplied

Raises

utils.Error

`ironic_inspector.process.store_introspection_data(node_uuid, data, processed=True)`

Store introspection data to the storage backend.

Parameters

- **node_uuid** node UUID
- **data** Introspection data to be saved
- **processed** The type of introspection data, set to True means the introspection data is processed, otherwise unprocessed.

Raises

utils.Error

ironic_inspector.rules module

Support for introspection rules.

`class ironic_inspector.rules.IntrospectionRule(uuid, conditions, actions, description, scope=None)`

Bases: `object`

High-level class representing an introspection rule.

apply_actions(*node_info*, *data*=*None*)

Run actions on a node.

Parameters

- **node_info** `NodeInfo` instance
- **data** introspection data

as_dict(*short*=*False*)

check_conditions(*node_info*, *data*)

Check if conditions are true for a given node.

Parameters

- **node_info** a `NodeInfo` object
- **data** introspection data

Returns

True if conditions match, otherwise False

check_scope(*node_info*)

Check if nodes scope falls under rule._scope and rule is applicable

Parameters

node_info a `NodeInfo` object

Returns

True if conditions match, otherwise False

property `description`

`ironic_inspector.rules.actions_schema()`

`ironic_inspector.rules.apply(node_info, data)`

Apply rules to a node.

`ironic_inspector.rules.conditions_schema()`

`ironic_inspector.rules.create(conditions_json, actions_json, uuid=None, description=None, scope=None)`

Create a new rule in database.

Parameters

- **conditions_json** list of dicts with the following keys:
 - * **op** - operator
 - JSON path to field to compare Other keys are stored as is.
- **actions_json** list of dicts with the following keys:
 - * **action** - action type
 - Other keys are stored as is.
- **uuid** rule UUID, will be generated if empty
- **description** human-readable rule description

- **scope** if scope on node and rule matches, rule applies; if its empty, rule applies to all nodes.

Returns

new IntrospectionRule object

Raises

utils.Error on failure

`ironic_inspector.rules.delete(uuid)`

Delete a rule by its UUID.

`ironic_inspector.rules.delete_all()`

Delete all rules.

`ironic_inspector.rules.get(uuid)`

Get a rule by its UUID.

`ironic_inspector.rules.get_all()`

List all rules.

ironic_inspector.utils module

`class ironic_inspector.utils.DeferredBasicAuthMiddleware(app, auth_file)`

Bases: object

Middleware which sets X-Identity-Status header based on authentication

`exception ironic_inspector.utils.Error(msg, code=400, log_level='error', **kwargs)`

Bases: Exception

Inspector exception.

`exception ironic_inspector.utils.IntrospectionDataNotFound(msg, code=404, **kwargs)`

Bases: `NotFoundInCacheError`

Introspection data not found.

`exception ironic_inspector.utils.IntrospectionDataStoreDisabled(msg, code=400, log_level='error', **kwargs)`

Bases: `Error`

Introspection data store is disabled.

`exception ironic_inspector.utils.NoAvailableConductor(msg, **kwargs)`

Bases: `Error`

No available conductor in the service group.

`exception ironic_inspector.utils.NodeNotFoundError(**kwargs)`

Bases: `Error`

The node was not found in the database.

```
exception ironic_inspector.utils.NodeStateInvalidEvent(msg, code=400,
                                                       log_level='error', **kwargs)
```

Bases: [Error](#)

Invalid event attempted.

```
exception ironic_inspector.utils.NodeStateRaceCondition(*args, **kwargs)
```

Bases: [Error](#)

State mismatch between the DB and a node_info.

```
exception ironic_inspector.utils.NotFoundInCacheError(msg, code=404, **kwargs)
```

Bases: [Error](#)

Exception when node was not found in cache during processing.

```
class ironic_inspector.utils.ProcessingLoggerAdapter(logger, extra=None)
```

Bases: [KeywordArgumentAdapter](#)

```
process(msg, kwargs)
```

Process the logging message and keyword arguments passed in to a logging call to insert contextual information. You can either manipulate the message itself, the keyword args or both. Return the message and kwargs modified (or not) to suit your needs.

Normally, you'll only need to override this one method in a LoggerAdapter subclass for your specific needs.

```
exception ironic_inspector.utils.RuleNotFoundError(uuid, *args, **kwargs)
```

Bases: [Error](#)

The requested rule was not found.

```
exception ironic_inspector.utils.RuleUUIDExistError(uuid, *args, **kwargs)
```

Bases: [Error](#)

Rule requested already exists in the database.

```
ironic_inspector.utils.add_auth_middleware(app)
```

Add authentication middleware to Flask application.

Parameters

app application.

```
ironic_inspector.utils.add_basic_auth_middleware(app)
```

Add HTTP Basic authentication middleware to Flask application.

Parameters

app application.

```
ironic_inspector.utils.add_cors_middleware(app)
```

Create a CORS wrapper

Attach ironic-inspector-specific defaults that must be included in all CORS responses.

Parameters

app application

```
ironic_inspector.utils.add_healthcheck_middleware(app)
```

Add healthcheck middleware

Parameters

app application

```
ironic_inspector.utils.check_auth(request, rule=None, target=None)
```

Check authentication on request.

Parameters

- **request** Flask request
- **rule** policy rule to check the request against
- **target** dict-like structure to check rule against

Raises

utils.Error if access is denied

```
ironic_inspector.utils.executor()
```

Return the current futures executor.

```
ironic_inspector.utils.getProcessingLogger(name)
```

```
ironic_inspector.utils.get_inventory(data, node_info=None)
```

Get and validate the hardware inventory from introspection data.

```
ironic_inspector.utils.get_ipmi_address_from_data(introspection_data)
```

```
ironic_inspector.utils.get_ipmi_v6address_from_data(introspection_data)
```

```
ironic_inspector.utils.get_pxe_mac(introspection_data)
```

```
ironic_inspector.utils.get_valid_macs(data)
```

Get a list of valid MACs from the introspection data.

```
ironic_inspector.utils.iso_timestamp(timestamp=None, tz=datetime.timezone.utc)
```

Return an ISO8601-formatted timestamp (tz: UTC) or None.

Parameters

- **timestamp** such as time.time() or None
- **tz** timezone

Returns

an ISO8601-formatted timestamp, or None

```
ironic_inspector.utils.processing_logger_prefix(data=None, node_info=None)
```

Calculate prefix for logging.

Tries to use: * node UUID, node._state * node PXE MAC, * node BMC address

Parameters

- **data** introspection data
- **node_info** NodeInfo or ironic node object

Returns

logging prefix as a string

ironic_inspector.version module

ironic_inspector.wsgi_service module

class `ironic_inspector.wsgi_service.WSGIService`

Bases: Service

Provides ability to launch API from wsgi app.

reset()

Reset server greenpool size to default.

Returns

None

start()

Start serving this service using loaded configuration.

Returns

None

stop()

Stop serving this API.

Returns

None

wait()

Wait for the service to stop serving this API.

Returns

None

Module contents

4.1.8 Ironic Inspector CI

Its important to understand the role of each job in the CI. To facilitate that, we have created the documentation below.

Jobs description

The description of each jobs that runs in the CI when you submit a patch for *openstack/ironic-inspector* is shown in the following table.

Note

All jobs are configured to use a pre-build tinyipa ramdisk, a wholedisk image that is downloaded from a Swift temporary url, *pxe* boot and *ipmi* driver.

Table 1: Table. OpenStack Ironic Inspector CI jobs description

Job name	Description
ironic-inspector-grenade	Deploys Ironic and Ironic Inspector in DevStack and runs upgrade for all enabled services.
ironic-inspector-tempest	Deploys Ironic and Ironic Inspector in DevStack. Runs tempest tests that match the regex <i>InspectorBasicTest</i> and deploys 1 virtual baremetal.
ironic-inspector-tempest-discovery	Deploys Ironic and Ironic Inspector in DevStack. Runs tempest tests that match the regex <i>InspectorDiscovery-Test</i> and deploys 1 virtual baremetal.
ironic-inspector-tempest-python3	Deploys Ironic and Ironic Inspector in DevStack under Python3. Runs tempest tests that match the regex <i>Inspector</i> and deploys 1 virtual baremetal.
openstack-tox-functional-py36	Run tox-based functional tests for Ironic Inspector under Python3.6
bifrost-integration-tinyipa-ubuntu-xenial	Tests the integration between Ironic Inspector and Bifrost.
ironic-inspector-tox-bandit	Runs bandit security tests in a tox environment to find known issues in the Ironic Inspector code.

**CHAPTER
FIVE**

INDICES AND TABLES

- genindex
- modindex
- search

PYTHON MODULE INDEX

|

ironic_inspector, 176
ironic_inspector.api_tools, 159
ironic_inspector.cmd, 119
ironic_inspector.cmd.all, 118
ironic_inspector.cmd.conductor, 118
ironic_inspector.cmd.dbsync, 118
ironic_inspector.cmd.migration, 119
ironic_inspector.cmd.status, 119
ironic_inspector.cmd.wsgi, 119
ironic_inspector.common, 127
ironic_inspector.common.context, 119
ironic_inspector.common.coordination,
 120
ironic_inspector.common.ironic, 120
ironic_inspector.common.keystone, 122
ironic_inspector.common.lldp_parsers,
 122
ironic_inspector.common.lldp_tlv, 124
ironic_inspector.common.locking, 125
ironic_inspector.common.rpc, 125
ironic_inspector.common.rpc_service,
 126
ironic_inspector.common.service_utils,
 126
ironic_inspector.common.swift, 126
ironic_inspector.conductor, 128
ironic_inspector.conductor.manager, 127
ironic_inspector.conf, 130
ironic_inspector.conf.accelerators, 128
ironic_inspector.conf.capabilities, 128
ironic_inspector.conf.coordination, 128
ironic_inspector.conf.default, 128
ironic_inspector.conf.discovery, 128
ironic_inspector.conf.dnsmasq_pxe_filter,
 129
ironic_inspector.conf.extra_hardware,
 129
ironic_inspector.conf.healthcheck, 129
ironic_inspector.conf.iptables, 129
ironic_inspector.conf.ironic, 129

ironic_inspector.conf.opts, 129
ironic_inspector.conf.pci_devices, 129
ironic_inspector.conf.port_physnet, 129
ironic_inspector.conf.processing, 130
ironic_inspector.conf.pxe_filter, 130
ironic_inspector.conf.service_catalog,
 130
ironic_inspector.conf.swift, 130
ironic_inspector.db, 138
ironic_inspector.db.api, 130
ironic_inspector.db.migration, 135
ironic_inspector.db.model, 136
ironic_inspector.introspect, 159
ironic_inspector.introspection_state,
 160
ironic_inspector.main, 161
ironic_inspector.node_cache, 162
ironic_inspector.plugins, 154
ironic_inspector.plugins.accel_device,
 138
ironic_inspector.plugins.base, 138
ironic_inspector.plugins.base_physnet,
 141
ironic_inspector.plugins.capabilities,
 142
ironic_inspector.plugins.discovery, 142
ironic_inspector.plugins.example, 142
ironic_inspector.plugins.extra_hardware,
 143
ironic_inspector.plugins.introspection_data,
 144
ironic_inspector.plugins.lldp_basic,
 145
ironic_inspector.plugins.local_link_connection,
 145
ironic_inspector.plugins.pci_devices,
 146
ironic_inspector.plugins.physnet_cidr_map,
 146
ironic_inspector.plugins.raid_device,
 147

ironic_inspector.plugins.rules, 147
ironic_inspector.plugins.standard, 153
ironic_inspector.policy, 170
ironic_inspector.process, 171
ironic_inspector.pxe_filter, 159
ironic_inspector.pxe_filter.base, 154
ironic_inspector.pxe_filter.dnsmasq,
 156
ironic_inspector.pxe_filter.interface,
 157
ironic_inspector.pxe_filter.iptables,
 158
ironic_inspector.rules, 171
ironic_inspector.utils, 173
ironic_inspector.version, 176
ironic_inspector.wsgi_service, 176

INDEX

A

abort(*ironic_inspector.introspection_state.Events attribute*), 160
abort() (*in module ironic_inspector.introspect*), 159
abort_end(*ironic_inspector.introspection_state.Events attribute*), 160
aborting(*ironic_inspector.introspection_state.States attribute*), 160
AccelDevicesHook (*class in ironic_inspector.plugins.accel_device*), 138
acquire() (*ironic_inspector.common.locking.BaseLock method*), 125
acquire() (*ironic_inspector.common.locking.InternalLock method*), 125
acquire() (*ironic_inspector.common.locking.ToozLock method*), 125
acquire_lock()
 (*ironic_inspector.node_cache.NodeInfo method*), 162
action(*ironic_inspector.db.model.RuleAction attribute*), 137
actions (*ironic_inspector.db.model.Rule attribute*), 137
actions_schema() (*in module ironic_inspector.rules*), 172
active_macs() (*in module ironic_inspector.node_cache*), 166
add_alembic_command() (*in module ironic_inspector.cmd.dbsync*), 118
add_attribute()
 (*ironic_inspector.node_cache.NodeInfo method*), 163
add_auth_middleware() (*in module ironic_inspector.utils*), 174
add_auth_options() (*in module ironic_inspector.common.keystone*), 122
add_basic_auth_middleware() (*in module ironic_inspector.utils*), 174
add_capabilities()
 (*ironic_inspector.common.lldp_parsers.LLDPBasicMgmt method*), 122
add_command_parsers() (*in module ironic_inspector.cmd.dbsync*), 118
add_cors_middleware() (*in module ironic_inspector.utils*), 174
add_dot1_link_aggregation()
 (*ironic_inspector.common.lldp_parsers.LLDPParser method*), 123
add_dot1_port_protocol_vlan()
 (*ironic_inspector.common.lldp_parsers.LLDPdot1Parser method*), 124
add_dot1_protocol_identities()
 (*ironic_inspector.common.lldp_parsers.LLDPdot1Parser method*), 124
add_dot1_vlans()
 (*ironic_inspector.common.lldp_parsers.LLDPdot1Parser method*), 124
add_dot3_macphy_config()
 (*ironic_inspector.common.lldp_parsers.LLDPdot3Parser method*), 124
add_healthcheck_middleware() (*in module ironic_inspector.utils*), 174
add_mgmt_address()
 (*ironic_inspector.common.lldp_parsers.LLDPBasicMgmt method*), 122
add_nested_value()
 (*ironic_inspector.common.lldp_parsers.LLDPParser method*), 123
add_node() (*in module ironic_inspector.db.api*), 130
add_node() (*in module ironic_inspector.node_cache*), 166
add_single_value()
 (*ironic_inspector.common.lldp_parsers.LLDPParser method*), 123
add_trait() (*ironic_inspector.node_cache.NodeInfo method*), 163
add_version_headers() (*in module ironic_inspector.main*), 161

```
AddTraitAction          (class      in  apply() (ironic_inspector.plugins.rules.SetCapabilityAction
    ironic_inspector.plugins.rules), 147           method), 152
aliases(ironic_inspector.plugins.pci_devices.PciDevice)applyActions()
    attribute), 146                                (ironic_inspector.rules.IntrospectionRule
all() (ironic_inspector.introspection_state.Events           method), 172
    class method), 160
all() (ironic_inspector.introspection_state.States           as_dict() (ironic_inspector.db.model.RuleAction
    class method), 160           method), 137
allow_NONE(ironic_inspector.plugins.base.RuleConditionPlug
    attribute), 139                                as_dict() (ironic_inspector.db.model.RuleCondition
allow_NONE(ironic_inspector.plugins.rules.EmptyCondition method), 172
    attribute), 148                                Attribute (class in ironic_inspector.db.model),
api() (in module ironic_inspector.main), 161
api_continue() (in module ironic_inspector.main), 161
api_introspection() (in module ironic_inspector.main), 161
api_introspection_abort() (in module ironic_inspector.main), 161
api_introspection_data() (in module ironic_inspector.main), 161
api_introspection_reapply() (in module ironic_inspector.main), 161
api_introspection_statuses() (in module ironic_inspector.main), 161
api_introspection_unprocessed_data() (in module ironic_inspector.main), 161
api_root() (in module ironic_inspector.main), 161
api_rule() (in module ironic_inspector.main), 161
api_rules() (in module ironic_inspector.main), 161
append_value()          (ironic_inspector.common.lldp_parsers.LLDPParser(ironic_inspector.plugins.example.ExampleProcessingHook
    method), 123                                method), 142
apply() (in module ironic_inspector.rules), 172
apply() (ironic_inspector.plugins.base.RuleActionPlugin     before_processing()
    method), 139                                (ironic_inspector.plugins.raid_device.RaidDeviceDetection
apply() (ironic_inspector.plugins.example.ExampleProcessingHook
    method), 143                                before_processing()
before_processing()          (ironic_inspector.plugins.standard.RamdiskErrorHook
method), 147                                method), 153
apply() (ironic_inspector.plugins.rules.AddTraitAction     before_processing()
    method), 147                                (ironic_inspector.plugins.accel_device.AccelDevicesHook
apply() (ironic_inspector.plugins.rules.ExtendAttributeAction
    method), 149                                before_update()
apply() (ironic_inspector.plugins.rules.FailAction        before_update()
    method), 149                                (ironic_inspector.plugins.accel_device.AccelDevicesHook
apply() (ironic_inspector.plugins.rules.RemoveTraitAction
    method), 151                                before_update()
apply() (ironic_inspector.plugins.rules.SetAttributeAction
    method), 152                                (ironic_inspector.plugins.base.ProcessingHook
method), 139
```

B

```
BaseFilter            (class      in
    ironic_inspector.pxe_filter.base), 154
BaseLock              (class      in
    ironic_inspector.common.locking), 125
BasePhysnetHook       (class      in
    ironic_inspector.plugins.base_physnet), 141
BaseStorageBackend    (class      in
    ironic_inspector.plugins.introspection_data), 144
before_processing()  (ironic_inspector.plugins.base.ProcessingHook
method), 138
before_processing()  (ironic_inspector.plugins.example.ExampleProcessingHook
method), 142
before_processing()  before_processing()
before_processing()  (ironic_inspector.plugins.standard.RamdiskErrorHook
method), 147
before_processing()  before_processing()
before_processing()  (ironic_inspector.plugins.accel_device.AccelDevicesHook
method), 153
before_update()        before_update()
before_update()        (ironic_inspector.plugins.accel_device.AccelDevicesHook
method), 154
before_update()        before_update()
```

before_update()	(in module ironic_inspector.plugins.base_physnet.BasePhysnetHook), 141	check() (ironic_inspector.plugins.rules.MatchesCondition method), 150
before_update()	(ironic_inspector.plugins.capabilities.CapabilitiesHook), 142	check() (ironic_inspector.plugins.rules.NetCondition method), 150
before_update()	(ironic_inspector.plugins.example.ExampleProcessingHook), 142	check() (ironic_inspector.plugins.rules.SimpleCondition method), 153
before_update()	(ironic_inspector.plugins.extra_hardware.EthernetHardwareHook), 143	check_api_version() (in module ironic_inspector.main), 161
before_update()	(ironic_inspector.plugins.lldp_basic.LLDPBasicHook), 145	check_auth() (in module ironic_inspector.utils), 175
before_update()	(ironic_inspector.plugins.local_link_connection.GeneralLinkConnectionHook), 145	check_provisioning_hookstate() (in module ironic_inspector.common.ironic), 121
before_update()	(ironic_inspector.plugins.local_link_connection.GeneralLinkConnectionHook), 145	check_scope() (ironic_inspector.rules.IntrospectionRule class), 172
before_update()	(ironic_inspector.plugins.pci_devices.PciDevicesHook), 146	clean_up() (in module ironic_inspector.cmd.status), 119
before_update()	(ironic_inspector.plugins.raid_device.RaidDeviceHook), 147	coerce() (in module ironic_inspector.node_cache), 166
before_update()	(ironic_inspector.plugins.standard.RootDiskSelectionHook), 154	conditions (ironic_inspector.db.model.Rule at-class), 153
before_update()	(ironic_inspector.plugins.standard.ScheduleCoordinatorManager), 154	conditions_schema() (in module ironic_inspector.rules), 172
before_update()	(ironic_inspector.plugins.standard.ValidateContainsCondition), 154	CoordinatorManager (class in ironic_inspector.conductor.manager), 127
bytes_to_int()	(in module ironic_inspector.common.lldp_tlv), 124	convert_exceptions() (in module ironic_inspector.main), 162
C		Coordinator (class in ironic_inspector.common.coordination), 120
call_with_retries()	(in module ironic_inspector.common.ironic), 120	create() (in module ironic_inspector.rules), 172
capabilities_to_dict()	(in module ironic_inspector.common.ironic), 121	create_link_object() (in module ironic_inspector.main), 162
CapabilitiesHook	(class in ironic_inspector.plugins.capabilities), 142	create_node() (in module ironic_inspector.db.api), 130
check()	(ironic_inspector.plugins.base.RuleCondition), 140	create_node() (in module ironic_inspector.node_cache), 166
check()	(ironic_inspector.plugins.rules.ContainsCondition), 148	create_ports() (ironic_inspector.common.swift.SwiftAPI method), 126
check()	(ironic_inspector.plugins.rules.EmptyCondition), 148	create_ports() (ironic_inspector.node_cache.NodeInfo method), 163

```

create_rule()           (in      module do_alembic_command()      (in      module
                                         ironic_inspector.db.api), 131   ironic_inspector.cmd.dbsync), 118
create_schema()         (in      module do_continue() (ironic_inspector.conductor.manager.ConductorM
                                         ironic_inspector.db.migration), 135   ethod), 127
created_at (ironic_inspector.db.model.Rule at- do_introspection()
                                         tribute), 137   (ironic_inspector.conductor.manager.ConductorManager
                                                               method), 127
D
data (ironic_inspector.db.model.IntrospectionData
      attribute), 136
DatabaseStore          (class     in      module do_reapply() (ironic_inspector.conductor.manager.ConductorM
                                         ironic_inspector.plugins.introspection_data)   ethod), 127
                                         144
downgrade()            (in      module do_revision() (in      module
                                         ironic_inspector.db.migration), 135   ironic_inspector.cmd.dbsync), 118
DeferredBasicAuthMiddleware (class   in      driver()      (in      module
                                         ironic_inspector.utils), 173   ironic_inspector.pxe_filter.base), 156
del_host()              (ironic_inspector.conductor.manager.ConductorManager
                           method), 127
E
EmptyCondition         (class     in      module do_revision() (in      module
                                         ironic_inspector.plugins.rules), 148   ironic_inspector.cmd.dbsync), 118
enroll_node_not_found_hook() (in      module downgrade()      (in      module
                                         ironic_inspector.plugins.discovery), 142   ironic_inspector.db.migration), 135
enrolling(ironic_inspector.introspection_state.States
attribute), 160
EqCondition             (class     in      module driver()      (in      module
                                         ironic_inspector.plugins.rules), 148   ironic_inspector.pxe_filter.base), 156
Error, 173
error (ironic_inspector.db.model.Node attribute),
      136
error (ironic_inspector.introspection_state.Events
      attribute), 160
error (ironic_inspector.introspection_state.States
      attribute), 161
Events                  (class     in      module Enfor_response()      (in      module
                                         ironic_inspector.main), 162   ironic_inspector.introspection_state),
Events (class in ironic_inspector.pxe_filter.base),
      155
example_not_found_hook() (in      module Events      (class     in
                                         ironic_inspector.plugins.example), 143   ironic_inspector.introspection_state),
ExampleProcessingHook    (class     in      module Enfor_response()      (in      module
                                         ironic_inspector.plugins.example), 143   ironic_inspector.introspection_state),
                                         142
ExampleRuleAction        (class     in      module ExampleProcessingHook    (class     in
                                         ironic_inspector.plugins.example), 143   ironic_inspector.introspection_state),
                                         142
executor()              (in      module ExampleRuleAction        (class     in
                                         ironic_inspector.utils), 175   ironic_inspector.plugins.example),
                                         143
ExtendedAttributeAction  (class     in      module executor() (in      module
                                         ironic_inspector.plugins.rules), 149   ironic_inspector.utils), 175
do_abort()              (ironic_inspector.conductor.manager.ConductorManager
                           method), 127

```

<code>ExtraHardwareHook</code>	(class in <code>method</code>), 154
	<code>ironic_inspector.plugins.extra_hardware), fsm_transition()</code> (in module <code>ironic_inspector.node_cache</code>), 167
<code>143</code>	
F	G
<code>FailAction</code>	(class in <code>ironic_inspector.plugins.rules</code>), 149
<code>field</code> (<code>ironic_inspector.db.model.RuleCondition</code> attribute), 137	<code>GeCondition</code> (class in <code>ironic_inspector.plugins.rules</code>), 149
<code>FilterDriver</code>	(class in <code>ironic_inspector.pxe_filter.interface</code>), 157
<code>find_node()</code> (in module <code>ironic_inspector.node_cache</code>), 167	<code>generate_introspection_status()</code> (in module <code>ironic_inspector.main</code>), 162
<code>finish</code> (<code>ironic_inspector.introspection_state.Events</code> attribute), 160	<code>generate_resource_data()</code> (in module <code>ironic_inspector.main</code>), 162
<code>finished</code> (<code>ironic_inspector.introspection_state.States</code> attribute), 161	<code>GenericLocalLinkConnectionHook</code> (class in <code>ironic_inspector.plugins.local_link_connection</code>), 145
<code>finished()</code> (<code>ironic_inspector.node_cache.NodeInfo</code> method), 163	
<code>finished_at</code> (<code>ironic_inspector.db.model.Node</code> attribute), 136	<code>get()</code> (<code>ironic_inspector.plugins.introspection_data.BaseStorageBa</code>
<code>FORMATTED_PARAMS</code>	
	<code>get_active_macs()</code> (in module <code>ironic_inspector.pxe_filter.base</code>), 156
	<code>get_active_nodes()</code> (in module <code>ironic_inspector.common.keystone</code>), 144
<code>FORMATTED_PARAMS</code>	<code>get_adapter()</code> (in module <code>ironic_inspector.common.keystone</code>), 144
	<code>get_all()</code> (in module <code>ironic_inspector.rules</code>), 173
<code>FORMATTED_PARAMS</code>	
	<code>get_attributes()</code> (in module <code>ironic_inspector.main</code>), 132
	<code>get_capability()</code> (in module <code>ironic_inspector.main</code>), 162
<code>from_dict()</code> (<code>ironic_inspector.common.context.RequestContext</code> class method), 119	<code>get_attributes()</code> (in module <code>ironic_inspector.db.api</code>), 132
<code>from_environ()</code>	<code>get_autoneg_cap()</code> (in module <code>ironic_inspector.common.lldp_tlv</code>), 124
<code>from_row()</code> (<code>ironic_inspector.node_cache.NodeInfo</code> class method), 163	<code>get_by_path()</code> (<code>ironic_inspector.node_cache.NodeInfo</code> method), 164
<code>fsm</code> (<code>ironic_inspector.pxe_filter.base.BaseFilter</code> attribute), 154	<code>get_client()</code> (in module <code>ironic_inspector.common.ironic</code>), 121
<code>fsm_event()</code> (<code>ironic_inspector.node_cache.NodeInfo</code> class method), 163	<code>get_client()</code> (in module <code>ironic_inspector.common.rpc</code>), 125
<code>fsm_event_after()</code>	(in module <code>ironic_inspector.node_cache</code>), 167
<code>fsm_event_before()</code>	(in module <code>ironic_inspector.node_cache</code>), 167
<code>fsm_reset_on_error()</code>	(in module <code>ironic_inspector.pxe_filter.base.BaseFilter</code>)
	<code>get_compatible()</code> (in module <code>ironic_inspector.main</code>), 162
	<code>get_coordinator()</code> (in module <code>ironic_inspector.common.coordination</code>), 120
	<code>get_endpoint()</code> (in module <code>ironic_inspector.common.coordination</code>), 120

ironic_inspector.common.keystone),
122
get_enforcer() (in module *ironic_inspector.policy),* 170
get_inactive_macs() (in module *ironic_inspector.pxe_filter.base),* 156
get_introspection_data() (in module *ironic_inspector.common.swift),* 127
get_introspection_data() (in module *ironic_inspector.db.api),* 132
get_introspection_data() (in module *ironic_inspector.node_cache),* 167
get_introspection_data() (in module *ironic_inspector.process),* 171
get_inventory() (in module *ironic_inspector.utils),* 175
get_ipmi_address() (in module *ironic_inspector.common.ironic),* 121
get_ipmi_address_from_data() (in module *ironic_inspector.utils),* 175
get_ipmi_v6address_from_data() (in module *ironic_inspector.utils),* 175
get_ironic_macs() (in module *ironic_inspector.pxe_filter.base),* 156
get_lock() (in module *ironic_inspector.common.locking),*
125
get_lock() (ironic_inspector.common.coordination.method), 120
get_members() (ironic_inspector.common.coordination.method), 120
get_node() (in module *ironic_inspector.common.ironic),* 121
get_node() (in module *ironic_inspector.db.api),*
133
get_node() (in module *ironic_inspector.node_cache),* 168
get_node_list() (in module *ironic_inspector.node_cache),* 168
get_nodes() (in module *ironic_inspector.db.api),*
133
get_object() (ironic_inspector.common.swift.SwiftAPI method), 126
get_options() (in module *ironic_inspector.db.api),* 133
get_oslo_policy_enforcer() (in module *ironic_inspector.policy),* 170
get_periodic_sync_task() (ironic_inspector.pxe_filter.base.BaseFilter method), 155
get_periodic_sync_task() *(ironic_inspector.pxe_filter.base.NoopFilter method),* 156
get_periodic_sync_task() *(ironic_inspector.pxe_filter.interface.FilterDriver method),* 157
get_physnet() (ironic_inspector.plugins.base_physnet.BasePhysnet method), 141
get_physnet() (ironic_inspector.plugins.physnet_cidr_map.Physnet method), 146
get_pxe_mac() (in module *ironic_inspector.utils),* 175
get_random_topic() (in module *ironic_inspector.main),* 162
get_rule() (in module *ironic_inspector.db.api),* 133
get_rules() (in module *ironic_inspector.db.api),* 133
get_rules_actions() (in module *ironic_inspector.db.api),* 133
get_rules_conditions() (in module *ironic_inspector.db.api),* 133
get_server() (in module *ironic_inspector.common.rpc),* 125
get_session() (in module *ironic_inspector.common.keystone),*
122
get_valid_macs() (in module *ironic_inspector.common.Coordinator attribute),* 120
GtCondition *(class* *in* *ironic_inspector.plugins.rules),* 149

H

handle_404() (in module *ironic_inspector.main),*
162
handle_org_specific_tlv() (ironic_inspector.common.lldp_parsers.LLDPBasicMgmt method), 122

|

id (ironic_inspector.db.model.RuleAction attribute), 137
id (ironic_inspector.db.model.RuleCondition attribute), 137
init() (in module *ironic_inspector.common.rpc),*
125
init() (in module *ironic_inspector.db.api),* 134

```
init_enforcer()           (in      module      module, 118
    ironic_inspector.policy), 170           ironic_inspector.cmd.conductor
init_filter() (ironic_inspector.pxe_filter.base.BaseFilterModule, 118
    method), 155                         ironic_inspector.cmd.dbsync
init_filter() (ironic_inspector.pxe_filter.dnsmasq.DnsMasqFilterModule, 118
    method), 157                         ironic_inspector.cmd.migration
init_filter() (ironic_inspector.pxe_filter.interface.FilterModule, 119
    method), 157                         ironic_inspector.cmd.status
init_filter() (ironic_inspector.pxe_filter.iptables.IptablesFilterModule, 119
    method), 158                         ironic_inspector.cmd.wsgi
init_host() (ironic_inspector.conductor.manager.ConductorManager
    method), 127                         ironic_inspector.common
initialize (ironic_inspector.pxe_filter.base.Events
    attribute), 155                      module, 127
                                         ironic_inspector.common.context
initialize_wsgi_app() (in      module      module, 119
    ironic_inspector.cmd.wsgi), 119        ironic_inspector.common.coordination
initialized(ironic_inspector.pxe_filter.base.States
    attribute), 156                      module, 120
                                         ironic_inspector.common.ironic
InternalLock          (class      in      module, 120
    ironic_inspector.common.locking),
    125                           ironic_inspector.common.keystone
                                         module, 122
introspect()           (in      module      module, 122
    ironic_inspector.introspect), 160
                                         ironic_inspector.common.lldp_parsers
introspection_active() (in      module      module, 124
    ironic_inspector.node_cache), 168
                                         ironic_inspector.common.lldp_tlv
introspection_data_manager() (in      module      module, 125
    ironic_inspector.plugins.base), 140
                                         ironic_inspector.common.locking
IntrospectionData       (class      in      module, 125
    ironic_inspector.db.model), 136
                                         ironic_inspector.common.rpc
                                         module, 125
IntrospectionDataNotFound, 173          ironic_inspector.common.rpc_service
                                         module, 126
IntrospectionDataStoreDisabled, 173
IntrospectionRule        (class      in      module, 126
    ironic_inspector.rules), 171
                                         ironic_inspector.common.service_utils
invalidate_cache()       (ironic_inspector.node_cache.NodeInfo
    method), 164                         ironic_inspector.common.swift
                                         module, 126
InvalidFilterDriverState, 156          ironic_inspector.conductor
                                         module, 128
invert (ironic_inspector.db.model.RuleCondition
    attribute), 138                      ironic_inspector.conductor.manager
                                         module, 127
IptablesFilter          (class      in      module, 130
    ironic_inspector.pxe_filter.iptables),
    158                           ironic_inspector.conf
                                         module, 130
ironic   (ironic_inspector.node_cache.NodeInfo
    property), 164                      ironic_inspector.conf.accelerators
                                         module, 128
ironic_inspector          module, 128
                                         ironic_inspector.conf.capabilities
                                         module, 128
                                         ironic_inspector.conf.coordination
                                         module, 128
ironic_inspector.cmd      module, 128
                                         ironic_inspector.conf.default
                                         module, 128
ironic_inspector.cmd.all
                                         ironic_inspector.conf.discovery
                                         module, 128
```

```
ironic_inspector.conf.dnsmasq_pxe_filter      module, 142
    module, 129
ironic_inspector.conf.extra_hardware          module, 129
ironic_inspector.conf.healthcheck            module, 129
ironic_inspector.conf.iptables               module, 129
ironic_inspector.conf.ironic                module, 129
ironic_inspector.conf.opts                  module, 129
ironic_inspector.conf.pci_devices           module, 129
ironic_inspector.conf.port_physnet          module, 129
ironic_inspector.conf.processing            module, 130
ironic_inspector.conf.pxe_filter             module, 130
ironic_inspector.conf.service_catalog       module, 130
ironic_inspector.conf.swift                 module, 130
ironic_inspector.db                         module, 138
ironic_inspector.db.api                     module, 130
ironic_inspector.db.migration              module, 135
ironic_inspector.db.model                  module, 136
ironic_inspector.introspect                module, 159
ironic_inspector.introspection_state       module, 160
ironic_inspector.main                      module, 161
ironic_inspector.node_cache                module, 162
ironic_inspector.plugins                  module, 154
ironic_inspector.plugins.accel_device     module, 138
ironic_inspector.plugins.base              module, 138
ironic_inspector.plugins.base_physnet      module, 141
ironic_inspector.plugins.capabilities     module, 142
ironic_inspector.plugins.discovery        module, 142
ironic_inspector.plugins.example          module, 142
ironic_inspector.plugins.extra_hardware    module, 143
ironic_inspector.plugins.introspection_data module, 144
ironic_inspector.plugins.lldp_basic        module, 145
ironic_inspector.plugins.local_link_connection module, 145
ironic_inspector.plugins.pci_devices       module, 146
ironic_inspector.plugins.physnet_cidr_map  module, 146
ironic_inspector.plugins.raid_device       module, 147
ironic_inspector.plugins.rules              module, 147
ironic_inspector.plugins.standard         module, 153
ironic_inspector.policy                   module, 170
ironic_inspector.process                 module, 171
ironic_inspector.pxe_filter               module, 159
ironic_inspector.pxe_filter.base          module, 154
ironic_inspector.pxe_filter.dnsmasq       module, 156
ironic_inspector.pxe_filter.interface     module, 157
ironic_inspector.pxe_filter.iptables      module, 158
ironic_inspector.rules                   module, 171
ironic_inspector.utils                   module, 173
ironic_inspector.version                 module, 176
ironic_inspector.wsgi_service            module, 176
is_locked() (ironic_inspector.common.locking.BaseLock
            method), 125
is_locked() (ironic_inspector.common.locking.InternalLock
            method), 125
is_locked() (ironic_inspector.common.locking.ToozLock
            method), 125
iso_timestamp()      (in      module
                    ironic_inspector.utils), 175
```

J

`join_group()` (*ironic_inspector.common.coordination.Coordinator*
method), 120
`list_opts()` (in module
ironic_inspector.conf.port_physnet), 129
`list_opts()` (in module
ironic_inspector.conf.processing), 130

K

`KEYS` (*ironic_inspector.plugins.standard.SchedulerHook*
attribute), 154
`list_opts()` (in module
ironic_inspector.conf.pxe_filter), 130
`list_opts()` (in module
ironic_inspector.conf.service_catalog), 130

L

`leave_group()` (*ironic_inspector.common.coordination.Coordinator*
method), 120
`LeCondition` (class in *ironic_inspector.plugins.rules*), 150
`limit_field()` (in module *ironic_inspector.api_tools*), 159
`list_nodes_by_attributes()` (in module *ironic_inspector.db.api*), 134
`list_nodes_options_by_uuid()` (in module *ironic_inspector.db.api*), 134
`list_opts()` (in module *ironic_inspector.conf.accelerators*), 128
`list_opts()` (in module *ironic_inspector.conf.capabilities*), 128
`list_opts()` (in module *ironic_inspector.conf.coordination*), 128
`list_opts()` (in module *ironic_inspector.conf.default*), 128
`list_opts()` (in module *ironic_inspector.conf.discovery*), 128
`list_opts()` (in module *ironic_inspector.conf.dnsmasq_pxe_filter*), 129
`list_opts()` (in module *ironic_inspector.conf.extra_hardware*), 129
`list_opts()` (in module *ironic_inspector.conf.healthcheck*), 129
`list_opts()` (in module *ironic_inspector.conf.iptables*), 129
`list_opts()` (in module *ironic_inspector.conf.ironic*), 129
`list_opts()` (in module *ironic_inspector.conf.opts*), 129
`list_opts()` (in module *ironic_inspector.conf.pci_devices*), 129
`list_opts()` (in module *ironic_inspector.conf.port_physnet*), 129
`list_opts()` (in module *ironic_inspector.conf.processing*), 130
`list_opts()` (in module *ironic_inspector.conf.swift*), 130
`list_policies()` (in module *ironic_inspector.policy*), 170
`LLDPBasicMgmtParser` (class in *ironic_inspector.common.lldp_parsers*), 122
`LLDPBasicProcessingHook` (class in *ironic_inspector.plugins.lldp_basic*), 145
`LLDPdot1Parser` (class in *ironic_inspector.common.lldp_parsers*), 123
`LLDPdot3Parser` (class in *ironic_inspector.common.lldp_parsers*), 124
`LLDPParser` (class in *ironic_inspector.common.lldp_parsers*), 122
`lock_prefix` (*ironic_inspector.common.coordination.Coordinator*
attribute), 120
`locked_driver_event()` (in module *ironic_inspector.pxe_filter.base*), 156
`lookup_node()` (in module *ironic_inspector.common.ironic*), 121
`lookup_node_by_bmc_addresses()` (in module *ironic_inspector.common.ironic*), 122
`lookup_node_by_macs()` (in module *ironic_inspector.common.ironic*), 122
`LtCondition` (class in *ironic_inspector.plugins.rules*), 150

M

`main()` (in module *ironic_inspector.cmd.all*), 118
`main()` (in module *ironic_inspector.cmd.conductor*), 118
`main()` (in module *ironic_inspector.cmd.dbsync*), 118
`main()` (in module *ironic_inspector.cmd.migration*), 119
`main()` (in module *ironic_inspector.cmd.status*), 119

main() (*ironic_inspector.cmd.migration.MigrationTool method*), 119
manage_boot (*ironic_inspector.db.model.Node attribute*), 137
manage_boot (*ironic_inspector.node_cache.NodeInfo property*), 164
mapping_for_enum() (*in module ironic_inspector.common.lldp_tlvs*), 124
mapping_for_switch() (*in module ironic_inspector.common.lldp_tlvs*), 124
marker_field() (*in module ironic_inspector.api_tools*), 159
MatchesCondition (*class in ironic_inspector.plugins.rules*), 150
MigrationTool (*class in ironic_inspector.cmd.migration*), 119
missing_entrypoints_callback() (*in module ironic_inspector.plugins.base*), 140
model_query() (*in module ironic_inspector.db.api*), 134
ModelBase (*class in ironic_inspector.db.model*), 136
module
 ironic_inspector, 176
 ironic_inspector.api_tools, 159
 ironic_inspector.cmd, 119
 ironic_inspector.cmd.all, 118
 ironic_inspector.cmd.conductor, 118
 ironic_inspector.cmd.dbsync, 118
 ironic_inspector.cmd.migration, 119
 ironic_inspector.cmd.status, 119
 ironic_inspector.cmd.wsgi, 119
 ironic_inspector.common, 127
 ironic_inspector.common.context, 119
 ironic_inspector.common.coordination, 120
 ironic_inspector.common.ironic, 120
 ironic_inspector.common.keystone, 122
 ironic_inspector.common.lldp_parsers, 122
 ironic_inspector.common.lldp_tlvs, 124
 ironic_inspector.common.locking, 125
 ironic_inspector.common.rpc, 125
 ironic_inspector.common.rpc_service, 126
 ironic_inspector.common.service_utils, 126
 ironic_inspector.common.swift, 126
 ironic_inspector.conductor, 128
 ironic_inspector.conductor.manager, 127
 ironic_inspector.conf, 130
 ironic_inspector.conf.accelerators, 128
 ironic_inspector.conf.capabilities, 128
 ironic_inspector.conf.coordination, 128
 ironic_inspector.conf.default, 128
 ironic_inspector.conf.discovery, 128
 ironic_inspector.conf.dnsmasq_pxe_filter, 129
 ironic_inspector.conf.extra_hardware, 129
 ironic_inspector.conf.healthcheck, 129
 ironic_inspector.conf.iptables, 129
 ironic_inspector.conf.ironic, 129
 ironic_inspector.conf.opts, 129
 ironic_inspector.conf.pci_devices, 129
 ironic_inspector.conf.port_physnet, 129
 ironic_inspector.conf.processing, 130
 ironic_inspector.conf.pxe_filter, 130
 ironic_inspector.conf.service_catalog, 130
 ironic_inspector.conf.swift, 130
 ironic_inspector.db, 138
 ironic_inspector.db.api, 130
 ironic_inspector.db.migration, 135
 ironic_inspector.db.model, 136
 ironic_inspector.introspect, 159
 ironic_inspector.introspection_state, 160
 ironic_inspector.main, 161
 ironic_inspector.node_cache, 162
 ironic_inspector.plugins, 154
 ironic_inspector.plugins.accel_device, 138
 ironic_inspector.plugins.base, 138
 ironic_inspector.plugins.base_physnet, 141
 ironic_inspector.plugins.capabilities, 142
 ironic_inspector.plugins.discovery,

142
`ironic_inspector.plugins.example`, 142
`ironic_inspector.plugins.extra_hardware`, 143
`ironic_inspector.plugins.introspection_data`, 144
`ironic_inspector.plugins.lldp_basic`, 145
`ironic_inspector.plugins.local_link`, 145
`ironic_inspector.plugins.pci_devices`, 146
`ironic_inspector.plugins.physnet_cidr_map`, 146
`ironic_inspector.plugins.raid_device`, 147
`ironic_inspector.plugins.rules`, 147
`ironic_inspector.plugins.standard`, 153
`ironic_inspector.policy`, 170
`ironic_inspector.process`, 171
`ironic_inspector.pxe_filter`, 159
`ironic_inspector.pxe_filter.base`, 154
`ironic_inspector.pxe_filter.dnsmasq`, 156
`ironic_inspector.pxe_filter.interface`, 157
`ironic_inspector.pxe_filter.iptables`, 158
`ironic_inspector.rules`, 171
`ironic_inspector.utils`, 173
`ironic_inspector.version`, 176
`ironic_inspector.wsgi_service`, 176
`multiple`(`ironic_inspector.db.model.RuleCondition`, 138
`attribute`), 138

N

`name` (`ironic_inspector.db.model.Attribute`, 136
`tribute`), 136
`name` (`ironic_inspector.db.model.Option`, 137
`tribute`), 137
`NeCondition` (`class` in `ironic_inspector.plugins.rules`), 150
`NetCondition` (`class` in `ironic_inspector.plugins.rules`), 150
`NoAvailableConductor`, 173
`Node` (`class` in `ironic_inspector.db.model`), 136
`node()` (`ironic_inspector.node_cache.NodeInfo` method), 164

`node_not_found_hook_manager()` (`in module ironic_inspector.plugins.base`), 140
`node_uuid` (`ironic_inspector.db.model.Attribute` attribute), 136
`NodeInfo` (`class` in `ironic_inspector.node_cache`), 162
`NodeNotFoundInDBError`, 173
`NodeStateInvalidEvent`, 173
`NodeStateRaceCondition`, 174
`NoopFilter` (`class` in `ironic_inspector.pxe_filter.base`), 156
`NoStore` (`class` in `ironic_inspector.plugins.introspection_data`), 144
`NotFound`, 120
`NotFoundInCacheError`, 174

O

`Octal` (`class` in `ironic_inspector.conf.default`), 128
`op` (`ironic_inspector.db.model.RuleCondition` attribute), 138
`op`(`ironic_inspector.plugins.rules.SimpleCondition` attribute), 153
`op()` (`ironic_inspector.plugins.rules.EqCondition` method), 149
`op()` (`ironic_inspector.plugins.rules.GeCondition` method), 149
`op()` (`ironic_inspector.plugins.rules.GtCondition` method), 150
`op()` (`ironic_inspector.plugins.rules.LeCondition` method), 150
`op()` (`ironic_inspector.plugins.rules.LtCondition` method), 150
`op()` (`ironic_inspector.plugins.rules.NeCondition` method), 150
`option` (`class` in `ironic_inspector.db.model`), 137
`OPTIONAL_PARAMS`
`(ironic_inspector.plugins.base.WithValidation` attribute), 140
`OPTIONAL_PARAMS`
`(ironic_inspector.plugins.rules.ExtendAttributeAction` attribute), 149
`OPTIONAL_PARAMS`
`(ironic_inspector.plugins.rules.SetAttributeAction` attribute), 152
`OPTIONAL_PARAMS`
`(ironic_inspector.plugins.rules.SetCapabilityAction` attribute), 152
`options` (`ironic_inspector.node_cache.NodeInfo` property), 164

P

params (*ironic_inspector.db.model.RuleAction attribute*), 137
params (*ironic_inspector.db.model.RuleCondition attribute*), 138
parse_args() (in module *ironic_inspector.conf.opts*), 129
parse_tlv() (*ironic_inspector.common.lldp_parsers.LLDPParser*.*method*), 123
patch() (*ironic_inspector.node_cache.NodeInfo method*), 164
patch_port() (*ironic_inspector.node_cache.NodeInfo method*), 164
PciDevicesHook (class in *ironic_inspector.plugins.pci_devices*), 146
periodic_clean_up() (in module *ironic_inspector.conductor.manager*), 128
periodic_leader_election() (in module *ironic_inspector.conductor.manager*), 128
PhysnetCidrMapHook (class in *ironic_inspector.plugins.physnet_cidr_map*), 146
ports() (*ironic_inspector.node_cache.NodeInfo method*), 165
prepare_service() (in module *ironic_inspector.common.service_utils*), 126
process (*ironic_inspector.introspection_state.Events attribute*), 160
process() (in module *ironic_inspector.process*), 171
process() (*ironic_inspector.utils.ProcessingLoggerAdapter* *ironic_inspector.conf.dnsmasq_pxe_filter*.*method*), 174
processed (*ironic_inspector.db.model.IntrospectionData attribute*), 136
processing (*ironic_inspector.introspection_state.States attribute*), 161
processing_hooks_manager() (in module *ironic_inspector.plugins.base*), 140
processing_logger_prefix() (in module *ironic_inspector.utils*), 175
ProcessingHook (class in *ironic_inspector.plugins.base*), 138
ProcessingLoggerAdapter (class in *ironic_inspector.utils*), 174

ironic_inspector.plugins.raid_device), 147
raises_coercion_exceptions() (in module *ironic_inspector.api_tools*), 159
RamdiskErrorHook (class in *ironic_inspector.plugins.standard*), 153
reapply (*ironic_inspector.introspection_state.Events attribute*), 160
reapply() (in module *ironic_inspector.process*), 171
reapplying (*ironic_inspector.introspection_state.States attribute*), 161
ReCondition (class in *ironic_inspector.plugins.rules*), 151
record_node() (in module *ironic_inspector.node_cache*), 168
register_auth_opts() (in module *ironic_inspector.common.keystone*), 122
register_opts() (in module *ironic_inspector.conf.accelerators*), 128
register_opts() (in module *ironic_inspector.conf.capabilities*), 128
register_opts() (in module *ironic_inspector.conf.coordination*), 128
register_opts() (in module *ironic_inspector.conf.default*), 128
register_opts() (in module *ironic_inspector.conf.discovery*), 128
register_opts() (in module *ironic_inspector.conf.extra_hardware*), 129
register_opts() (in module *ironic_inspector.conf.healthcheck*), 129
register_opts() (in module *ironic_inspector.conf.iptables*), 129
register_opts() (in module *ironic_inspector.conf.ironic*), 129
register_opts() (in module *ironic_inspector.conf.pci_devices*), 129
register_opts() (in module *ironic_inspector.conf.port_physnet*),

R

RaidDeviceDetection (class in *ironic_inspector.conf.port_physnet*),

129
register_opts() (in module `ironic_inspector.conf.processing`), 130
register_opts() (in module `ironic_inspector.conf.pxe_filter`), 130
register_opts() (in module `ironic_inspector.conf.service_catalog`), 130
register_opts() (in module `ironic_inspector.conf.swift`), 130
release() (`ironic_inspector.common.locking.BaseLock`) (method), 125
release() (`ironic_inspector.common.locking.IntermediateLock`) (method), 125
release() (`ironic_inspector.common.locking.ToozLock`) (method), 125
release_lock() (in module `ironic_inspector.node_cache`), 168
release_lock() (`ironic_inspector.node_cache.NodeInfo`) (method), 165
remove_trait() (`ironic_inspector.node_cache.NodeInfo`) (method), 165
RemoveTraitAction (class in `ironic_inspector.plugins.rules`), 151
replace_field() (`ironic_inspector.node_cache.NodeInfo`) (method), 165
request_field() (in module `ironic_inspector.api_tools`), 159
RequestContext (class in `ironic_inspector.common.context`), 119
REQUIRED_PARAMS (`ironic_inspector.plugins.base.RuleConditionPlugin`) (attribute), 140
REQUIRED_PARAMS (`ironic_inspector.plugins.base.WithValidationRule`) (attribute), 140
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.AddTraitAction`) (attribute), 147
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.EmptyConditionRule`) (attribute), 148
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.ExtendAttributeAction`) (attribute), 149
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.FailAction`)
attribute), 149
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.RemoveTraitAction`) (attribute), 151
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.SetAttributeAction`) (attribute), 152
REQUIRED_PARAMS (`ironic_inspector.plugins.rules.SetCapabilityAction`) (attribute), 152
reset() (`ironic_inspector.pxe_filter.base.Events`) (attribute), 156
reset() (in module `ironic_inspector.plugins.base`), 141
reset() (`ironic_inspector.pxe_filter.base.BaseFilter`) (method), 155
reset() (`ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter`) (method), 157
reset() (`ironic_inspector.pxe_filter.iptables.IptablesFilter`) (method), 158
reset() (`ironic_inspector.wsgi_service.WSGIService`) (method), 176
reset_ironic_session() (in module `ironic_inspector.common.ironic`), 122
reset_swift_session() (in module `ironic_inspector.common.swift`), 127
revision() (in module `ironic_inspector.db.migration`), 135
RootDiskSelectionHook (class in `ironic_inspector.plugins.standard`), 153
RPC_API_VERSION (`ironic_inspector.conductor.manager.ConductorManager`) (attribute), 127
RPCService (class in `ironic_inspector.common.rpc_service`), 126
Rule (class in `ironic_inspector.db.model`), 137
rule (`ironic_inspector.db.model.RuleAction`) (attribute), 137
rule (`ironic_inspector.db.model.RuleCondition`) (attribute), 138
rule_actions_manager() (in module `ironic_inspector.plugins.base`), 141
rule_conditions_manager() (in module `ironic_inspector.plugins.base`), 141
rule_repr() (in module `ironic_inspector.main`), 162
RuleAction (class in `ironic_inspector.db.model`), 137
RuleActionPlugin (class in `ironic_inspector.main`), 137
RuleActionPlugin (class in `ironic_inspector.plugins.base`), 141

<i>ironic_inspector.plugins.base)</i> , 139	<i>start()</i> (<i>ironic_inspector.common.coordination.Coordinator</i> <i>method</i>), 120
RuleCondition (class in <i>ironic_inspector.db.model</i>), 137	<i>start()</i> (<i>ironic_inspector.common.rpc_service.RPCService</i> <i>method</i>), 126
RuleConditionPlugin (class in <i>ironic_inspector.plugins.base</i>), 139	<i>start()</i> (<i>ironic_inspector.wsgi_service.WSGIService</i> <i>method</i>), 176
RuleNotFoundError , 174	<i>start_coordinator()</i> (in module <i>ironic_inspector.main</i>), 162
RuleUUIDExistError , 174	<i>start_to_introspection()</i> (in module <i>ironic_inspector.node_cache</i>), 169
run_elect_coordinator() (<i>ironic_inspector.common.coordination.Coordinator</i> <i>method</i>), 120	<i>started_at</i> (<i>ironic_inspector.db.model.Node</i> at- tribute), 137
S	save() (<i>ironic_inspector.plugins.introspection_data</i> <i>method</i>), 144
save() (<i>ironic_inspector.plugins.introspection_data</i> <i>method</i>), 144	start() (<i>ironic_inspector.introspection_state</i> . <i>States</i> attribute), 161
save() (<i>ironic_inspector.plugins.introspection_data</i> <i>method</i>), 144	start() (<i>ironic_inspector.db.model.Node</i> attribute), 137
save() (<i>ironic_inspector.plugins.introspection_data</i> <i>method</i>), 145	start() (<i>ironic_inspector.node_cache</i> . <i>NodeInfo</i> property), 165
save() (<i>ironic_inspector.plugins.introspection_data</i> <i>method</i>), 145	start() (<i>ironic_inspector.pxe_filter.base.BaseFilter</i> property), 155
SchedulerHook (class in <i>ironic_inspector.plugins.standard</i>), 154	<i>state_field()</i> (in module <i>ironic_inspector.api_tools</i>), 159
scope (<i>ironic_inspector.db.model.Rule</i> attribute), 137	States (class in <i>ironic_inspector.introspection_state</i>), 160
session_for_read() (in module <i>ironic_inspector.db.api</i>), 134	States (class in <i>ironic_inspector.pxe_filter.base</i>), 156
session_for_write() (in module <i>ironic_inspector.db.api</i>), 134	<i>stop()</i> (<i>ironic_inspector.common.coordination.Coordinator</i> <i>method</i>), 120
set_attribute() (in module <i>ironic_inspector.db.api</i>), 134	<i>stop()</i> (<i>ironic_inspector.common.rpc_service.RPCService</i> <i>method</i>), 126
set_config_defaults() (in module <i>ironic_inspector.conf.opts</i>), 129	<i>stop()</i> (<i>ironic_inspector.wsgi_service.WSGIService</i> <i>method</i>), 176
set_cors_middleware_defaults() (in module <i>ironic_inspector.conf.opts</i>), 129	<i>store_introspection_data()</i> (in module <i>ironic_inspector.common.swift</i>), 127
set_option() (in module <i>ironic_inspector.db.api</i>), 134	<i>store_introspection_data()</i> (in module <i>ironic_inspector.db.api</i>), 135
set_option() (<i>ironic_inspector.node_cache</i> . <i>NodeInfo</i> <i>method</i>), 165	<i>store_introspection_data()</i> (in module <i>ironic_inspector.node_cache</i>), 169
set_value() (<i>ironic_inspector.common.lldp_parser</i> . <i>lldp</i> <i>method</i>), 123	<i>store_lldp_introspection_data()</i> (in module <i>ironic_inspector.process</i>), 171
SetAttributeAction (class in <i>ironic_inspector.plugins.rules</i>), 152	SwiftAPI (class in <i>ironic_inspector.common.swift</i>), 126
SetCapabilityAction (class in <i>ironic_inspector.plugins.rules</i>), 152	SwiftStore (class in <i>ironic_inspector.plugins.introspection_data</i>), 145
SimpleCondition (class in <i>ironic_inspector.plugins.rules</i>), 153	sync (<i>ironic_inspector.pxe_filter.base.Events</i> at- tribute), 156
stamp() (in module <i>ironic_inspector.db.migration</i>), 136	sync() (<i>ironic_inspector.pxe_filter.base.BaseFilter</i> <i>method</i>), 155
start (<i>ironic_inspector.introspection_state</i> . <i>Events</i> attribute), 160	sync() (<i>ironic_inspector.pxe_filter.dnsmasq.DnsmasqFilter</i>

V

`sync()` (*ironic_inspector.pxe_filter.interface.FilterDriver*, *method*), 157
`sync()` (*ironic_inspector.pxe_filter.iptables.IptablesFilter*, *method*), 158
`sync_with_ironic()` (in module *ironic_inspector.conductor.manager*), 128

`validate()` (*ironic_inspector.plugins.base.WithValidation*, *method*), 140
`validate()` (*ironic_inspector.plugins.rules.NetCondition*, *method*), 151
`validate()` (*ironic_inspector.plugins.rules.ReCondition*, *method*), 151
`validate()` (*ironic_inspector.plugins.rules.SetAttributeAction*, *method*), 152

`validate_processing_hooks()` (in module *ironic_inspector.plugins.base*), 141

`ValidateInterfacesHook` (class in *ironic_inspector.plugins.standard*), 154

`value` (*ironic_inspector.db.model.Attribute*, *attribute*), 136
`value` (*ironic_inspector.db.model.Option*, *attribute*), 137

`version()` (in module *ironic_inspector.db.migration*), 136

`version_id` (*ironic_inspector.db.model.Node*, *attribute*), 137

`version_id` (*ironic_inspector.node_cache.NodeInfo*, *property*), 166

`version_root()` (in module *ironic_inspector.main*), 162

W

`wait` (*ironic_inspector.introspection_state.Events*, *attribute*), 160
`wait()` (*ironic_inspector.wsgi_service.WSGIService*, *method*), 176

`waiting` (*ironic_inspector.introspection_state.States*, *attribute*), 161

`with_revision()` (in module *ironic_inspector.cmd.dbsync*), 118

`WithValidation` (class in *ironic_inspector.plugins.base*), 140

`WSGIService` (class in *ironic_inspector.wsgi_service*), 176